

SPOTLIGHTS and PROJECTORS outdoor

Lux Ceiling Trim L



The Lux Ceiling range, available in both **Trim** and Trimless versions, offers a selection of downlight spots with concealed lighting. They are available in S,M,**L** sizes, and in different colour temperatures, finishes and optical beams. The use of accessory filters also allows further flexibility in terms of application.

GENERAL INFORMATION	
Number of light source	1
Optic type (beam angle)	14°/34°/53°
Initial Color Temperature	2700K/3000K/4000K
Color Rendering Index	>90
Optic type	lens
Driver included	NO
Light source color	white
IEC Protection class	III
Luminaire color/finish	black/grey anodized aluminum
Mounting	Recessed (plasterboard-wooden)
Connections	wires
Cable	39,37"
Adjustable	No
Dimensions	See pag. 2
Net weight (piece)	1,785lb

OPERATING AND ELECTRICAL	
Input voltage/current	Max 700mA
Input frequency	/

CONTROL AND DIMMING	
Dimmable	YES - According to driver
Compatible controls	1-10V/DALI/DMX/CASAMBI

INITIAL PERFORMANCE	
Initial luminous flux (system flux)	2271lm (3000k)
Luminous flux tolerance	+/- 10%
Initial LED luminaire efficacy	89lm/w
Initial chromaticity	SDCM<3
Initial input power	Max 25,5W (700mA)
Power consumption tolerance	+/- 10%

APPLICATION CONDITION	
Ambient temperature range	-5°F / 122°F (max 350mA)
Performance ambient temperature	95°F


APPROVAL AND APPLICATION	
Ingress protection code	IP65
Mechanical impact protection code	/

OVER TIME PERFORMANCE	
Lumen maintenance at median useful life* 50000 h	L80

REMARKS	

DIMENSIONAL DRAWINGS

Dimensions (inches)

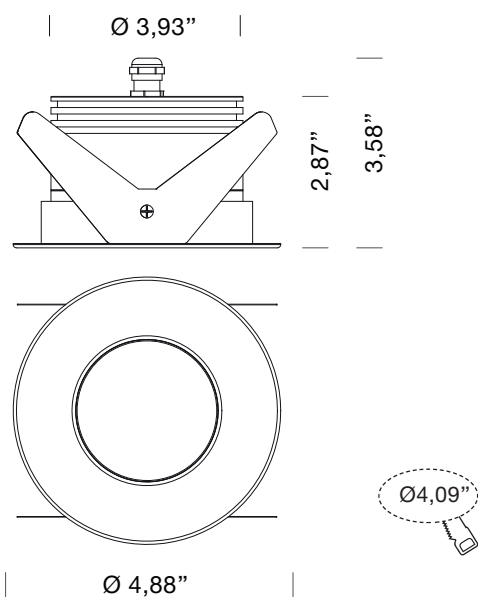

STANDARD FINISHES




Ink Black




Silver Grey

INTERNAL ACCESSORIES

OPAL FILTER (not included)



HONEYCOMB (not included)




ACCESSORI ESTERNI EXTERNAL ACCESSORIES

BCONN2IP68 (not included)




Cable connector IP68 2 ways - direct connection



BCONN4IP68 (not included)



Cable connector IP68 4 ways - series connection



ILTI LUCE
NORTH AMERICA

NEMO USA 1 Cape May St suite 270, Harrison, NJ 07029 - USA; Tel (800) 734-5858 nemolighting.com/usa/; usa@nemolighting.com
ILTI LUCE srl - Strada Borgata Paradiso, 20 - 10036 Settimo Torinese (Italy); tel (39) 011 765 73 01; info@ilti-luce.com

www.ilti-luce.com
06/2026
dati soggetti a modifiche
data subject to change
MADE IN ITALY

CODES

Lux Ceiling Trim / L
Max 700mA (25,5W)

	Optical lens		CCT (K)	Delivered flux		CRI	Bezel		Finishes	Opt. Internal Accs.	Example code: LXLCT0402DFAAH
LXLCT04	02	14°	D	2700	2043lm (700mA)	>90	F	Flat	AA 	H Honeycomb	
	10	34°	W	3000	2271lm (700mA)	>90			AN 	O Opal filter	
	05	53°	N	4000	2498lm (700mA)	>90					

LXLCT04

F

CODE