

SPOTLIGHTS and PROJECTORS outdoor

Lux Wall - Double M (Driver not included)

Lux Wall offers a selection of wall-mounted spots with single or double direct emission. Available in **M** size, featuring different light beams, colour temperatures and finishes and with on-board or **remote** power supply.



GENERAL INFORMATION	
Number of light source	1
Optic type (beam angle)	17°/32°/46°
Initial Color Temperature	2700K/3000K/4000K Blue/Green/Amber/Red
Color Rendering Index	>90
Optic type	lens
Driver included	NO
Light source color	white/coloured
IEC Protection class	III
Luminaire color/finish	black/grey/brown anodized aluminum
Mounting	wall mounted
Connections	quick clamps
Cable	/
Adjustable	NO
Dimensions	See pag.2
Net weight (piece)	0,88 lb

OPERATING AND ELECTRICAL	
Input voltage/current	Max 350mA
Input frequency	/

CONTROL AND DIMMING	
Dimmable	YES - According to driver
Compatible controls	1-10V/DALI/DMX/CASAMBI

INITIAL PERFORMANCE	
Initial luminous flux (system flux)	738lm (3000k)
Luminous flux tolerance	+/- 10%
Initial LED luminaire efficacy	87,8lm/w
Initial chromaticity	SDCM<3
Initial input power	Max 8,4W
Power consumption tolerance	+/- 10%

APPLICATION CONDITION	
Ambient temperature range	-5°F / 95°F
Performance ambient temperature	95°F


APPROVAL AND APPLICATION	
Ingress protection code	IP65
Mechanical impact protection code	/

OVER TIME PERFORMANCE	
Lumen maintenance at median useful life* 50000 h	L80

REMARKS	

DIMENSIONAL DRAWINGS

Dimensions (inches)

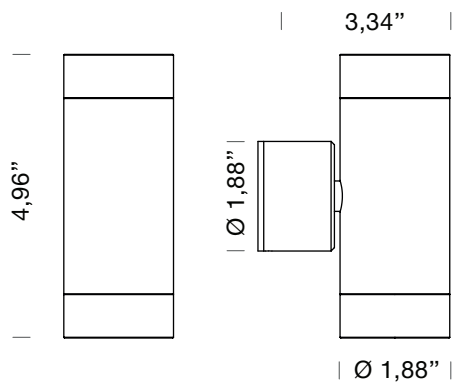

STANDARD FINISHES



Ink Black




Silver Grey




Mocha Brown

INTERNAL ACCESSORIES

OPAL FILTER (not included)



HONEYCOMB (not included)



ILTI LUCE
NORTH AMERICA


NEMO USA 1 Cape May St suite 270, Harrison, NJ 07029 – USA; Tel (800) 734-5858 nemolighting.com/usa/; usa@nemolighting.com
ILTI LUCE srl · Strada Borgata Paradiso, 20 · 10036 Settimo Torinese (Italy); tel (39) 011 765 73 01; info@ilti luce.com

www.ilti luce.com
06/2026
dati soggetti a modifiche
data subject to change
MADE IN ITALY

BCONN2IP68 (not included)




Cable connector IP68 2 ways - direct connection



BCONN4IP68 (not included)



Cable connector IP68 4 ways - series connection



CODICI
CODES

Lux Wall - Double / **M** (Driver not included)
Max 350mA (8,4W)

	Optical lens	CCT (K)	Delivered flux	CRI	Bezel	Finishes	Opt. Internal Accs.	Example code: LXMW20303DFAAH
LXMW203	03 17°	D 2700	664lm (350mA)	>90	F Flat	AA	H Honeycomb	
	09 32°	W 3000	738lm (350mA)	>90		AN	O Opal filter	
	06 46°	N 4000	812lm (350mA)	>90		AM		

LXMW203				F			CODE	
----------------	----------------------	----------------------	----------------------	----------	----------------------	----------------------	-------------	----------------------