

BOLLARD and PROJECTORS outdoor

Mirtilla



Mirtilla is available in two heights and has an adjustability of +/-30°. The optical body is equipped with a micro prismatic screen that allows for wide and diffused light emission.

GENERAL INFORMATION	
Number of light source	1
Optic type (beam angle)	Diffused 70°
Initial Color Temperature	2700K/3000K
Color Rendering Index	>90
Optic type	Microprismatic screen
Driver included	NO
Light source color	white
IEC Protection class	III
Luminaire color/finish	Cetonia Green/ Pine Green/ Lucent Gove/ Ink Black
Mounting	Floor
Connections	Wires
Cable	Cable 22AWGx78,74"
Adjustable	Yes+/-30°
Dimensions	See pag.2
Net weight (piece)	max 1,3 lb

OPERATING AND ELECTRICAL	
Input voltage/current	Max 700mA
Input frequency	/

CONTROL AND DIMMING	
Dimmable	YES - According to driver
Compatible controls	1-10V/DALI/TRIAC

INITIAL PERFORMANCE	
Real luminous flux	150lm (3000K)
Luminous flux tolerance	+/- 10%
Initial LED luminaire efficacy	72lm/W
Initial chromaticity	SDCM<3
Initial input power	max 2,1W
Power consumption tolerance	+/- 10%
BUG rating*	B0 U1 G0
*To be considered only when the luminaire is installed in a fixed position	

APPLICATION CONDITION	
Ambient temperature range	-4/ +122°F
Performance ambient temperature	35°C

APPROVAL AND APPLICATION	
Ingress protection code	IP65
Mechanical impact protection code	IK05



OVER TIME PERFORMANCE	
Lumen maintenance at median useful life* 50000 h	L80

REMARKS	
---------	--

on request: Amber led /fixed version


**DISEGNO TECNICO
DIMENSIONAL DRAWINGS**

Dimensions (inches)

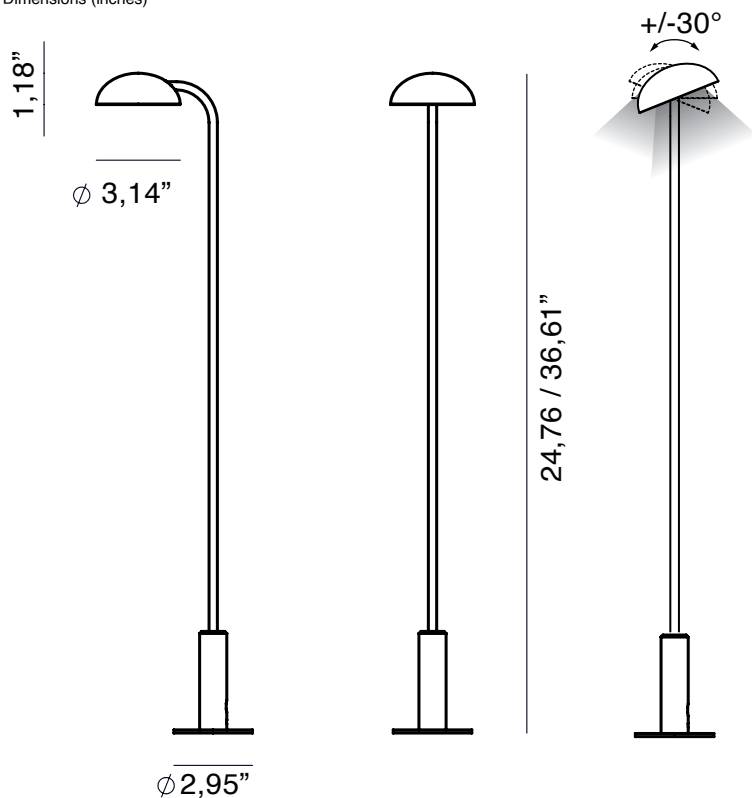


**ACCESSORI
ACCESSORIES**

(not included)

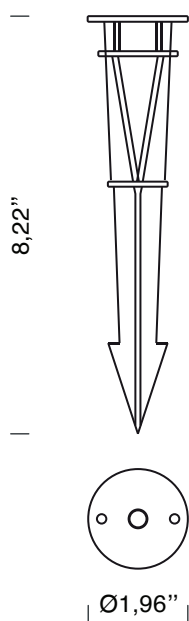

BGREPEG21
(not included)


**FINITURE STANDARD
STANDARD FINISHES**



Cetonia Green



Pine Green

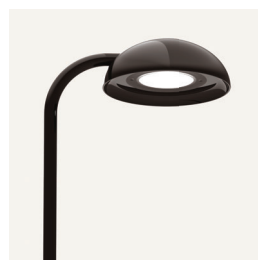

Lucent Grove



Ink Black

ILTI LUCE
NORTH AMERICA

NEMO USA 1 Cape May St suite 270, Harrison, NJ 07029 – USA; Tel (800) 734-5858 nemolighting.com/usa/; usa@nemolighting.com
ILTI LUCE srl · Strada Borgata Paradiso, 20 · 10036 Settimo Torinese (Italy); tel (39) 011 765 73 01; info@ilti luce.com

www.ilti luce.com
07/2026
dati soggetti a modifiche
data subject to change
MADE IN ITALY

CODES

Mirtilla
700mA (2,1W)

	Optical lens	CCT (K)	Delivered flux	CRI	Height	Finishes	Special	Example code: GRMPO0112DMVEU
GRMPO01	12 Diffused	D	2700	147lm (700mA)	>90	M 600 mm	VE	U C/US
		W	3000	150lm (700mA)	>90		NE	
						LG		
						CG		
					A 900 mm	VE		
						NE		
						LG		
						CG		

GRMPO01

12

U

CODE