

BOLLARD and PROJECTORS outdoor

Poppy



Poppy is characterized by a thin rod and a small spot. It is available in two different heights and can be oriented laterally up to 325°. It emits a punctual light, with two optics options available.

INFORMAZIONI GENERALI GENERAL INFORMATION	
Number of light source	1
Optic type (beam angle)	12°/37°
Initial Color Temperature	2700K/3000K
Color Rendering Index	>90
Optic type	lens
Driver included	NO
Light source color	white
IEC Protection class	III
Luminaire color/finish	Cetonia Green/ Pine Green/ Lucent Grey/ Ink Black
Mounting	Floor
Connections	Wires
Cable	Cable 22AWGx78,74"
Adjustable	up to 325°
Dimensions	See pag.2
Net weight (piece)	max 1,3 lb

OPERATING AND ELECTRICAL	
Input voltage/current	Max 700mA
Input frequency	/

CONTROL AND DIMMING	
Dimmable	YES - According to driver
Compatible controls	1-10V/DALI/TRIAC

INITIAL PERFORMANCE	
Real luminous flux	169lm (3000K- 12°)
Luminous flux tolerance	+/- 10%
Initial LED luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Initial input power	max 2,3W
Power consumption tolerance	+/- 10%
BUG rating	B0 U1 G0
*To be considered only when the luminaire is installed in a fixed position	

APPLICATION CONDITION	
Ambient temperature range	-4/+ 122°F
Performance ambient temperature	35°C

APPROVAL AND APPLICATION	
Ingress protection code	IP65
Mechanical impact protection code	IK05


OVER TIME PERFORMANCE	
Lumen maintenance at median useful life* 50000 h	L80

REMARKS	
---------	--


on request: 2400K/fixed version

DIMENSIONAL DRAWINGS


Dimensioni (pollici)
Dimensions (inches)

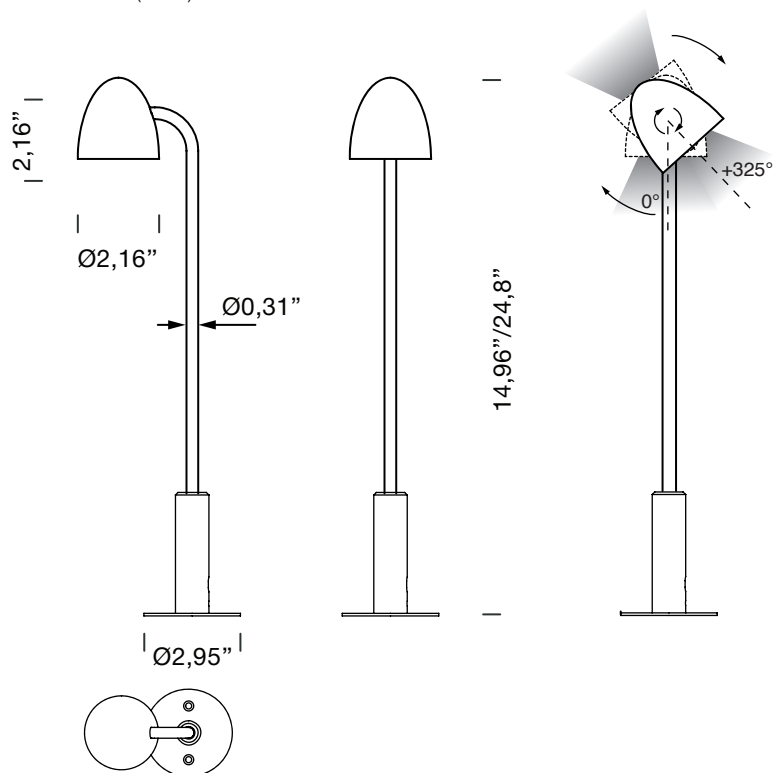

STANDARD FINISHES




Cetonia Green



Pine Green



Lucent Grove




Ink Black


ACCESSORIES

(not included)


Dimensioni (mm)
Dimensions (mm)

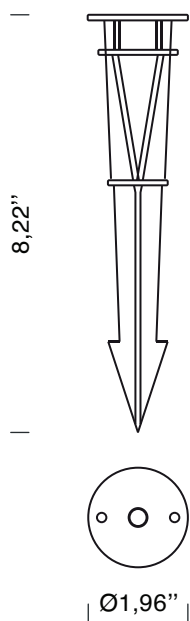

BGREPEG21
(not included)



BGRESNOOT
(not included/external)
BUG RATING B0 U0 G0



BGREPSNOOT65
(not included/external)
BUG RATING B0 U0 G0



HONEYCOMB
(not included/internal)
BUG RATING B0 U0 G0

ILTI LUCE
NORTH AMERICA

NEMO USA 1 Cape May St suite 270, Harrison, NJ 07029 – USA; Tel (800) 734-5858 nemolighting.com/usa/; usa@nemolighting.com
ILTI LUCE srl · Strada Borgata Paradiso, 20 · 10036 Settimo Torinese (Italy); tel (39) 011 765 73 01; info@iltiluce.com

www.iltiluce.com
07/2026
dati soggetti a modifiche
data subject to change
MADE IN ITALY

CODES

Poppy
700mA (2,3W)

	Optical lens		CCT (K)		Delivered flux	CRI	Height		Finishes		Optional internal access.		Special		Example code:
GRPPO08	09	12°	D	2700	165lm (700mA)	>90	P	350 mm	VE		H	Honeycomb	U	C/US	GRPPO0809DPVEU
	11	37°	W	3000	169lm (700mA)	>90			NE						GRPPO0809DPVEHU
									LG						
									CG						
							M	600 mm	VE						
									NE						
									LG						
									CG						

GRPPO08

U

CODE