

LUX INDOOR

Mikroeinbau-LED-Spot für den Innenbereich, geeignet für dekorative Beleuchtung. Gehäuse aus eloxiertem Aluminium. 100 ° Abstrahlwinkel oder Opaloptik. Fixierung durch einer Mutter, zwei Gummi-O-Ringen oder einer Feder.



3000K | 100°

LAMPING

Source	LED
Total power	1,2W
Emission	Direct 100°
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	53lm
Initial luminaire efficacy	44lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	40
Dimensions	Ø1,9x2,8cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, recessed hole Ø 16mm, depth 50mm, cable length 0,25m, spring/nut/O-ring mounting accessory (included), series connection
Accessories	Drivers 350mA,
Net lamp weight	0,45 kg

Codes

BLUX0101717WAA

Structure


grey

PACKAGE

Package 01

Dimension: 15x2,5x11 cm / Gross weight: 0,05 kg

Certificazioni

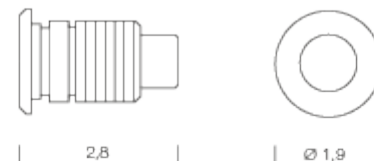

3000K | OPAL

LAMPING

Source	LED
Total power	1,2W
Emission	Diffused
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	53lm
Initial luminaire efficacy	44lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	40
Dimensions	Ø1,9x2,8cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, recessed hole Ø 16mm, depth 50mm, cable length 0,25m, spring/nut/O-ring mounting accessory (included), series connection
Accessories	Drivers 350mA,
Net lamp weight	0,45 kg

Codes

BLUX0101G17WAA

Structure


grey

PACKAGE

Package 01

Dimension: 15x2,5x11 cm / Gross weight: 0,05 kg

Certificazioni

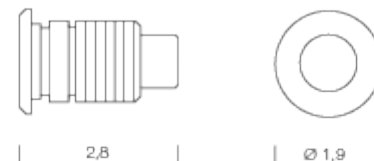

4000K | 100°

LAMPING

Source	LED
Total power	1,2W
Emission	Direct 100°
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	84lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
IP class	40
Dimensions	Ø1,9x2,8cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, recessed hole Ø 16mm, depth 50mm, cable length 0,25m, spring/nut/O-ring mounting accessory (included), series connection
Accessories	Drivers 350mA,
Net lamp weight	0,45 kg

Codes

BLUX0101717NAA

Structure


grey

PACKAGE

Package 01

Dimension: 15x2,5x11 cm / Gross weight: 0,05 kg

Certificazioni

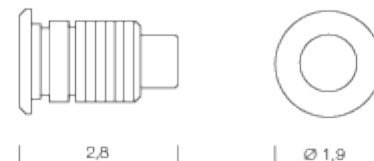

4000K | OPAL

LAMPING

Source	LED
Total power	1,2W
Emission	Diffused
Switching	according to driver
Tension	350mA
Color temperature	4000K
Luminous flux	84lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM < 3
Typ CRI	80
IP class	40
Dimensions	Ø1,9x2,8cm
Materials	Anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, recessed hole Ø 16mm, depth 50mm, cable length 0,25m, spring/nut/O-ring mounting accessory (included), series connection
Accessories	Drivers 350mA,
Net lamp weight	0,45 kg

Codes

BLUX0101G17NAA

Structure

grey

PACKAGE

Package 01

Dimension: 15x2,5x11 cm / Gross weight: 0,25 kg

Certificazioni

