

MINIFLUX TRANSPARENT

MINIFLUX ist ein modulares LED-System für dekorative und Akzentbeleuchtung des Innen- und Außenbereichs.

Hochemissions-LED-Streifen (24V DC) in einem Aluminiumprofil.

Diffusor aus transparentem Polycarbonat. Transparente Polycarbonat-Halterungen erlauben eine flexible Befestigung.

Miniflux ist in verschiedenen Längen und Farbtemperaturen verfügbar.

Der Durchmesser der Röhre aus Polycarbonat ist vom Lichtstrom der Leuchte abhängig.

LED-Driver sind nicht enthalten.



Ø1,6CM | 1M - 2700K

LAMPING

Source	LED strip
Total power	14,5W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1500lm
Initial luminaire efficacy	103lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	Ø1,6x104cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes

BBOK0910041DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

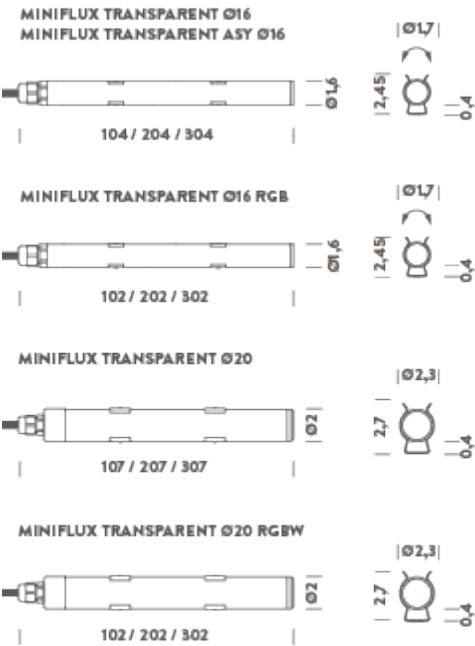

Ø1,6CM | 1M - 3000K

LAMPING

Source	LED strip
Total power	14,5W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1600lm
Initial luminaire efficacy	110lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	Ø1,6x104cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes

BBOK0910041WPC

PACKAGE

Package 01


Certificazioni



Structure

transparent

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

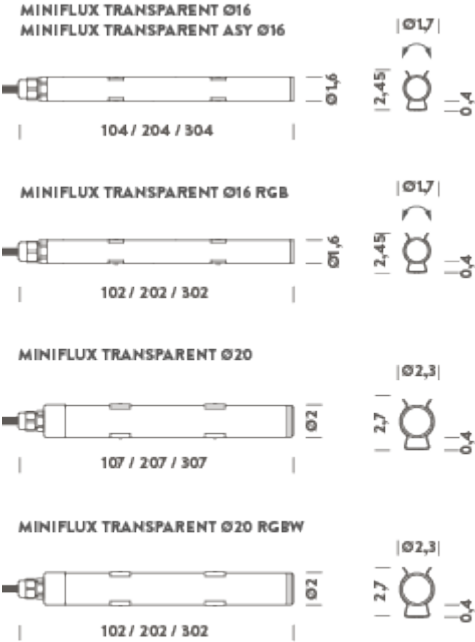

Ø1,6CM | 1M - 4000K

LAMPING

Source	LED strip
Total power	14,5W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1880lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø1,6x104cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes

BBOK0910041NPC


Structure

transparent

PACKAGE

Package 01 Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

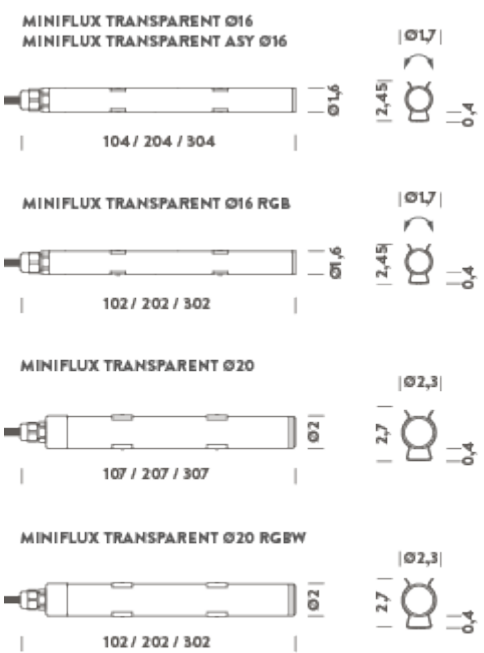

Ø1,6CM | 1M - 2700K ASY

LAMPING

Source	LED strip
Total power	14,5W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1360lm
Initial luminaire efficacy	94lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x104cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes
BBOK0910241DPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

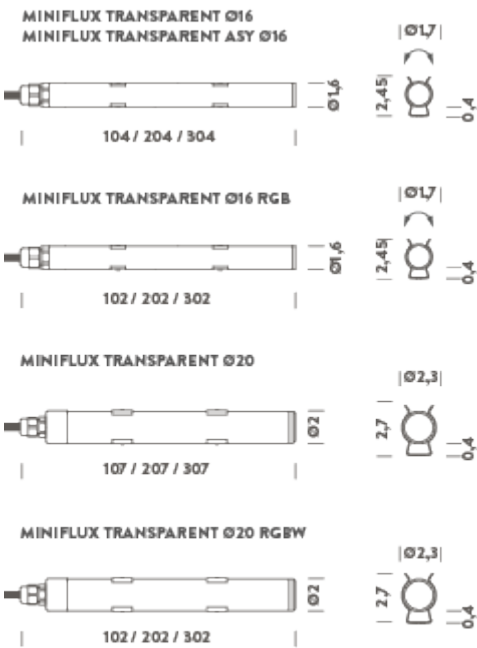

Ø1,6CM | 1M - 3000K ASY

LAMPING

Source	LED strip
Total power	14,5W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1430lm
Initial luminaire efficacy	99lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x107cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes

BBOK0910241WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

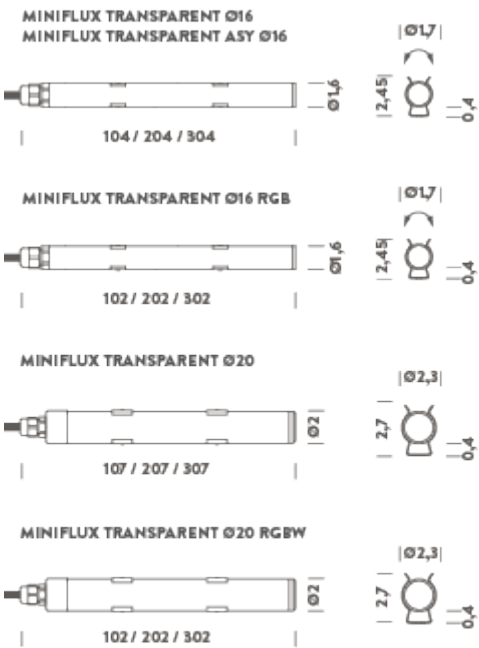

Ø1,6CM | 1M - 4000K ASY

LAMPING

Source	LED strip
Total power	14,5W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1660lm
Initial luminaire efficacy	114lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes

BBOK0910241NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

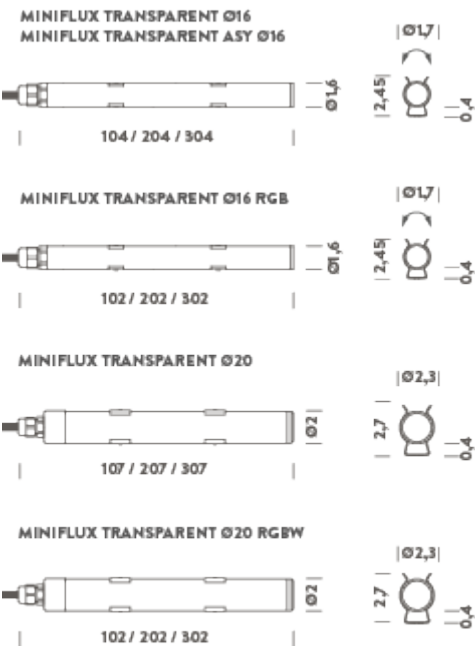

Ø1,6CM | 2M - 2700K

LAMPING

Source	LED strip
Total power	29W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	3000lm
Initial luminaire efficacy	103lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x204cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920041DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

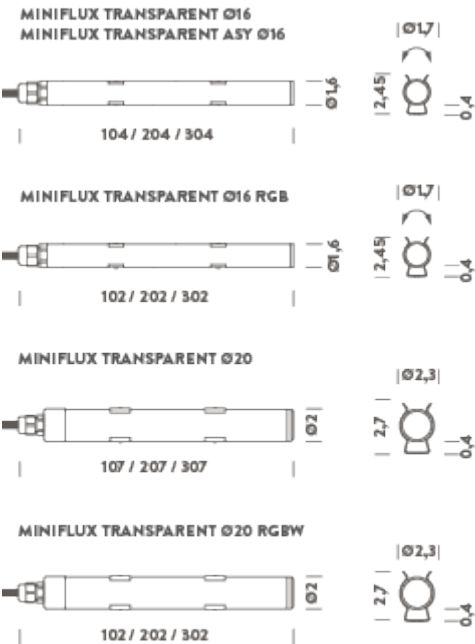

Ø1,6CM | 2M - 3000K

LAMPING

Source	LED strip
Total power	29W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	3200lm
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	Ø1,6x204cm
Materials	polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920041WPC

PACKAGE

Package 01


Certificazioni



Structure

transparent

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

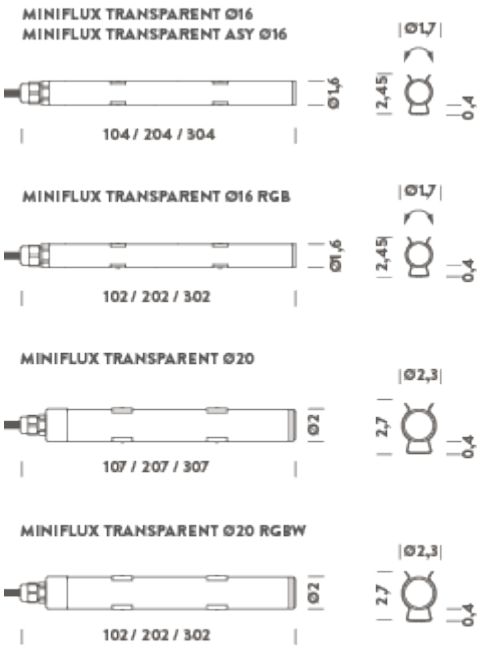

Ø1,6CM | 2M - 4000K

LAMPING

Source	LED strip
Total power	29W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3760lm
Initial luminaire efficacy	110lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	Ø1,6x204cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes
BBOK0920041NPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

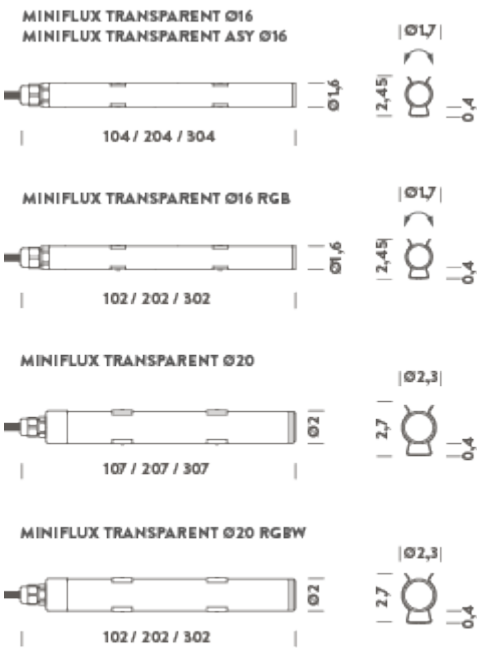

Ø1,6CM | 2M - 2700K ASY

LAMPING

Source	LED strip
Total power	29W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	2720lm
Initial luminaire efficacy	94lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920241DPC

PACKAGE

Package 01


Certificazioni



Structure

transparent

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

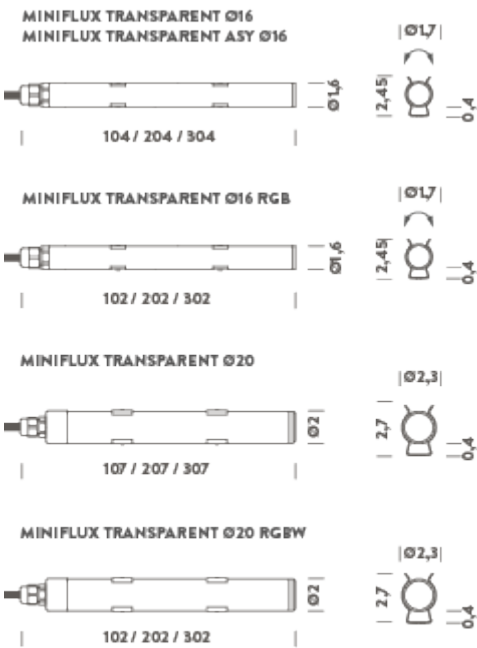

Ø1,6CM | 2M - 3000K ASY

LAMPING

Source	LED strip
Total power	29W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2860lm
Initial luminaire efficacy	99lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes
BBOK0920241WPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

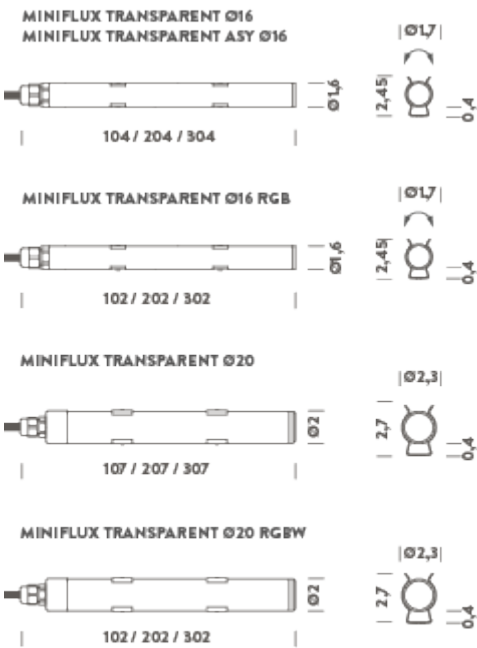

Ø1,6CM | 2M - 4000K ASY

LAMPING

Source	LED strip
Total power	29W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3320lm
Initial luminaire efficacy	114lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920241NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

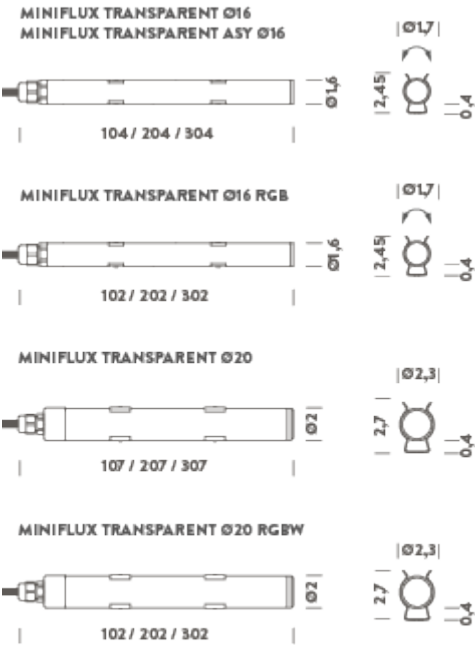

Ø1,6CM | 3M - 2700K

LAMPING

Source	LED strip
Total power	42W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4500lm
Initial luminaire efficacy	107lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x304cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes
BBOK0930041DPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

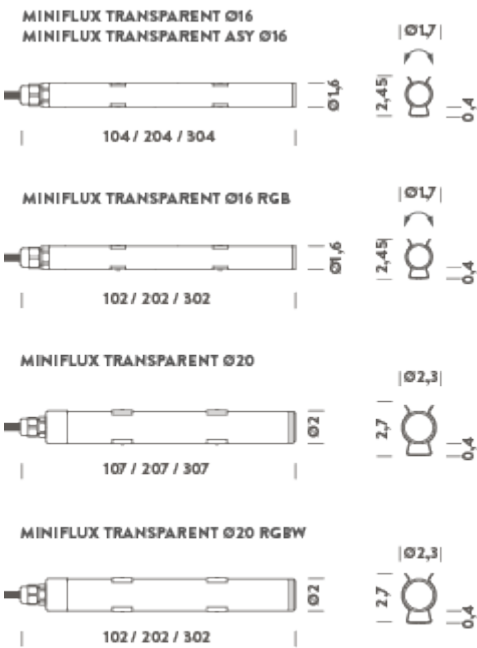

Ø1,6CM | 3M - 3000K

LAMPING

Source	LED strip
Total power	42W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4800lm
Initial luminaire efficacy	114lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x304cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

BBOK0930041WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

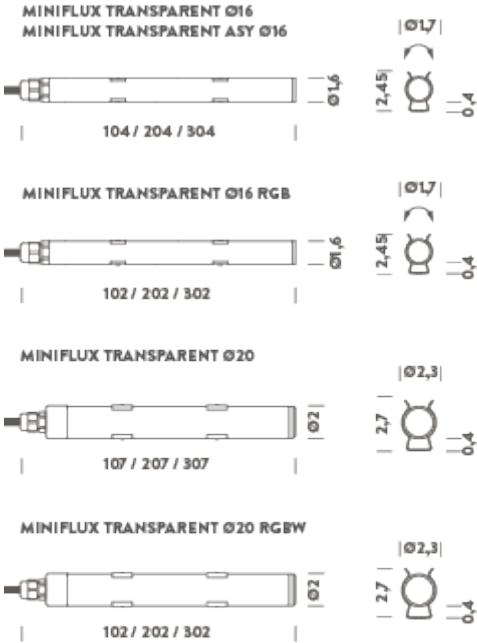

Ø1,6CM | 3M - 4000K

LAMPING

Source	LED strip
Total power	42W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5640lm
Initial luminaire efficacy	134lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø1,6x304cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

BBOK0930041NPC


Structure

transparent

PACKAGE

Package 01 Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

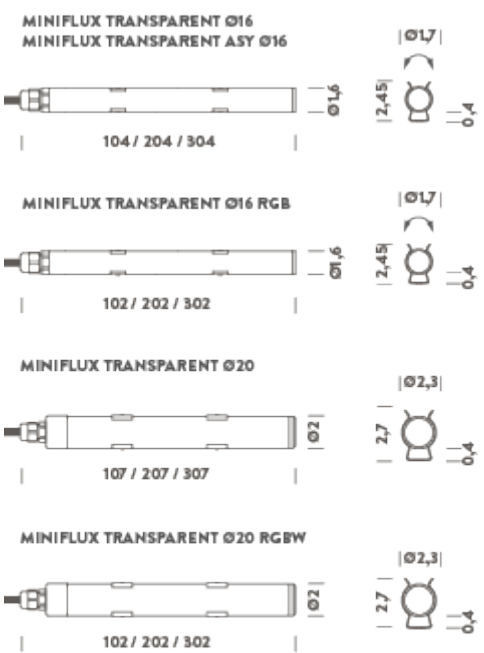

Ø1,6CM | 3M - 2700K ASY

LAMPING

Source	LED strip
Total power	42W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4080lm
Initial luminaire efficacy	97lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes
BBOK0930241DPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

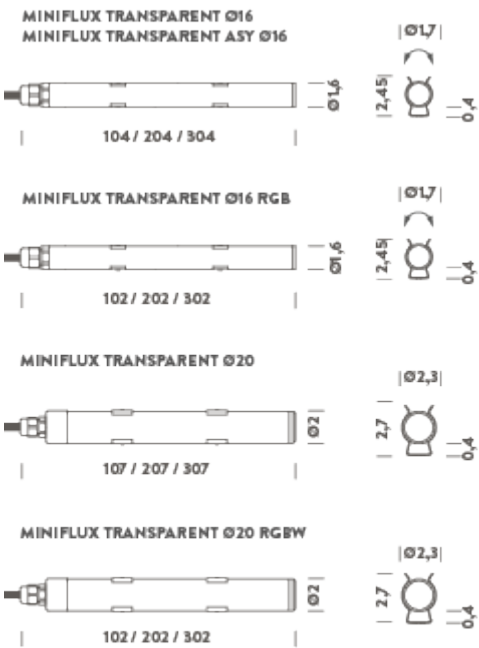

Ø1,6CM | 3M - 3000K ASY

LAMPING

Source	LED strip
Total power	42W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4290lm
Initial luminaire efficacy	102lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes
BBOK0930241WPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

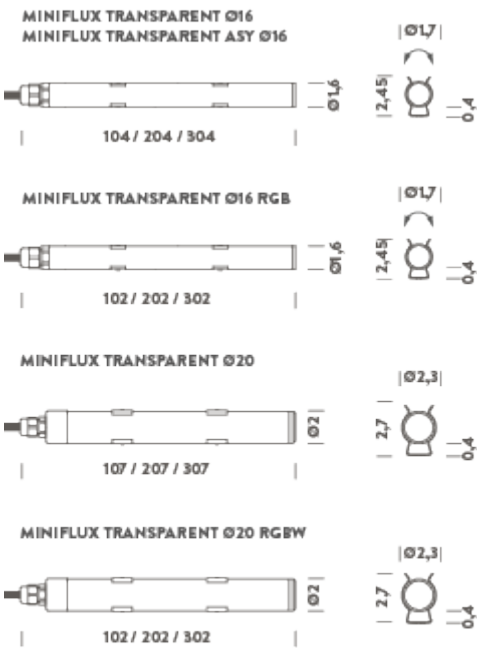

Ø1,6CM | 3M - 4000K ASY

LAMPING

Source	LED strip
Total power	42W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4980lm
Initial luminaire efficacy	119lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes
BBOK0930241NPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

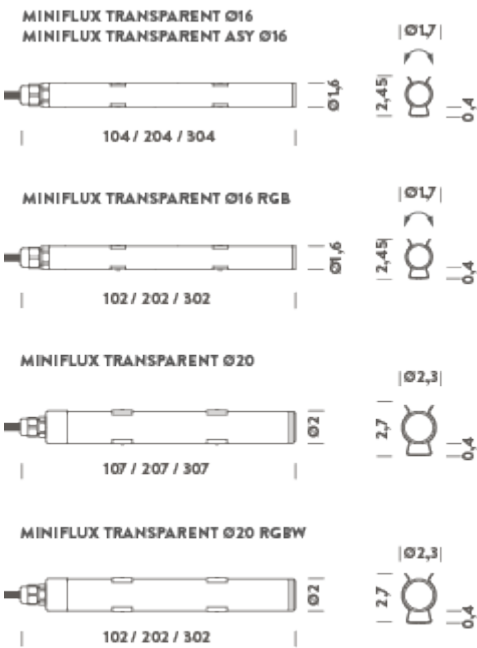

Ø2CM | 1M - 3000K

LAMPING

Source	LED strip
Total power	20W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes
BBOK0910015WPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

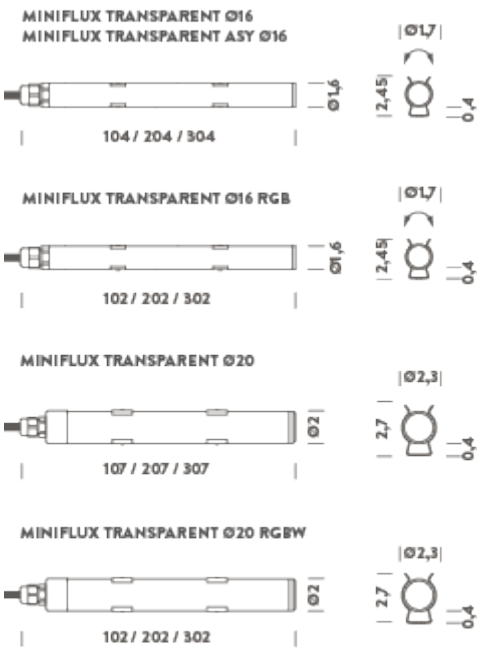

Ø2CM | 1M - 4000K

LAMPING

Source	LED strip
Total power	20W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes
BBOK0910015NPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

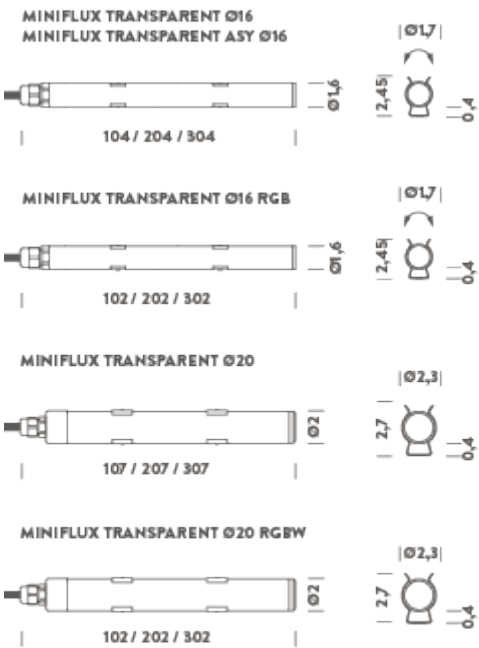

Ø2CM | 2M - 3000K

LAMPING

Source	LED strip
Total power	40W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920015WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

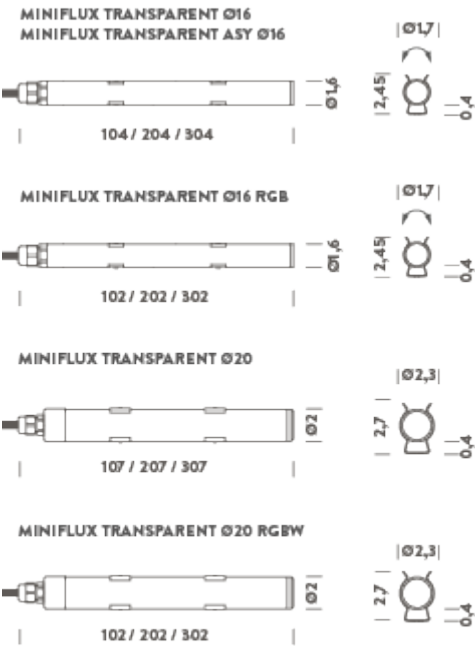

Ø2CM | 2M - 4000K

LAMPING

Source	LED strip
Total power	40W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920015NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

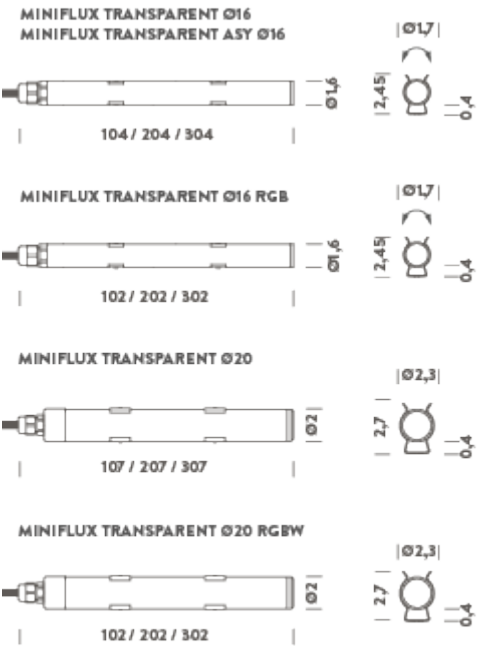

Ø2CM | 3M - 3000K

LAMPING

Source	LED strip
Total power	60W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes
BBOK0930015WPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 320x8,5x4 cm / Gross weight: 0,73 kg

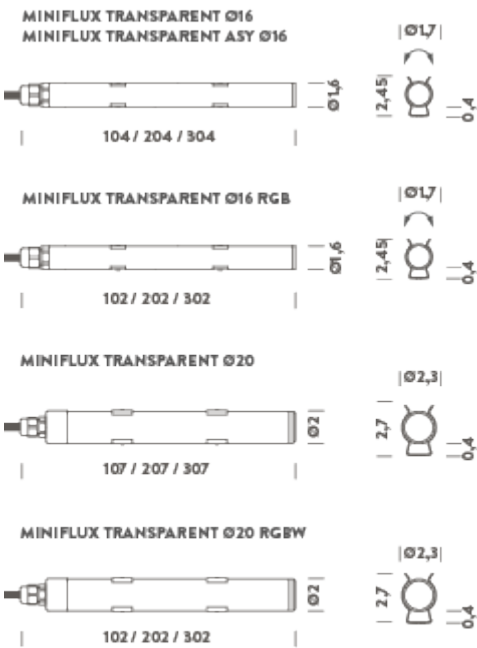

Ø2CM | 3M - 4000K

LAMPING

Source	LED strip
Total power	60W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes
BBOK0930015NPC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 320x8,5x4 cm / Gross weight: 0,73 kg

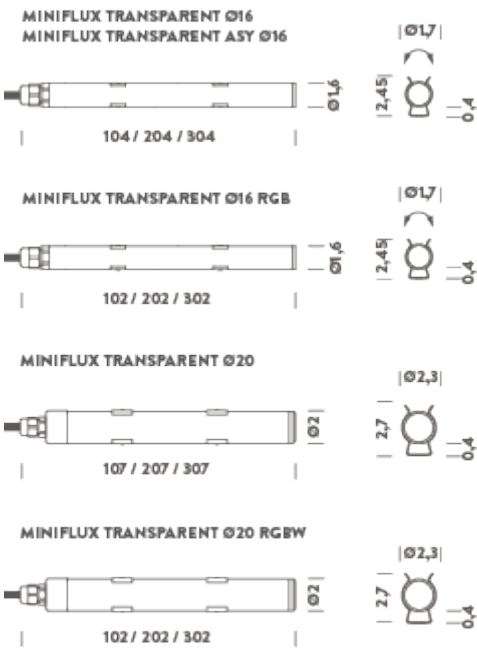

Ø1,6CM - RGB | 1M

LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGB
Typ CRI	90
IP class	65
Dimensions	ø1,6x102cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included cable length 2m
Customization options	tube length
Net lamp weight	0,32 kg

Codes

BBOK09100665PC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

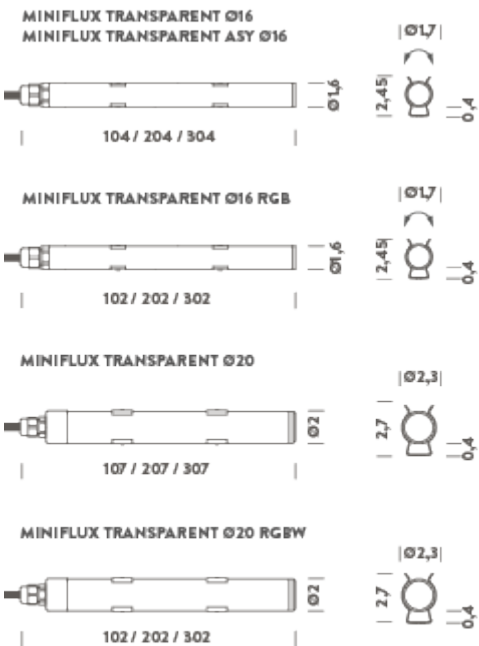

Ø1,6CM - RGB | 2M

LAMPING

Source	LED strip
Total power	30W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGB
Typ CRI	90
IP class	65
Dimensions	ø1,6x202cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included cable length 2m
Customization options	tube length
Net lamp weight	0,5 kg

Codes

BBOK09200665PC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x8 cm / Gross weight: 0,5 kg

Certificazioni

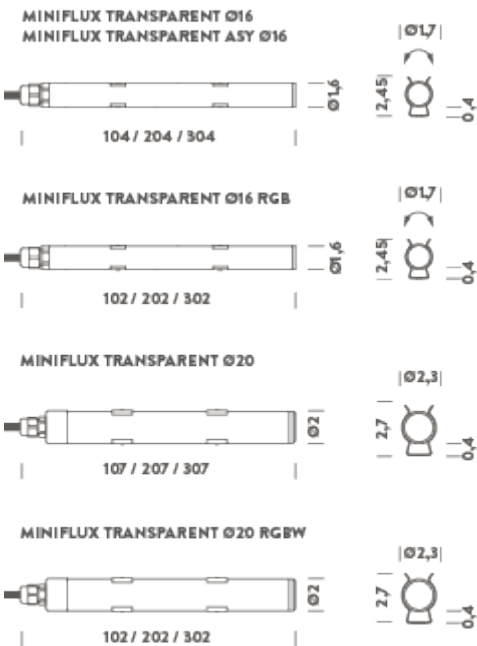

Ø1,6CM - RGB | 3M

LAMPING

Source	LED strip
Total power	45W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGB
Typ CRI	90
IP class	65
Dimensions	ø1,6x302cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included cable length 2m
Customization options	tube length
Net lamp weight	0,72 kg

Codes
BBOK09300665PC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

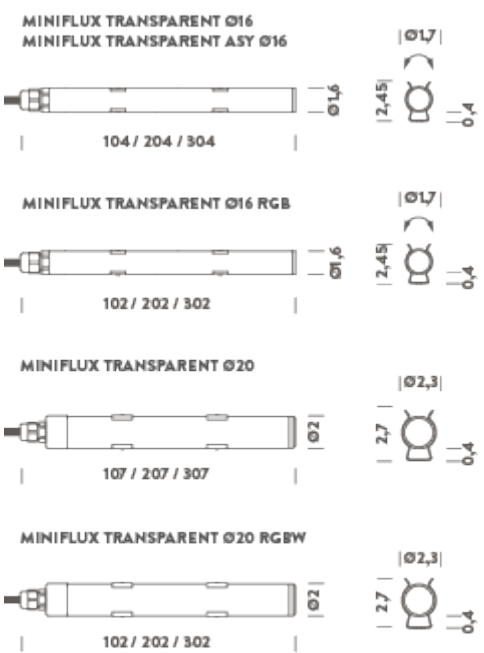

Ø2CM - RGBW | 1M

LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGBW
Typ CRI	90
IP class	65
Dimensions	ø2x102cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included cable length 2m
Customization options	tube length
Net lamp weight	0,32 kg

Codes

BBOK09100728PC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

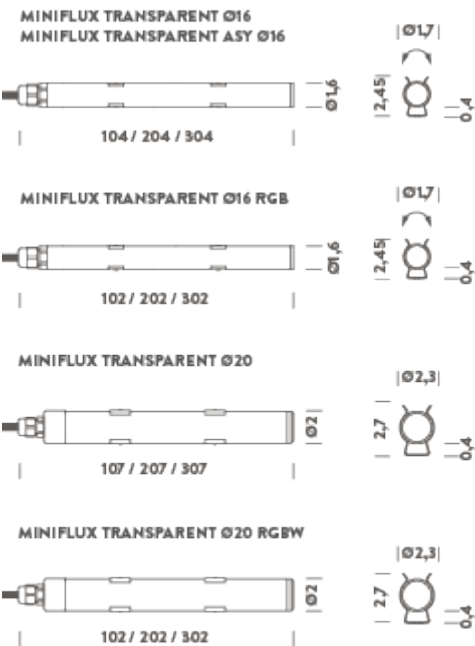

Ø2CM - RGBW | 2M

LAMPING

Source	LED strip
Total power	30W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGBW
Typ CRI	90
IP class	65
Dimensions	ø2x202cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	tube length
Net lamp weight	0,5 kg

Codes
BBOK09200728PC


PACKAGE
Package 01

Certificazioni



Structure
transparent

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

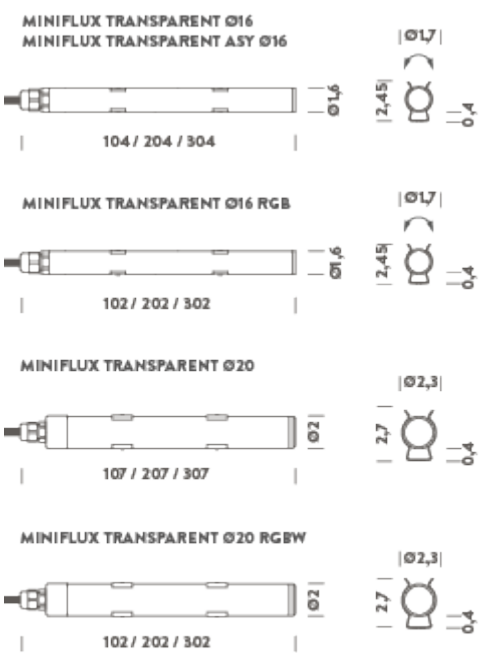

Ø2CM - RGBW | 3M

LAMPING

Source	LED strip
Total power	45W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGBW
Typ CRI	90
IP class	65
Dimensions	ø2x302cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	tube length
Net lamp weight	0,72 kg

Codes

BBOK09300728PC

Structure

transparent

PACKAGE

Package 01

Dimension: 320,8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

