

WALKLINE

WALKLINE ist ein begehbares, lineares LED-System für den Außenbereich,

bestehend aus einem natürlich eloxierten Aluminiumprofil mit einer opalen Harzversieglung für eine homogene Lichtemission.

Die Walkline ist in verschiedenen Längen erhältlich.

Dimmbar 1-10V, DALI oder DMX.

Einbaubox für Boden mit Wandeinbaubox (im Lieferumfang enthalten).



0,50M | 4000K

LAMPING

Source	LED strip
Total power	7,5W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	325lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	50,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,75 kg

Codes

BWLK0205G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 52x3x9 cm / Gross weight: 1,75 kg

Certificazioni

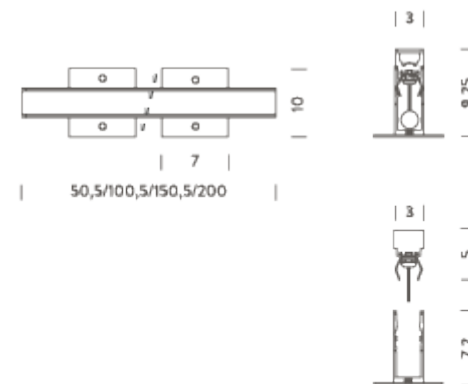

0,50M | 6000K

LAMPING

Source	LED strip
Total power	7,5W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	6000K
Luminous flux	325lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	50,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,75 kg


Codes

BWLK0205G260AA

PACKAGE

Package 01

Certificazioni

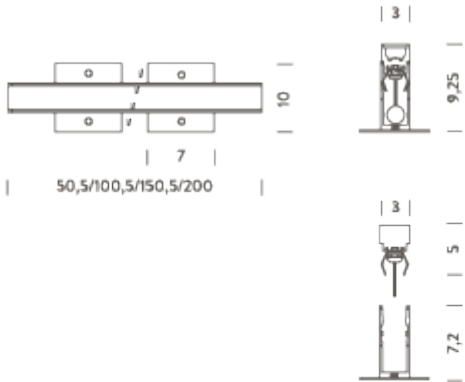

Structure

grey

Dimension: 52x3x9 cm / Gross weight: 1,75 kg

1M | 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	650lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	100,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,5 kg

Codes

BWLK0210G26NAA


Structure

grey

PACKAGE

Package 01 Dimension: 103x3x9 cm / Gross weight: 3,5 kg

Certificazioni

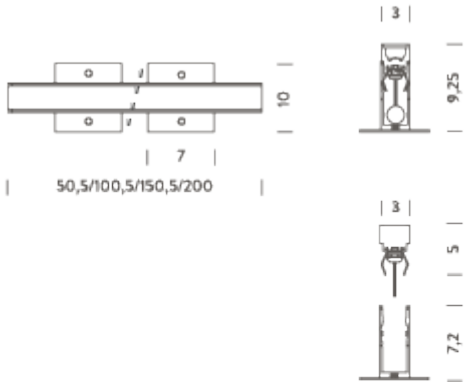

1M | 6000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	6000K
Luminous flux	650lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	100,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20° / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,5 kg

Codes

BWLK0210G260AA

Structure


grey

PACKAGE

Package 01

Dimension: 103x3x9 cm / Gross weight: 3,5 kg

Certificazioni

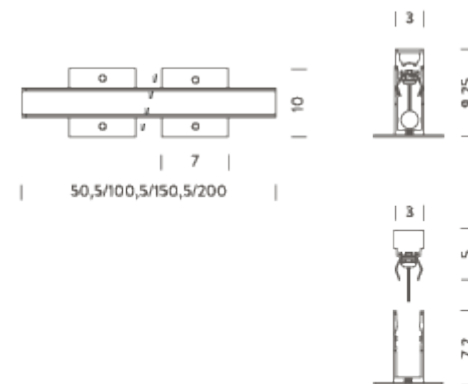

1,5M | 4000K

LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	975lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	150,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	5,25 kg

Codes

BWLK0215G26NAA


Structure

grey

PACKAGE

Package 01 Dimension: 152x3x9 cm / Gross weight: 5,25 kg

Certificazioni

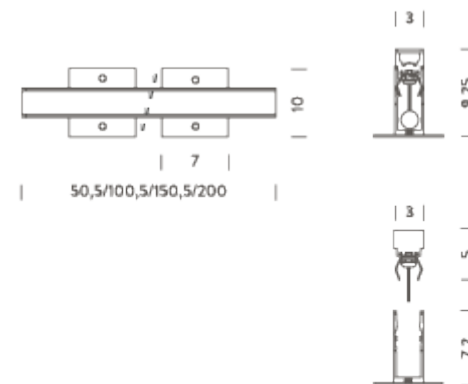

1,5M | 6000K

LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	6000K
Luminous flux	975lm
Initial luminaire efficacy	430lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	150,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20° / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	5,25 kg

Codes

BWLK0215G260AA

Structure


grey

PACKAGE

Package 01

Dimension: 152x3x9 cm / Gross weight: 5,25 kg

Certificazioni

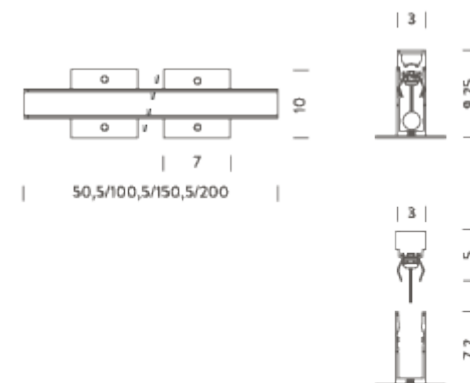

2M | 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1300lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	200x3x9,25cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	7 kg

Codes

BWLK0220G26NAA


Structure

grey

PACKAGE

Package 01 Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

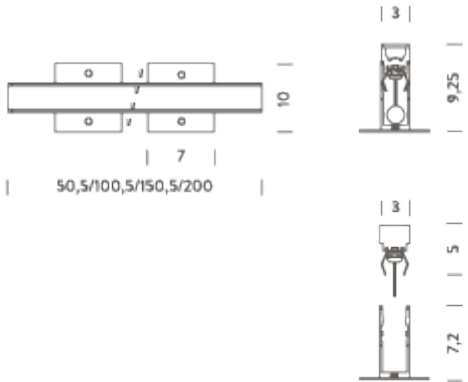

2M | 6000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	6000K
Luminous flux	1300lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	200x3x9,25cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	7 kg

Codes

BWLK0220G260AA

Structure

grey

PACKAGE

Package 01 Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

