

RIGA TRANSPARENT

Die RIGA-Familie umfasst flexible LED-Streifen für den Außenbereich, die sich besonders für eine dekorative Beleuchtung eignen.

Riga besteht aus einem 24V LED-Brand in einem weißen PVC-Profil, mit transparentem Polyurethanharz versiegelt, witterungsbeständig und mit einem hervorragendem Schutz gegen UV-Strahlen.

Bei der Riga mit transparentem Polyurethanharz wird das Licht von vorne ausgestrahlt.

Riga ist in unterschiedlichen Standardlängen lieferbar.

Die Installation kann mit Halterungen (im Lieferumfang enthalten) erfolgen.



1M | 2700K

LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1650lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,22 kg


Codes

MRIG0910035DRE

PACKAGE

Package 01

Certificazioni

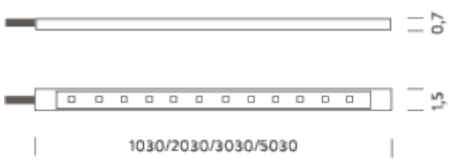

BRACKETS (included)



Structure

white

Dimension: 22x19x8 cm / Gross weight: 0,55 kg

2M | 2700K

LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	3300lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,48 kg

Codes

MRIG0920035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 22x19x4,5 cm / Gross weight: 0,81 kg

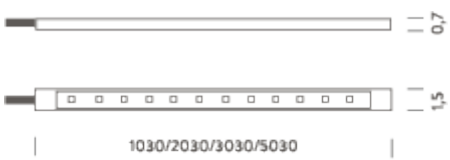

BRACKETS (included)



3M | 2700K

LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4950lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x300cm
Materials	esin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

MRIG0930035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 0,84 kg

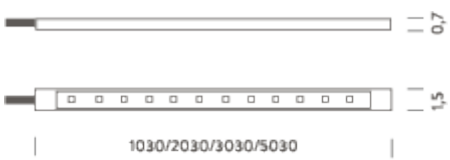

BRACKETS (included)



4M | 2700K

LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	6600lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,96 kg

Codes

MRIG0940035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,08 kg

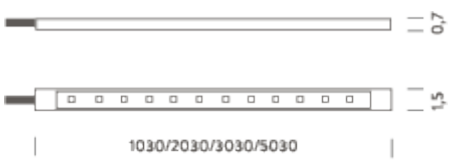

BRACKETS (included)



5M | 2700K

LAMPING

Source	Flexible LED strip
Total power	48W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	8250lm
Initial luminaire efficacy	146lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x0,7x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	1,2 kg

Codes

MRIG0950035DRE

PACKAGE

Package 01


Certificazioni



Structure

white

Dimension: 42x42x4,5 cm / Gross weight: 1,32 kg

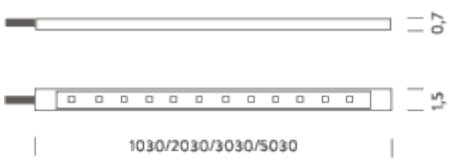

BRACKETS (included)

