

# RIGA OPAL

Die RIGA-Familie umfasst flexible LED-Streifen für den Außenbereich, die sich besonders für eine dekorative Beleuchtung eignen.

Riga besteht aus einem 24V LED-Band in einem weißen PVC-Profil, mit opalem Polyurethanharz versiegelt, witterungsbeständig und mit einem hervorragendem Schutz gegen UV-Strahlen.

Riga mit opalem Polyurethanharz ermöglicht je nach Kurvenmöglichkeit des LED-Streifens Front- oder Seitenlicht.

Riga ist in unterschiedlichen Standardlängen lieferbar.

Die Installation kann mit Halterungen (im Lieferumfang enthalten) erfolgen.



# 1M | 3000K - FRONT LIGHT

## LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

## Codes

MRIG0910G35WFL


## Structure

white

## PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

## Certificazioni

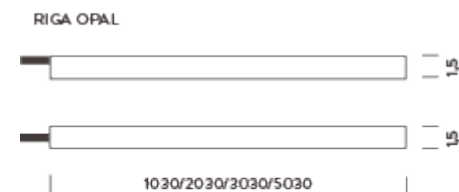

## BRACKETS (included)



# 1M | 3000K - SIDE LIGHT

## LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

## Codes

MRIG0910G35WSL


## Structure

white

## PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

## Certificazioni

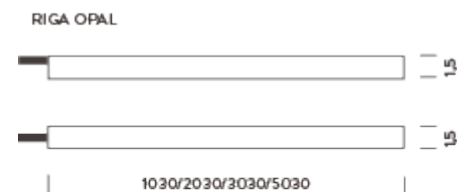

## BRACKETS (included)



# 1M | 4000K - FRONT LIGHT

## LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

## Codes

MRIG0910G35NFL


## Structure

white

## PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

## Certificazioni

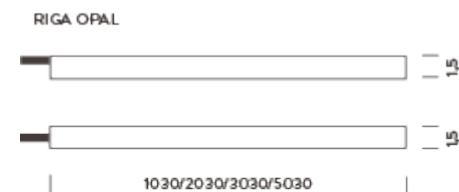

## BRACKETS (included)



# 1M | 4000K - SIDE LIGHT

## LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

## Codes

MRIG0910G35NSL


## Structure

white

## PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

## Certificazioni

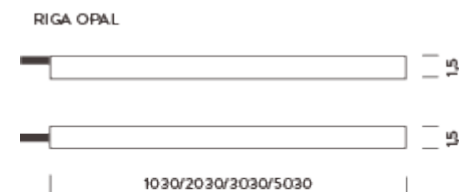

## BRACKETS (included)



## 2M | 3000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

### Codes

MRIG0920G35WFL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

### Certificazioni

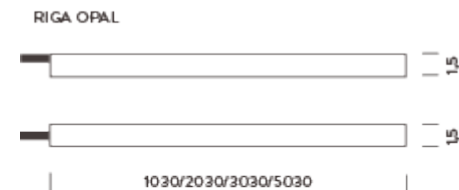

### BRACKETS (included)



## 2M | 3000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

### Codes

MRIG0920G35WSL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

### Certificazioni

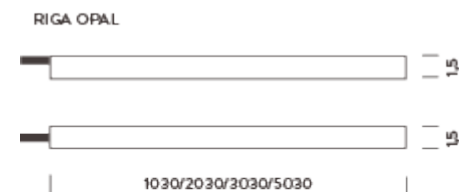

### BRACKETS (included)



## 2M | 4000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

### Codes

MRIG0920G35NFL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

### Certificazioni

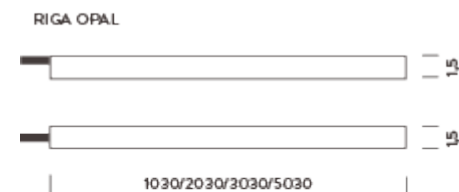

### BRACKETS (included)





## 2M | 4000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

### Codes

MRIG0920G35NSL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

### Certificazioni

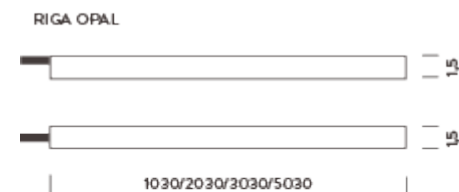

### BRACKETS (included)



## 3M | 3000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

### Codes

MRIG0930G35WFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

### Certificazioni

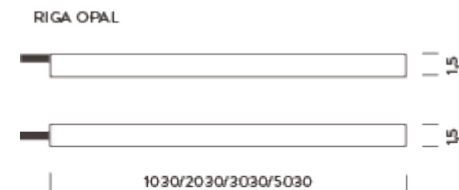

### BRACKETS (included)



## 3M | 3000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

### Codes

MRIG0930G35WSL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

### Certificazioni

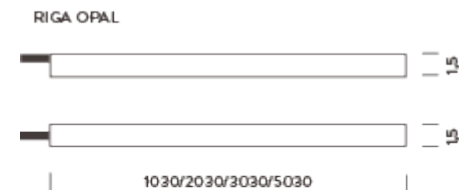

### BRACKETS (included)



## 3M | 4000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

### Codes

MRIG0930G35NFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

### Certificazioni

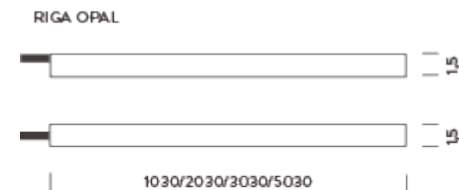

### BRACKETS (included)



## 3M | 4000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

### Codes

MRIG0930G35NSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

### Certificazioni

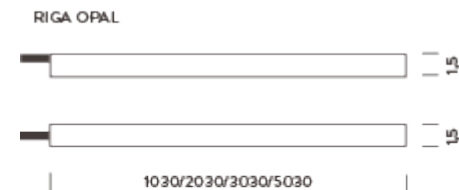

### BRACKETS (included)



## 4M | 3000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

### Codes

MRIG0940G35WFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

### Certificazioni

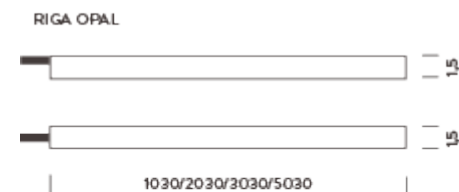

### BRACKETS (included)



## 4M | 3000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

### Codes

MRIG0940G35WSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

### Certificazioni

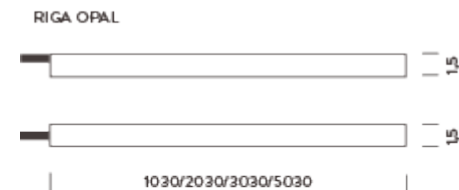

### BRACKETS (included)



## 4M | 4000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

### Codes

MRIG0940G35NFL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

### Certificazioni

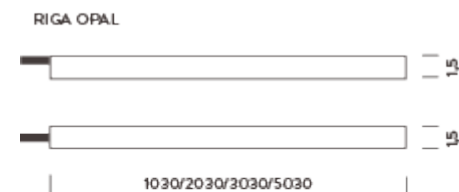

### BRACKETS (included)





## 4M | 4000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

### Codes

MRIG0940G35NSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

### Certificazioni

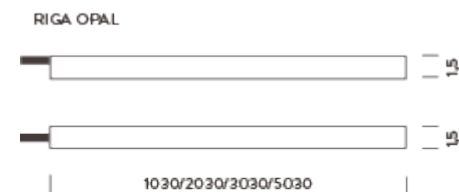

### BRACKETS (included)



## 5M | 3000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

### Codes

MRIG0950G35WFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

### Certificazioni

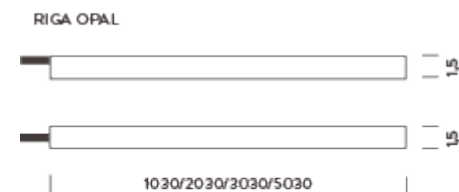

### BRACKETS (included)



## 5M | 3000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

### Codes

MRIG0950G35WSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

### Certificazioni

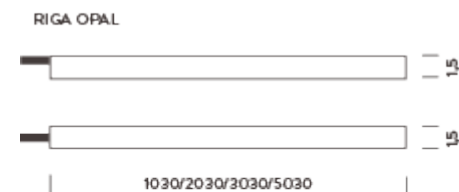

### BRACKETS (included)



## 5M | 4000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

### Codes

MRIG0950G35NFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

### Certificazioni

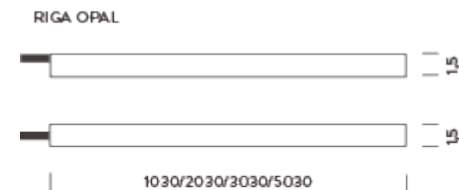

### BRACKETS (included)



## 5M | 4000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

### Codes

MRIG0950G35NSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

### Certificazioni

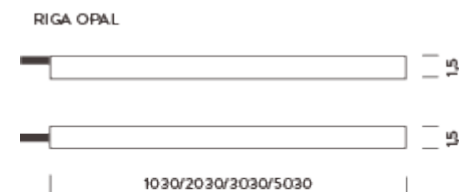

### BRACKETS (included)

