

SHARP FRAME

SHARP FRAME ist ein LED Projektor mit Rahmenoptik für die Akzentbeleuchtung in Innenräumen. Durch die seitlichen Lamellen kann der Lichtstrahl je nach Projektbedarf angepasst werden.

FRAME besteht aus einem Aluminiumgehäuse mit einem Kunststoffschienenadapter. Weiß lackiert (mit grauen Details) oder schwarz eloxiertes Aluminium. Wird mit integriertem Dimmer und integriertem Netzteil geliefert und ist in drei Lichtfarben erhältlich.



1-10V | 2700K

LAMPING

Source	LED spot
Total power	23W
Emission	direct adjustable
Switching	dimmable 1-10V on board
Tension	220/240V
Color temperature	2700K
Luminous flux	870lm
Initial luminaire efficacy	38lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
IP class	20
Dimensions	29,2x31,8x9cm
Materials	aluminum + polycarbonate
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, CCT, Casambi
Net lamp weight	1,85 kg

Codes

MPFB8001C29DBG
MPFB8001C29DAN

Structure


white
black

PACKAGE

Package 01

Dimension: 32x30,5x12,5 cm / Gross weight: 2,15 kg

Certificazioni

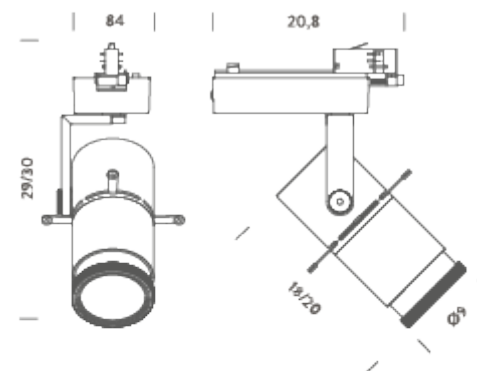

1-10V | 3000K

LAMPING

Source	LED spot
Total power	23W
Emission	direct adjustable
Switching	dimnable 1-10V on board
Tension	220/240V
Color temperature	3000K
Luminous flux	920lm
Initial luminaire efficacy	40lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
IP class	20
Dimensions	29,2x31,8x9cm
Materials	aluminum + polycarbonate
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, CCT, Casambi
Net lamp weight	1,85 kg

Codes

MPFB8001C29WBG
MPFB8001C29WAN

Structure


white
black

PACKAGE

Package 01

Dimension: 32x30,5x12,5 cm / Gross weight: 2,15 kg

Certificazioni

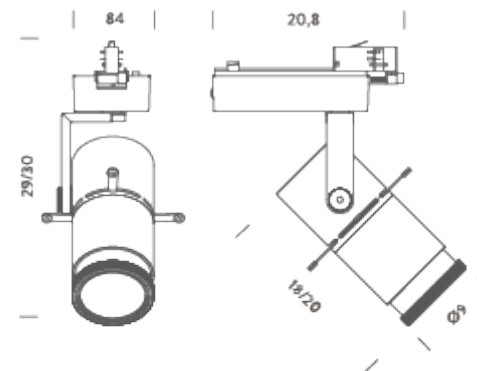

1-10V | 4000K

LAMPING

Source	LED spot
Total power	23W
Emission	direct adjustable
Switching	dimnable 1-10V on board
Tension	220/240V
Color temperature	4000K
Luminous flux	1070lm
Initial luminaire efficacy	47lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
IP class	20
Dimensions	29,2x31,8x9cm
Materials	aluminum + polycarbonate
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, CCT, Casambi
Net lamp weight	1,85 kg

Codes

MPFB8001C29NBG
MPFB8001C29NAN

Structure


white
black

PACKAGE

Package 01

Dimension: 32x30,5x12,5 cm / Gross weight: 2,15 kg

Certificazioni

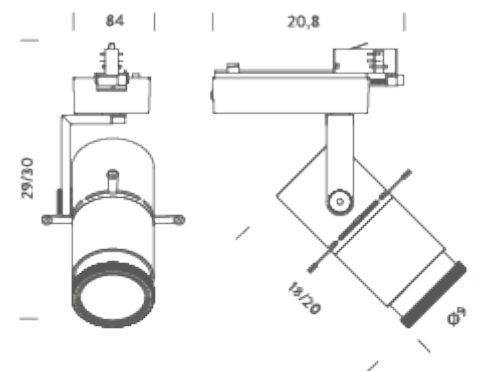

DALI | 2700K

LAMPING

Source	LED spot
Total power	23W
Emission	direct adjustable
Switching	DALI
Tension	220/240V
Color temperature	2700K
Luminous flux	870lm
Initial luminaire efficacy	38lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
IP class	20
Dimensions	29,2x31,8x9cm
Materials	aluminum + polycarbonate
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, CCT, Casambi
Net lamp weight	1,85 kg

Codes

MPFBDA01C29DBG
MPFBDA01C29DAN

Structure


white
black

PACKAGE

Package 01

Dimension: 32x30,5x12,5 cm / Gross weight: 2,15 kg

Certificazioni

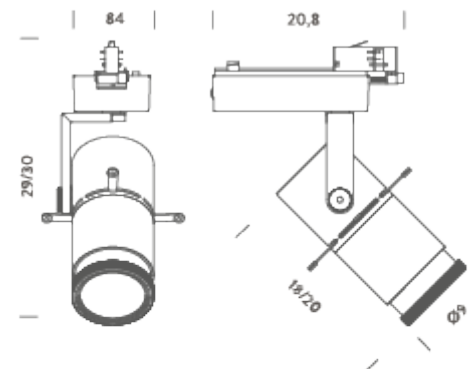

DALI | 3000K

LAMPING

Source	LED spot
Total power	23W
Emission	direct adjustable
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	920lm
Initial luminaire efficacy	40lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
IP class	20
Dimensions	29,2x31,8x9cm
Materials	aluminum + polycarbonate
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, CCT, Casambi
Net lamp weight	1,85 kg

Codes

MPFBDA01C29WBG
MPFBDA01C29WAN

Structure


white
black

PACKAGE

Package 01

Dimension: 32x30,5x12,5 cm / Gross weight: 2,15 kg

Certificazioni

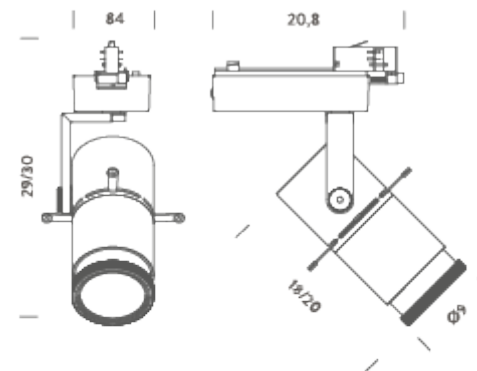

DALI | 4000K

LAMPING

Source	LED spot
Total power	23W
Emission	direct adjustable
Switching	DALI
Tension	220/240V
Color temperature	4000K
Luminous flux	1070lm
Initial luminaire efficacy	47lm/W
Initial chromaticity	SDCM < 2
Typ CRI	> 94
IP class	20
Dimensions	29,2x31,8x9cm
Materials	aluminum + polycarbonate
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	track connector 3C
Customization options	CRI, CCT, Casambi
Net lamp weight	1,85 kg

Codes

MPFBDA01C29NBG
MPFBDA01C29NAN

Structure

white
black

PACKAGE

Package 01

Dimension: 32x30,5x12,5 cm / Gross weight: 2,15 kg

Certificazioni

