

# CAPRI CEILING

Famille de spots d'intérieur pour éclairage d'accentuation. L'appareil peut être orienté à 90° verticalement et à 355° horizontalement. L'excellente structure de la dissipation thermique et l'alimentation intégrée sont parfaitement combinées ensemble. Le design intégré rend l'aspect plus compact et minimal. L'angle du faisceau réglable permet de satisfaire toutes les exigences de l'éclairage.



## DIMMABLE TRIAC | 2700K

### LAMPING

|                                   |                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                        |
| Total power                       | 23W                                                                               |
| Emission                          | direct adjustable 15°-55°                                                         |
| Switching                         | dimmable TRIAC                                                                    |
| Tension                           | 220/240V                                                                          |
| Color temperature                 | 2700K                                                                             |
| Luminous flux                     | 1600lm                                                                            |
| Initial luminaire efficacy        | 70lm/w                                                                            |
| Initial chromaticity              | SDCM<3                                                                            |
| Typ CRI                           | 90                                                                                |
| IP class                          | 20                                                                                |
| Dimensions                        | ø7,3x20cm                                                                         |
| Ambient temperature range         | 0°C / +35°C                                                                       |
| Performance ambient temperature   | 25°C                                                                              |
| Mechanical impact protection code | IK02                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90° |
| Net lamp weight                   | 1 kg                                                                              |

### Codes

CAP LW2 41  
CAP LN2 41

### Structure


white  
black

### PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

### Certificazioni

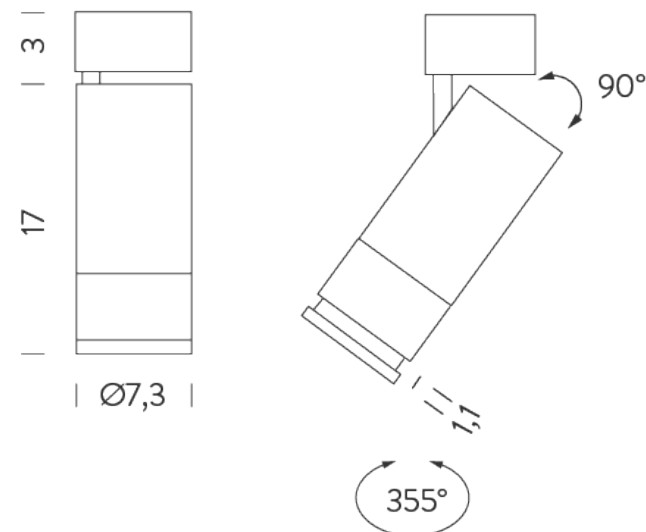

## DIMMABLE TRIAC | 3000K

### LAMPING

|                                   |                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                        |
| Total power                       | 23W                                                                               |
| Emission                          | direct adjustable 15°-55°                                                         |
| Switching                         | dimmable TRIAC                                                                    |
| Tension                           | 220/240V                                                                          |
| Color temperature                 | 3000K                                                                             |
| Luminous flux                     | 1780lm                                                                            |
| Initial luminaire efficacy        | 77lm/W                                                                            |
| Initial chromaticity              | SDCM<3                                                                            |
| Typ CRI                           | 90                                                                                |
| IP class                          | 20                                                                                |
| Dimensions                        | ø7,3x20cm                                                                         |
| Ambient temperature range         | 0°C / +35°C                                                                       |
| Performance ambient temperature   | 25°C                                                                              |
| Mechanical impact protection code | IK02                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90° |
| Net lamp weight                   | 1 kg                                                                              |

### Codes

CAP LW3 41  
CAP LN3 41

### Structure


white  
black

### PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

### Certificazioni

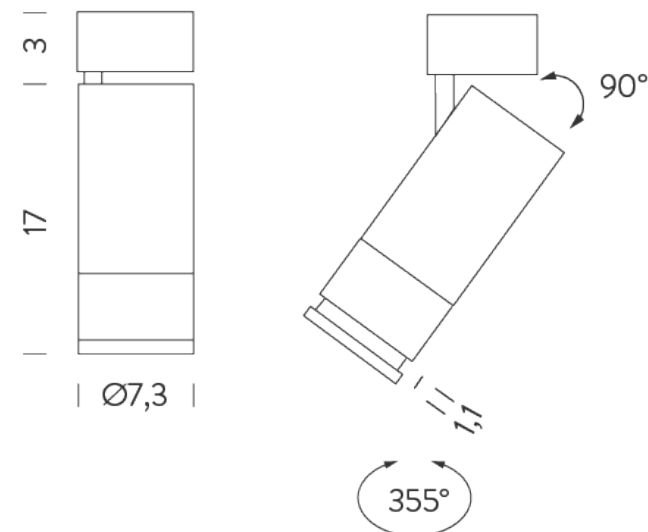

## DIMMABLE 0-10V | 2700K

### LAMPING

|                                   |                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                        |
| Total power                       | 23W                                                                               |
| Emission                          | direct adjustable 15°-55°                                                         |
| Switching                         | dimmable 0-10V                                                                    |
| Tension                           | 220/240V                                                                          |
| Color temperature                 | 2700K                                                                             |
| Luminous flux                     | 1600lm                                                                            |
| Initial luminaire efficacy        | 70lm/W                                                                            |
| Initial chromaticity              | SDCM<3                                                                            |
| Typ CRI                           | 90                                                                                |
| IP class                          | 20                                                                                |
| Dimensions                        | ø7,3x20cm                                                                         |
| Ambient temperature range         | 0°C / +35°C                                                                       |
| Performance ambient temperature   | 25°C                                                                              |
| Mechanical impact protection code | IK02                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90° |
| Net lamp weight                   | 1 kg                                                                              |

### Codes

CAP LW2 42  
CAP LN2 42

### Structure


white  
black

### PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

### Certificazioni

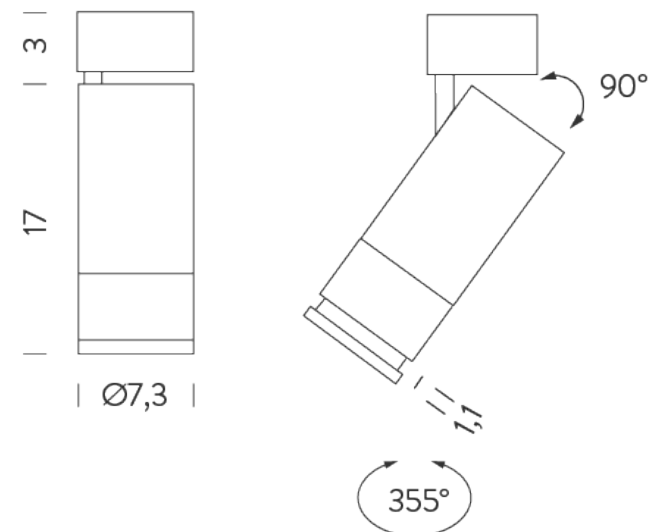

## DIMMABLE 0-10V | 3000K

### LAMPING

|                                   |                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                        |
| Total power                       | 23W                                                                               |
| Emission                          | direct adjustable 15°-55°                                                         |
| Switching                         | dimnable 0-10V                                                                    |
| Tension                           | 220/240V                                                                          |
| Color temperature                 | 3000K                                                                             |
| Luminous flux                     | 1780lm                                                                            |
| Initial luminaire efficacy        | 77lm/W                                                                            |
| Initial chromaticity              | SDCM<3                                                                            |
| Typ CRI                           | 90                                                                                |
| IP class                          | 20                                                                                |
| Dimensions                        | ø7,3x20cm                                                                         |
| Ambient temperature range         | 0°C / +35°C                                                                       |
| Performance ambient temperature   | 25°C                                                                              |
| Mechanical impact protection code | IK02                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90° |
| Net lamp weight                   | 1 kg                                                                              |

### Codes

CAP LW3 42  
CAP LN3 42

### Structure


white  
black

### PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

### Certificazioni

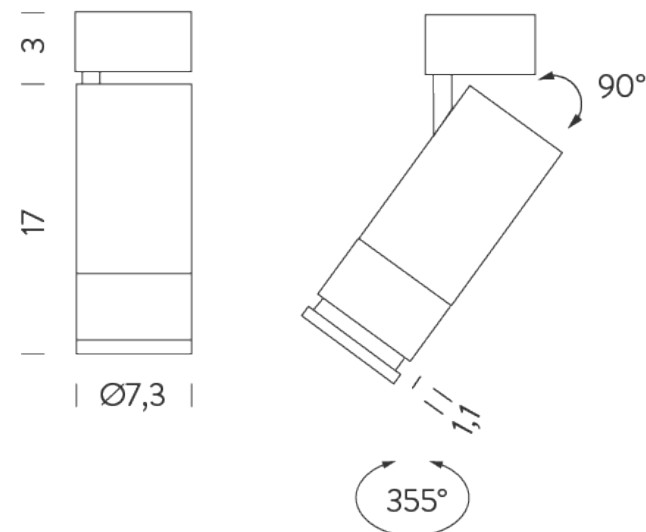

## DIMMABLE DALI | 2700K

### LAMPING

|                                   |                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                        |
| Total power                       | 23W                                                                               |
| Emission                          | direct adjustable 15°-55°                                                         |
| Switching                         | dimmable DALI                                                                     |
| Tension                           | 220/240V                                                                          |
| Color temperature                 | 2700K                                                                             |
| Luminous flux                     | 1600lm                                                                            |
| Initial luminaire efficacy        | 70lm/W                                                                            |
| Initial chromaticity              | SDCM<3                                                                            |
| Typ CRI                           | 90                                                                                |
| IP class                          | 20                                                                                |
| Dimensions                        | ø7,3x20cm                                                                         |
| Ambient temperature range         | 0°C / +35°C                                                                       |
| Performance ambient temperature   | 25°C                                                                              |
| Mechanical impact protection code | IK02                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90° |
| Net lamp weight                   | 1 kg                                                                              |

### Codes

CAP LW2 43  
CAP LN2 43

### Structure


white  
black

### PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

### Certificazioni

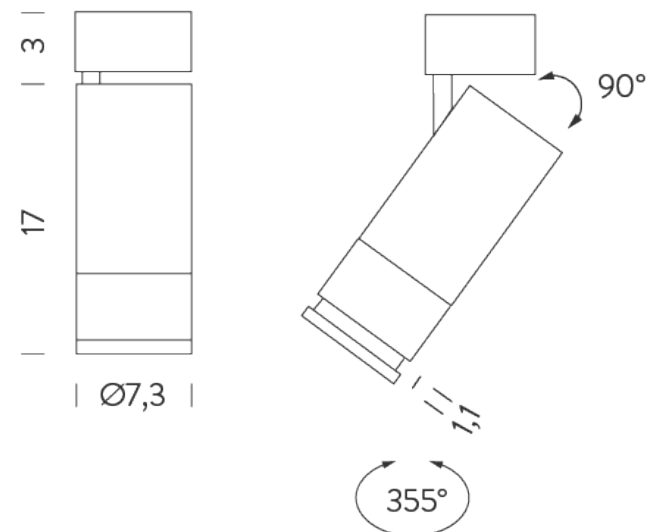

## DIMMABLE DALI | 3000K

### LAMPING

|                                   |                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                        |
| Total power                       | 23W                                                                               |
| Emission                          | direct adjustable 15°-55°                                                         |
| Switching                         | dimmable DALI                                                                     |
| Tension                           | 220/240V                                                                          |
| Color temperature                 | 3000K                                                                             |
| Luminous flux                     | 1780lm                                                                            |
| Initial luminaire efficacy        | 77lm/W                                                                            |
| Initial chromaticity              | SDCM<3                                                                            |
| Typ CRI                           | 90                                                                                |
| IP class                          | 20                                                                                |
| Dimensions                        | ø7,3x20cm                                                                         |
| Ambient temperature range         | 0°C / +35°C                                                                       |
| Performance ambient temperature   | 25°C                                                                              |
| Mechanical impact protection code | IK02                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90° |
| Net lamp weight                   | 1 kg                                                                              |

### Codes

CAP LW3 43  
CAP LN3 43

### Structure


white  
black

### PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

### Certificazioni

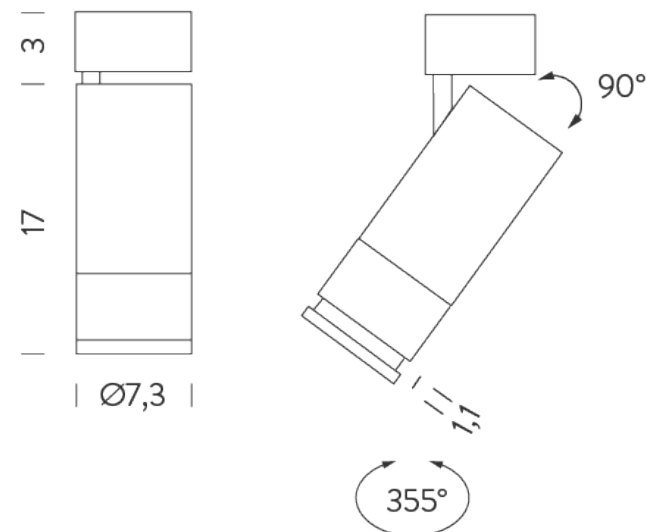

# CASAMBI (BLUETOOTH) | 2700K

## LAMPING

|                                   |                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                        |
| Total power                       | 23W                                                                               |
| Emission                          | direct adjustable 15°-55°                                                         |
| Switching                         | CASAMBI (bluetooth)                                                               |
| Tension                           | 220/240V                                                                          |
| Color temperature                 | 2700K                                                                             |
| Luminous flux                     | 1600lm                                                                            |
| Initial luminaire efficacy        | 70lm/W                                                                            |
| Initial chromaticity              | SDCM<3                                                                            |
| Typ CRI                           | 90                                                                                |
| IP class                          | 20                                                                                |
| Dimensions                        | ø7,3x20cm                                                                         |
| Ambient temperature range         | 0°C / +35°C                                                                       |
| Performance ambient temperature   | 25°C                                                                              |
| Mechanical impact protection code | IK02                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90° |
| Net lamp weight                   | 1 kg                                                                              |

## Codes

CAP LN2 45  
CAP LW2 45


## Structure

black  
white

## PACKAGE

Package 01      Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

## Certificazioni

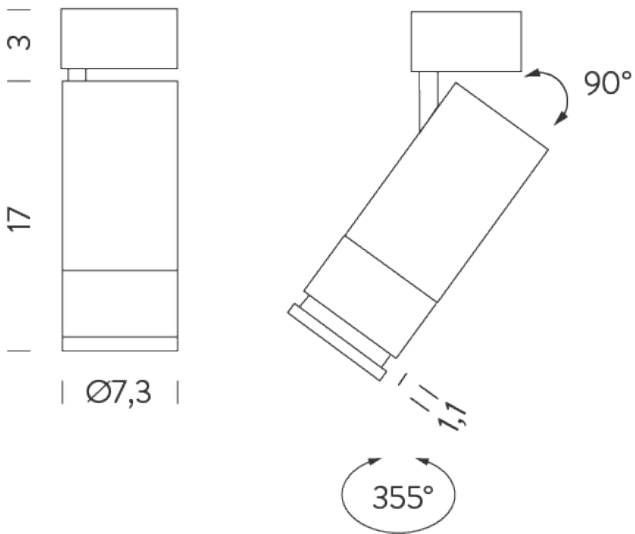



# CASAMBI (BLUETOOTH) | 3000K

## LAMPING

|                                   |                                                                                   |
|-----------------------------------|-----------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                        |
| Total power                       | 23W                                                                               |
| Emission                          | direct adjustable 15°-55°                                                         |
| Switching                         | CASAMBI (bluetooth)                                                               |
| Tension                           | 220/240V                                                                          |
| Color temperature                 | 3000K                                                                             |
| Luminous flux                     | 1780lm                                                                            |
| Initial luminaire efficacy        | 77lm/W                                                                            |
| Initial chromaticity              | SDCM<3                                                                            |
| Typ CRI                           | 90                                                                                |
| IP class                          | 20                                                                                |
| Dimensions                        | ø7,3x20cm                                                                         |
| Ambient temperature range         | 0°C / +35°C                                                                       |
| Performance ambient temperature   | 25°C                                                                              |
| Mechanical impact protection code | IK02                                                                              |
| Notes                             | driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90° |
| Net lamp weight                   | 1 kg                                                                              |

## Codes

CAP LN3 45  
CAP LW3 45

## Structure

black  
white

## PACKAGE

Package 01      Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

## Certificazioni

