


ZIRKOL LINEAR

Zirkol Linear ist eine Familie von linear Hängeleuchten, die sich ideal für die allgemeine und dekorative Beleuchtung von Räumen eignen.

Gehäuse aus eloxiertem Aluminium und Opalschutz für homogene Beleuchtung. CRI > 90

Direkte oder doppelte Lichtemission mit hohem Lichtstrom und mit drei verschiedenen Farbtemperaturen.

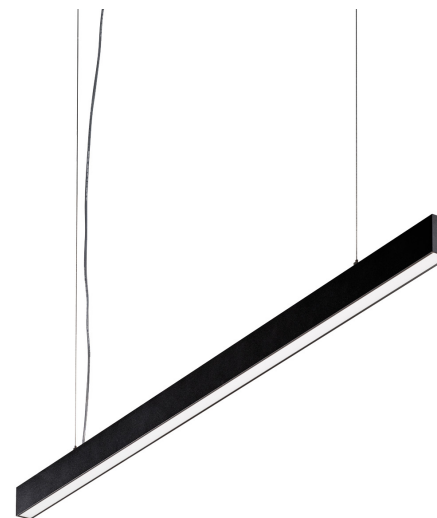

1M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	14,5W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	833lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1610G15DBO
BZRL1610G15DNE
BZRL1610G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | UP - DOWNLIGHT -2700K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1666lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1710G15DBO
BZRL1710G15DNE
BZRL1710G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	14,5W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	882lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1610G15WOB
BZRL1610G15WNE
BZRL1610G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | UP - DOWNLIGHT -3000K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	1764lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1710G15WBO
BZRL1710G15WNE
BZRL1710G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	14,5W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	980lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1610G15NBO
BZRL1610G15NNE
BZRL1610G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | UP - DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	1960lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	100x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	1,32 kg

Codes

BZRL1710G15NBO
BZRL1710G15NNE
BZRL1710G15NNE

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



2M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1666lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1620G15DBO
BZRL1620G15DNE
BZRL1620G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | UP - DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	58W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3332lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1720G15DBO
BZRL1720G15DNE
BZRL1720G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	1764lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1620G15WBO
BZRL1620G15WNE
BZRL1620G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | UP - DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	58W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	3528lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1720G15WBO
BZRL1720G15WNE
BZRL1720G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	29W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	1960lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1620G15NBO
BZRL1620G15NNE
BZRL1620G15NOR

Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | UP - DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	58W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3920lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	200x2,6x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	light configurations, separate light control, control systems
Accessories	Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling
Net lamp weight	2,69 kg

Codes

BZRL1720G15NBO
BZRL1720G15NNE
BZRL1720G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni

