

ZIRKOL LINEAR UGR

Die neue Lampe in der Kollektion, ZIRKOL LINEAR UGR ist mit einer speziellen optischen Gruppe ausgestattet, die eine direkte Emission mit einem reduzierten Blendungsindex (UGR < 19) ermöglicht. Struktur in Aluminium, erhältlich in zwei Ausführungen und Farbtemperaturen. Ausgestattet mit einem Baldachin und einem DALI-Steuerungssystem ist sie für Büros und Arbeitsplätze geplant, an denen ein hoher Sehkomfort erforderlich ist.



1,4M | DOWNLIGHT - 3000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
Energy class
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
45W
direct | UGR<19
DALI/PUSH
24V
3000K
3600lm
80lm/W
SDCM < 3
90
F
40
140x2,6x5
aluminium
0°C / +35°C
25°C
included: 1 x driver 60W DALI2 (220/240V) | 1
driver box (40x5x4,5) | 1 electrical cable length 3m
| 2 x adjustable metal cable length 3m (including
ceiling attachments) | remote driver | RAL 9005
black | RAL 9016 white
length | white reflectors
3,2 kg

Customization options
Net lamp weight

Codes

BZRL1614I42WBO
BZRL1614I42WNE

Structure



white
black

PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

Certificazioni

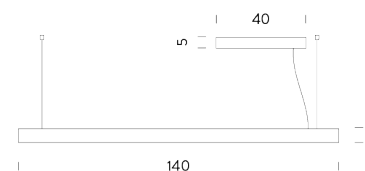

1,4M | DOWNLIGHT - 4000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
Energy class
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
45W
direct | UGR<19
DALI/PUSH
24V
4000K
3700lm
82lm/W
SDCM < 3
90
E
40
140x2,6x5
aluminium
0°C / +35°C
25°C
included: 1 x driver 60W DALI2 (220/240V) | 1
driver box (40x5x4,5) | 1 electrical cable length 3m
| 2 x adjustable metal cable length 3m (including
ceiling attachments) | remote driver | RAL 9005
black | RAL 9016 white
length | white reflectors
3,2 kg

Customization options
Net lamp weight

Codes

BZRL1614I42NBO
BZRL1614I42NNE

Structure


white
black

PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

Certificazioni



1,4M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	60W
Emission	direct UGR<19 - Indirect diffused
Switching	DALI/PUSH
Tension	24V
Color temperature	3000K
Luminous flux	4700lm
Initial luminaire efficacy	78lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	F
IP class	40
Dimensions	140x2,6x5
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W DALI2 (220/240V) 1 driver box (40x5x4,5) 1 electrical cable length 3m 2 x adjustable metal cable length 3m (including ceiling attachments) remote driver RAL 9005 black RAL 9016 white length white reflectors
Customization options	
Net lamp weight	3,2 kg

Codes

BZRL1714I49WBO

BZRL1714I49WNE

Structure

white


black

PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

Certificazioni



1,4M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	60W
Emission	direct UGR<19 - Indirect diffused
Switching	DALI/PUSH
Tension	24V
Color temperature	4000K
Luminous flux	4900lm
Initial luminaire efficacy	82lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	140x2,6x5
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 60W DALI2 (220/240V) 1 driver box (40x5x4,5) 1 electrical cable length 3m 2 x adjustable metal cable length 3m (including ceiling attachments) remote driver RAL 9005 black RAL 9016 white length white reflectors
Customization options	length white reflectors
Net lamp weight	3,2 kg

Codes

BZRL1714I49NBO

BZRL1714I49NNE

Structure

white

black

PACKAGE

Package 01

Dimension: 204x11x11 cm / Gross weight: 5 kg

Certificazioni

