

ZIRKOL CIRCLE WALL

Geeignet für indirekte und dekorative Beleuchtung. Zirkol Wall ist das neue Stück der Kollektion, mit runder Form und Wandbefestigung. Erhältlich mit schwarzer Oberfläche und drei verschiedene LED-Farbtemperaturen: 2700K, 3000K oder 4000K. Die Länge der mitgelieferten Stangen ermöglicht die Schaffung verschiedener Kompositionen mit mehreren Lampen für individuelle Umgebungsbeleuchtung.



Ø 1M | 2700K

LAMPING

Source	LED strip
Total power	45W
Emission	indirect diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2616lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

Net lamp weight

Codes

BZRC4210G15DNE

PACKAGE

Package 01

Certificazioni



included: 1 x driver 60W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission


external electrical cable | light configurations,
separate light control, control systems

4 kg

Structure

black

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

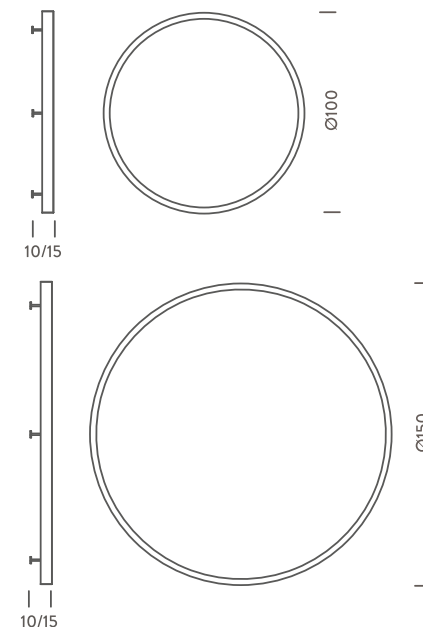

Ø 1M | 3000K

LAMPING

Source	LED strip
Total power	45W
Emission	indirect diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options

Net lamp weight

Codes

BZRC4210G15WNE

PACKAGE

Package 01

Certificazioni




included: 1 x driver 60W (110/240V) 1 x dimmer DALI 3 x tige 5 cm 3 x tige 11 cm 1 x electrical cable 50cm remote driver RAL 9005 black shipped assembled indirect light emission
external electrical cable light configurations, separate light control, control systems
4 kg

Structure

black

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

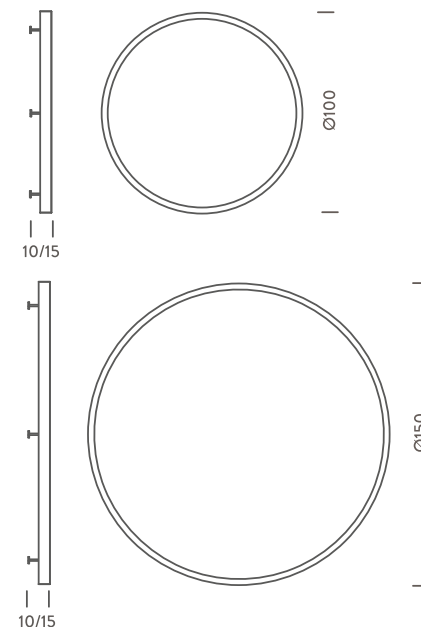

Ø 1M | 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	indirect diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3077lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	Ø100x5cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: 1 x driver 60W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Net lamp weight

4 kg

Codes

BZRC4210G15NNE

Structure


black

PACKAGE

Package 01

Dimension: 110x110x15 cm / Gross weight: 6,5 kg

Certificazioni

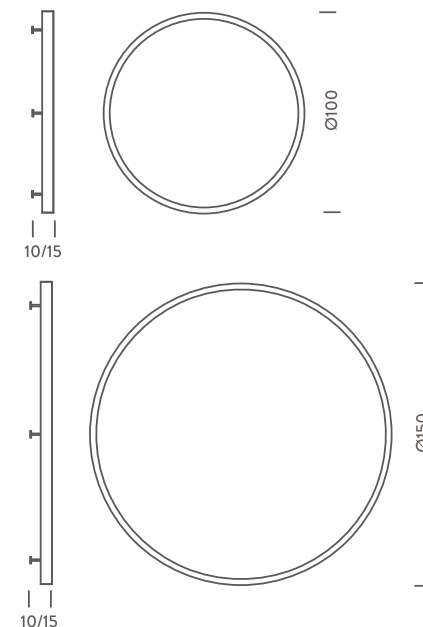

Ø 1,5M | 2700K

LAMPING

Source	LED strip
Total power	68W
Emission	indirect diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3923lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø150x5cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: 1 x driver 75W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Net lamp weight

4 kg

Codes

BZRC4215G15DNE

Structure


black

PACKAGE

Package 01

Dimension: 160x160x15 cm / Gross weight: 6,5 kg

Certificazioni

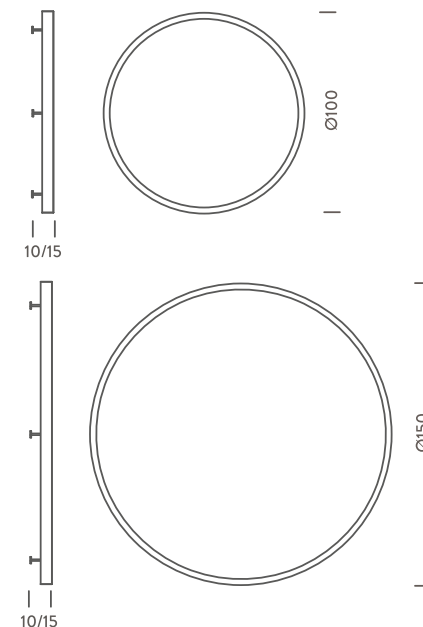

Ø 1,5M | 3000K

LAMPING

Source	LED strip
Total power	68W
Emission	indirect diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	4154lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø150x5cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: 1 x driver 75W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Net lamp weight

4 kg

Codes

BZRC4215G15WNE

Structure


black

PACKAGE

Package 01

Dimension: 160x160x15 cm / Gross weight: 6,5 kg

Certificazioni

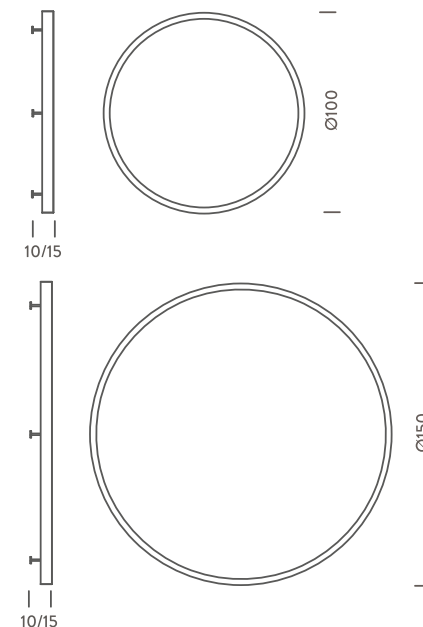

Ø 1,5M | 4000K

LAMPING

Source	LED strip
Total power	68W
Emission	indirect diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	4616lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø150x5cm
Materials	aluminum
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: 1 x driver 75W (110/240V) | 1 x dimmer
DALI | 3 x tige 5 cm | 3 x tige 11 cm | 1 x electrical
cable 50cm | remote driver | RAL 9005 black |
shipped assembled | indirect light emission

Customization options

external electrical cable | light configurations,
separate light control, control systems

Net lamp weight

4 kg

Codes

BZRC4215G15NNE

Structure

black

PACKAGE

Package 01

Dimension: 160x160x15 cm / Gross weight: 6,5 kg

Certificazioni

