


ZIRKOL ROUND

Die aus einem Teil der Leuchte Zirkol Circle hervorgegangene Zirkol Round ist der neue Halbkreis der Kollektion, der für die allgemeine und dekorative Raumbeleuchtung bestimmt ist. Gehäuse aus eloxiertem Aluminium und opaler Diffusor für homogenes Down- und Uplighting. Zirkol Round ist in den Farben Schwarz, Weiß und Mattgold sowie in den LED-Farbtemperaturen 2700K, 3000K und 4000K erhältlich. treiber und Dali-Schnittstelle im Lieferumfang enthalten.

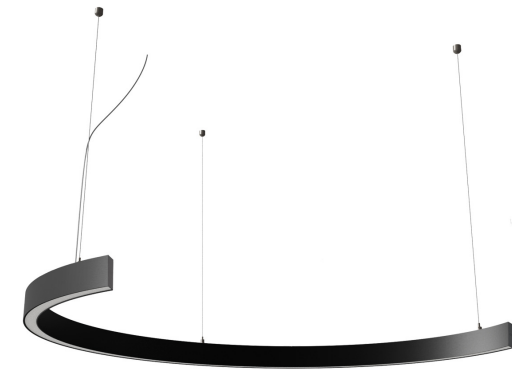

Ø1M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1308lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1610G15DBO
BZRR1610G15DNE
BZRR1610G15DOR

Structure

white
black
gold

Certificazioni



Ø1M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	1384lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1610G15WBO
BZRR1610G15WNE
BZRR1610G15WOR

Structure

white
black
gold

Certificazioni



Ø1M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	1538lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1610G15NBO
BZRR1610G15NNE
BZRR1610G15NOR

Structure

white
black
gold

Certificazioni



Ø1M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2615lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1710G15DBO
BZRR1710G15DNE
BZRR1710G15DOR

Structure

white
black
gold

Certificazioni



Ø1M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1710G15WBO
BZRR1710G15WNE
BZRR1710G15WOR

Structure

white
black
gold

Certificazioni



Ø1M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3077lm
Typ CRI	90
IP class	40
Dimensions	100x50x5cm
Materials	aluminium
Notes	included: included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1710G15NBO
BZRR1710G15NNE
BZRR1710G15NOR

Structure

white
black
gold

Certificazioni



Ø1,5M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	34W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	1961lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1615G15DBO
BZRR1615G15DNE
BZRR1615G15DOR

Structure

white
black
gold

Certificazioni



Ø1,5M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	34W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2077lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1615G15WBO
BZRR1615G15WNE
BZRR1615G15WOR

Structure

white
black
gold

Certificazioni



Ø1,5M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	34W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	34W
Luminous flux	2306lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1615G15NBO
BZRR1615G15NNE
BZRR1615G15NOR

Structure

white
black
matte gold

Certificazioni



Ø1,5M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3923lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1715G15DBO
BZRR1715G15DNE
BZRR1715G15DOR

Structure

white
black
gold

Certificazioni



Ø1,5M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	4154lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1715G15WBO
BZRR1715G15WNE
BZRR1715G15WOR

Structure

white
black
gold

Certificazioni



Ø1,5M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	68W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	4616lm
Typ CRI	90
IP class	40
Dimensions	150x50x5cm
Materials	aluminium
Notes	included: remote driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1715G15NBO
BZRR1715G15NNE
BZRR1715G15NOR

Structure

white
black
gold

Certificazioni



Ø2M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2630lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1620G15DBO
BZRR1620G15DNE
BZRR1620G15DOR

Structure

white
black
gold

Certificazioni



Ø2M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1620G15WBO
BZRR1620G15WNE
BZRR1620G15WOR

Structure

white
black
gold

Certificazioni



Ø2M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3077lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1620G15NBO
BZRR1620G15NNE
BZRR1620G15NOR

Structure

white
black
matte gold

Certificazioni



Ø2M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	90W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	5250lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1720G15DBO
BZRR1720G15DNE
BZRR1720G15DOR

Structure

white
black
gold

Certificazioni



Ø2M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	90W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	5539lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRR1720G15WBO
BZRR1720G15WNE
BZRR1720G15WOR

Structure

white
black
gold

Certificazioni



Ø2M | UP-DOWNLIGHT | 4000K

LAMPING

Source	LED strip
Total power	90W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	6154lm
Typ CRI	90
IP class	40
Dimensions	200x50x5cm
Materials	aluminium
Notes	included: remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems

Codes

BZRR1720G15NBO
BZRR1720G15NNE
BZRR1720G15NOR

Structure

white
black
gold

Certificazioni

