


ZIRKOL SQUARE-S

Zirkol Square-S ist eine quadratische Pendelleuchtenfamilie mit rechtem Winkel, ideal für die allgemeine und dekorative Raumbelichtung. Gehäuse aus eloxiertem Aluminium und opaler Abdeckung für eine gleichmäßige Ausleuchtung. CRI 90. Lichtaustritt kann direkt oder bidirektional sein, mit hohem Lichtstrom und verschiedenen Farbtemperaturen. Erhältlich in den Ausführungen Schwarz, Weiß und Mattgold.

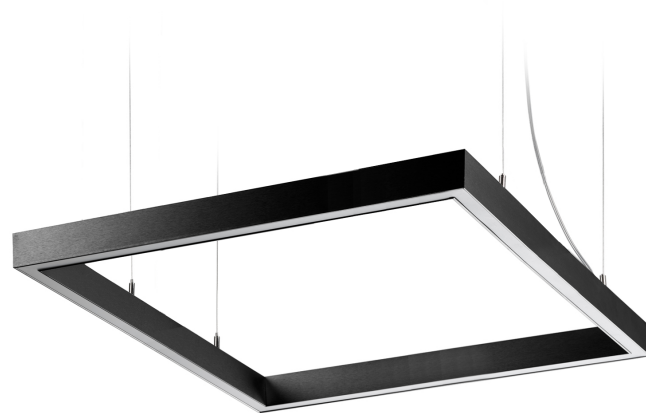

1M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	58W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3330lm
Typ CRI	90
IP class	40
Dimensions	100x100x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1610G15DBO
BZRA1610G15DNE
BZRA1610G15DOR

Structure

white
black
gold

Certificazioni

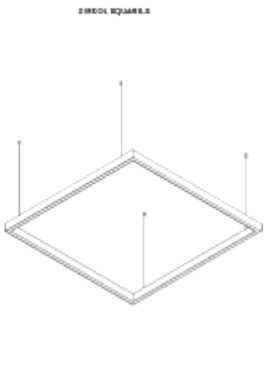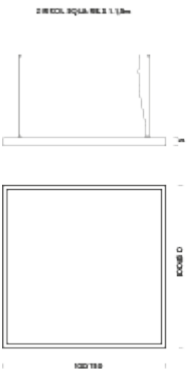

1M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	58W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	3525lm
Typ CRI	90
IP class	40
Dimensions	100x100x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1610G15WBO
BZRA1610G15WNE
BZRA1610G15WOR

Structure

white
black
gold

Certificazioni

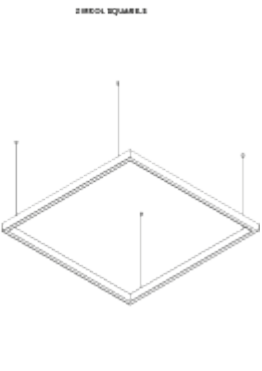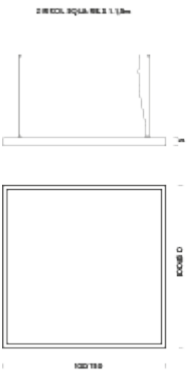

1M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	58W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3920lm
Typ CRI	90
IP class	40
Dimensions	100x100x5cm
Materials	aluminium
Notes	included: remote driver 60W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1610G15NBO
BZRA1610G15NNE
BZRA1610G15NOR

Structure

white
black
gold

Certificazioni

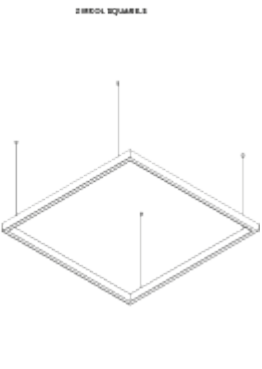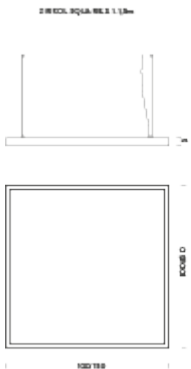

1M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	116W
Emission	diffused
Switching	DALI
Tension	24v
Color temperature	2700K
Luminous flux	6660lm
Typ CRI	90
IP class	40
Dimensions	100x100x5cm
Materials	aluminium
Notes	included: remote driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1710G15DBO
BZRA1710G15DNE
BZRA1710G15DOR

Structure

white
black
gold

Certificazioni

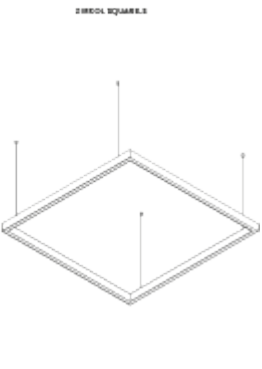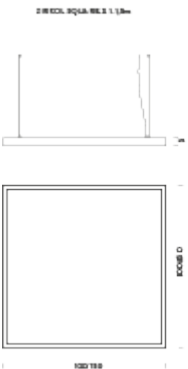

1M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	116W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	7050lm
Typ CRI	90
IP class	40
Dimensions	100x100x5cm
Materials	aluminium
Notes	included: remote driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1710G15WBO
BZRA1710G15WNE
BZRA1710G15WOR

Structure

white
black
gold

Certificazioni

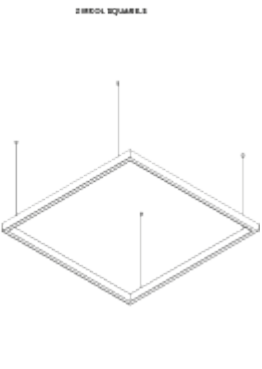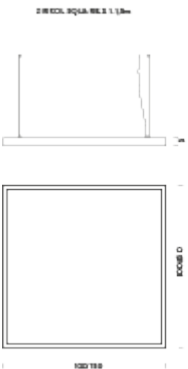

1M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	116W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	7840lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	aluminium
Notes	included: remote driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1710G15NBO
BZRA1710G15NNE
BZRA1710G15NOR

Structure

white
black
gold

Certificazioni

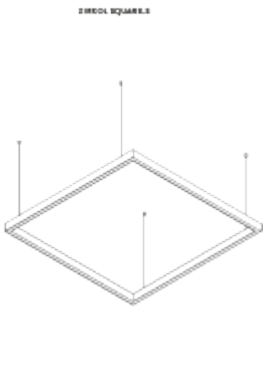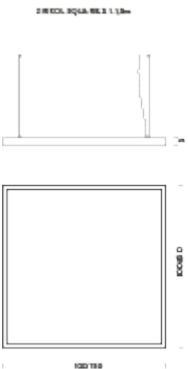

1,5M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	87W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	5000lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	aluminium
Notes	included: remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1615G15DBO
BZRA1615G15DNE
BZRA1615G15DOR

Structure

white
black
gold

Certificazioni

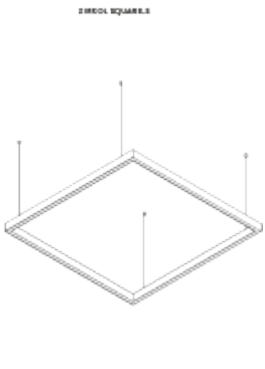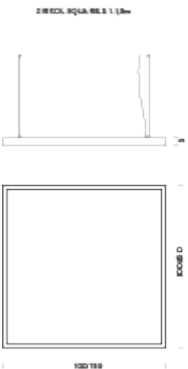

1,5M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	87W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	5290lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	aluminium
Notes	included: remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1615G15WBO
BZRA1615G15WNE
BZRA1615G15WOR

Structure

white
black
gold

Certificazioni

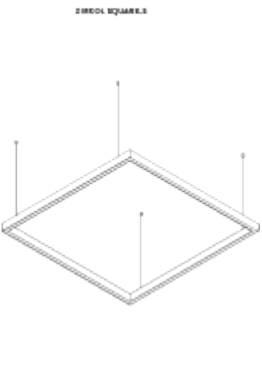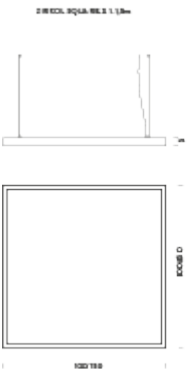

1,5M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	87W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	5880lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	aluminium
Notes	included: remote driver 100W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1615G15NBO
BZRA1615G15NNE
BZRA1615G15NOR

Structure

white
black
gold

Certificazioni

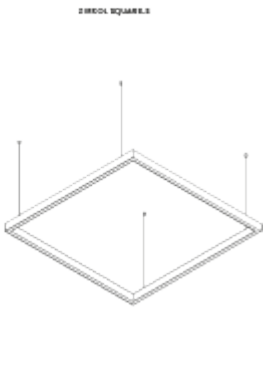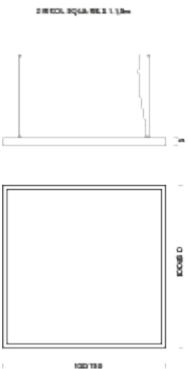

1,5M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	174W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	10000lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	aluminium
Notes	include: remote driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1715G15DBO
BZRA1715G15DNE
BZRA1715G15DOR

Structure

white
black
gold

Certificazioni

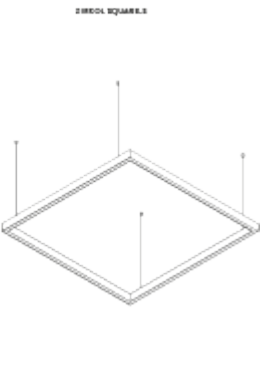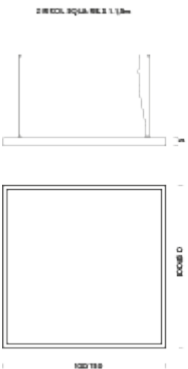

1,5M | UP-DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	174W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	10480lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	aluminium
Notes	include: remote driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems



Codes

BZRA1715G15WBO
BZRA1715G15WNE
BZRA1715G15WOR

Structure

white
black
gold

Certificazioni

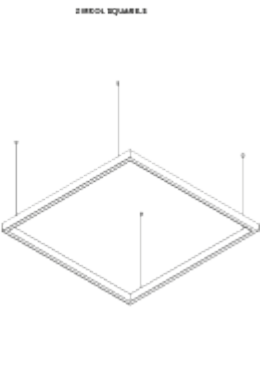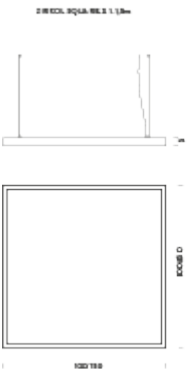

1,5M | UP-DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	174W
Emission	diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	11760lm
Typ CRI	90
IP class	40
Dimensions	150x150x5cm
Materials	aluminium
Notes	include: remote driver 250W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 4 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled
Customization options	external electrical cable light configurations, separate light control, control systems

Codes

BZRA1715G15NBO
BZRA1715G15NNE
BZRA1715G15NOR

Structure

white
black
gold

Certificazioni

