

ZIRKOL SPOT

ZIRKOL verkörpert die perfekte Balance zwischen Design und Beleuchtung, eine Kombination, die sie in der Welt der Architektur unverzichtbar macht. Jedes Produkt ist in verschiedenen Ausführungen und Größen erhältlich. Alle ZIRKOL-Formen werden mit der gleichen Aluminiumstruktur hergestellt und verbinden somit Design und Ästhetik. Erhältlich mit einfachem Downlight und LED-Spots.



1M | 2700K - DALI

LAMPING

Source	strip LED + spot
Total power	60W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	3955lm
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 75W
(110/240V) | 1x dimmer DALI | 1 electrical cable 4m
| 3x adjustable spots up to 90° | 3x adjustable
metal cables (length from 3m to 0,5m) ceiling
attachment included | RAL 9005 black | RAL 9016
white | 396lm for single spot | Shipped assembled


Codes

BZRCF610G15DBO
BZRCF610G15DNE
BZRCF610G15DOR

Structure

white
black
gold

Certificazioni

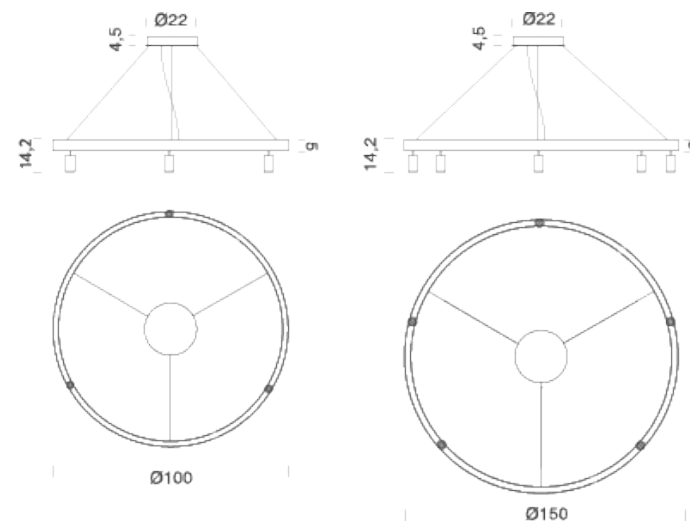

1M | 3000K - DALI

LAMPING

Source	strip LED + spot
Total power	60W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	4393lm
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 75W
(110/240V) | 1x dimmer DALI | 1 electrical cable 4m
| 3x adjustable spots up to 90° | 3x adjustable
metal cables (length from 3m to 0,5m) ceiling
attachment included | RAL 9005 black | RAL 9016
white | 396lm for single spot | Shipped assembled


Codes

BZRCF610G15WBO
BZRCF610G15WNE
BZRCF610G15WOR

Structure

white
black
gold

Certificazioni

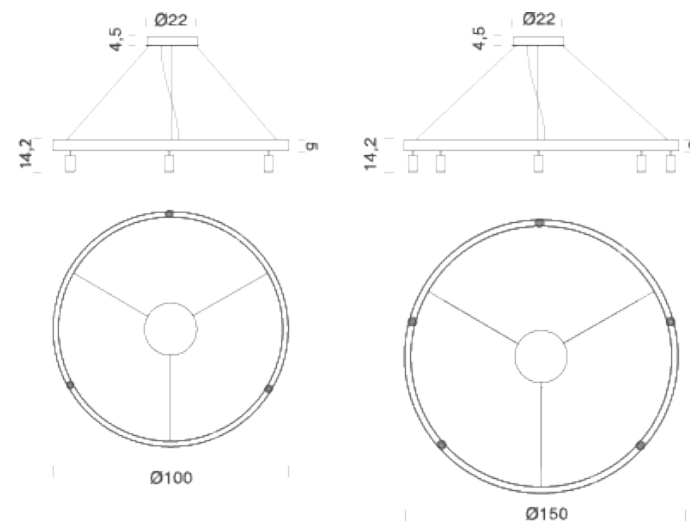

1,5M | 2700K - DALI

LAMPING

Source	strip LED + spot
Total power	93W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	5515lm
Typ CRI	90
IP class	40
Dimensions	ø150x5cm
Materials	aluminium
Notes	

included: round canopy with 1 driver 100W
(110/240V) | 1x dimmer DALI | 1 electrical cable 4m
| 5x adjustable spots up to 90° | 3x adjustable
metal cables (length from 3m to 0,5m) ceiling
attachment included | RAL 9005 black | RAL 9016
white | 396lm for single spot | Shipped assembled


Codes

BZRCF615G15DBO
BZRCF615G15DNE
BZRCF615G15DOR

Structure

white
black
gold

Certificazioni

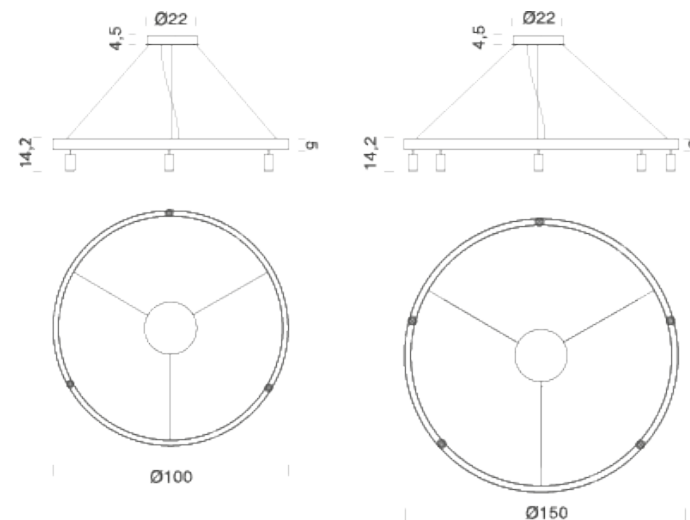

1,5M | 3000K - DALI

LAMPING

Source	strip LED + spot
Total power	93W
Emission	direct downlight
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	6130lm
Typ CRI	90
IP class	40
Dimensions	ø150x5cm
Materials	aluminium
Notes	included: round canopy with 1 driver 100W (110/240V) 1x dimmer DALI 1 electrical cable 4m 5x adjustable spots up to 90° 3x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black RAL 9016 white 396lm for single spot Shipped assembled

Codes

BZRCF615G15WBO
BZRCF615G15WNE
BZRCF615G15WOR

Structure

white
black
gold

Certificazioni

