

# MINIFLUX LINEA TRANSPAREN

Miniflux Linea Transparent ist ein LED-Pendelsystem für die Innenbeleuchtung. Der Körper besteht aus einem Aluminiumprofil, das mit einem Hochleistungs LED-Stripe CRI>97, 24V DC bestückt ist und einem Transparenter Polycarbonat-Diffusor. Erhältlich in schwarzer, weißer und goldener Ausführung. Miniflux ist in zwei Farbtemperaturen und in TRIAC- und DALI-Versionen erhältlich. Vorschaltgerät im Lieferumfang enthalten.



## TRIAC | 2700K

### LAMPING

|                                   |               |
|-----------------------------------|---------------|
| Source                            | LED strip     |
| Total power                       | 15W           |
| Emission                          | direct        |
| Switching                         | TRIAC         |
| Tension                           | 24V           |
| Color temperature                 | 2700K         |
| Luminous flux                     | 852lm         |
| Initial luminaire efficacy        | 57lm/W        |
| Initial chromaticity              | SDCM<3        |
| Typ CRI                           | >97           |
| Energy class                      | F             |
| IP class                          | 40            |
| Dimensions                        | 106xø2cm      |
| Materials                         | polycarbonate |
| Ambient temperature range         | -20°C / +35°C |
| Performance ambient temperature   | 25°C          |
| Mechanical impact protection code | IK08          |
| Notes                             |               |

Customization options  
Net lamp weight

included: canopy with 1 x driver | 1 x electrical  
cable 3m | 2 x adjustable metal cables 2m | driver  
included | canopy RAL 9005 black for black finish |  
canopy RAL 9016 white for white/gold finish  
tube length  
0,6 kg

### Codes

BMLT2710G26DAN  
BMLT2710G26DBO  
BMLT2710G26DAO

### Structure


black  
white  
gold

### PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

### Certificazioni

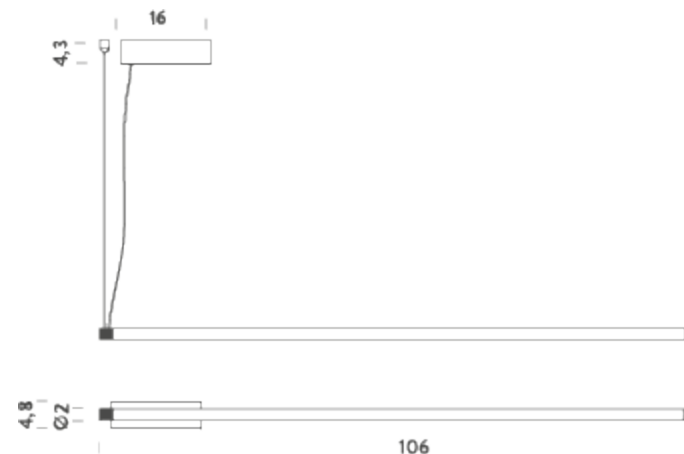

## TRIAC | 3000K

### LAMPING

|                                   |               |
|-----------------------------------|---------------|
| Source                            | LED strip     |
| Total power                       | 15W           |
| Emission                          | direct        |
| Switching                         | TRIAC         |
| Tension                           | 24V           |
| Color temperature                 | 3000K         |
| Luminous flux                     | 897lm         |
| Initial luminaire efficacy        | 60m/W         |
| Initial chromaticity              | SDCM<3        |
| Typ CRI                           | >97           |
| Energy class                      | F             |
| IP class                          | 40            |
| Dimensions                        | 106xø2cm      |
| Materials                         | polycarbonate |
| Ambient temperature range         | -20°C / +35°C |
| Performance ambient temperature   | 25°C          |
| Mechanical impact protection code | IK08          |
| Notes                             |               |

Customization options  
Net lamp weight

included: canopy with 1 x driver | 1 x electrical  
cable 3m | 2 x adjustable metal cables 2m | driver  
included | canopy RAL 9005 black for black finish |  
canopy RAL 9016 white for white/gold finish  
tube length  
0,6 kg

### Codes

BMLT2710G26WAN  
BMLT2710G26WBO  
BMLT2710G26WAO

### Structure


black  
white  
gold

### PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

### Certificazioni

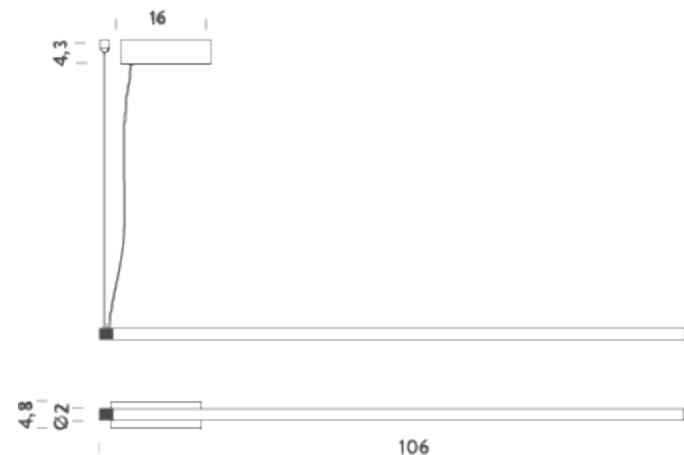

## DALI | 2700K

### LAMPING

|                                   |               |
|-----------------------------------|---------------|
| Source                            | Linear LED    |
| Total power                       | 15W           |
| Emission                          | direct        |
| Switching                         | DALI          |
| Tension                           | 24V           |
| Color temperature                 | 2700K         |
| Luminous flux                     | 852lm         |
| Initial luminaire efficacy        | 57lm/W        |
| Initial chromaticity              | SDCM<3        |
| Typ CRI                           | >97           |
| Energy class                      | F             |
| IP class                          | 40            |
| Dimensions                        | 106xø2cm      |
| Materials                         | polycarbonate |
| Ambient temperature range         | -20°C / +35°C |
| Performance ambient temperature   | 25°C          |
| Mechanical impact protection code | IK08          |
| Notes                             |               |

Customization options  
Net lamp weight

included: canopy with 1 x driver | 1 x electrical  
cable 3m | 2 x adjustable metal cables 2m | driver  
included | canopy RAL 9005 black for black finish |  
canopy RAL 9016 white for white/gold finish  
tube length  
0,6 kg

### Codes

BMLT1610G26DAN  
BMLT1610G26DBO  
BMLT1610G26DAO

### Structure


black  
white  
gold

### PACKAGE

Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

### Certificazioni

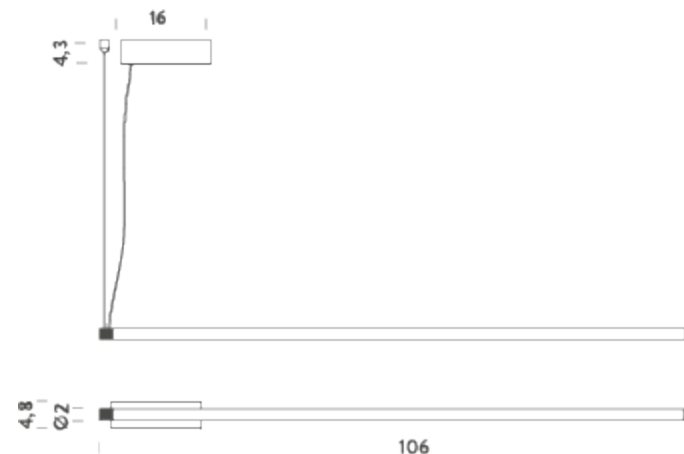

# DALI | 3000K

## LAMPING

|                                   |                                                                                                                                                                                                      |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                            | LED strip                                                                                                                                                                                            |
| Total power                       | 15W                                                                                                                                                                                                  |
| Emission                          | direct                                                                                                                                                                                               |
| Switching                         | DALI                                                                                                                                                                                                 |
| Tension                           | 24V                                                                                                                                                                                                  |
| Color temperature                 | 3000K                                                                                                                                                                                                |
| Luminous flux                     | 897lm                                                                                                                                                                                                |
| Initial luminaire efficacy        | 60m/W                                                                                                                                                                                                |
| Initial chromaticity              | SDCM<3                                                                                                                                                                                               |
| Typ CRI                           | >97                                                                                                                                                                                                  |
| Energy class                      | F                                                                                                                                                                                                    |
| IP class                          | 40                                                                                                                                                                                                   |
| Dimensions                        | 106xø2cm                                                                                                                                                                                             |
| Materials                         | polycarbonate                                                                                                                                                                                        |
| Ambient temperature range         | -20°C / +35°C                                                                                                                                                                                        |
| Performance ambient temperature   | 25°C                                                                                                                                                                                                 |
| Mechanical impact protection code | IK08                                                                                                                                                                                                 |
| Notes                             | included: canopy with 1 x driver   1 x electrical cable 3m   2 x adjustable metal cables 2m   driver included   canopy RAL 9005 black for black finish   canopy RAL 9016 white for white/gold finish |
| Customization options             | tube length                                                                                                                                                                                          |
| Net lamp weight                   | 0,6 kg                                                                                                                                                                                               |

## Codes

BMLT1610G26WAN  
BMLT1610G26WBO  
BMLT1610G26WAO

## PACKAGE

Package 01      Dimension: 140x8x8 cm / Gross weight: 2,4 kg

## Certificazioni

