

# MINIFLUX LINEA WALL

Miniflux Linea ist die neue Serie von linearen Systemen für die allgemeine und dekorative Innenbeleuchtung. Sie ist in drei Versionen erhältlich: als Pendelleuchte mit transparentem oder opalem Diffusor und als Wandleuchte mit einem speziellen Rahmen oder Clip. Der Körper besteht aus einem Aluminiumprofil, auf dem ein 24V DC LED-Streifen mit CRI>97 angebracht ist. Die Kollektion ist in verschiedenen Ausführungen und Farbtemperaturen erhältlich. Inklusive externem Vorschaltgerät (integrierter Treiber für die Wandmontage).



## WALL 8° | 2700K

### LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	2700K
Luminous flux	681lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options  
Net lamp weight

### Codes

BMLA3908026DAN

### PACKAGE

Package 01

### Certificazioni




LED strip  
12W  
direct  
push-button  
24V  
2700K  
681lm  
57lm/W  
SDCM<3  
>97  
F  
40  
102xø3,2cm  
polycarbonate  
-20°C / +35°C  
25°C  
IK08  
wall support with integrated driver and dimmable  
push button included | driver included | RAL 9005  
black  
tube length | external electrical cable  
0,6 kg

### Structure


black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

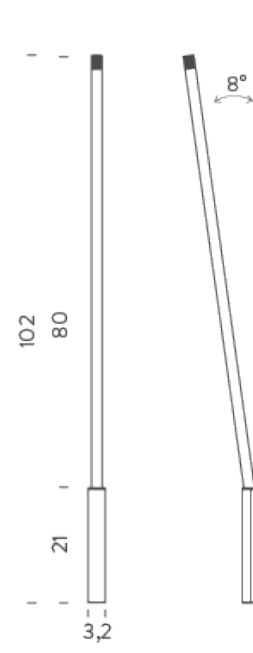

MINIFLUX LINEA WALL

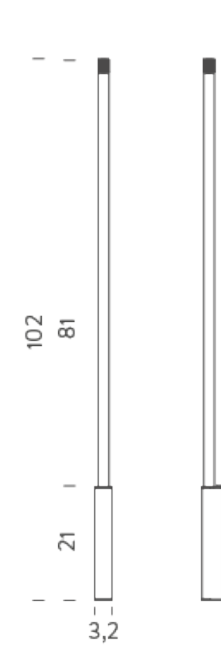

## WALL 8° | 3000K

### LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	3000K
Luminous flux	717lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options  
Net lamp weight

### Codes

BMLA3908026WAN

### PACKAGE

Package 01

### Certificazioni




LED strip  
12W  
direct  
push-button  
24V  
3000K  
717lm  
60m/W  
SDCM<3  
>97  
F  
40  
102xø3,2cm  
polycarbonate  
-20°C / +35°C  
25°C  
IK08  
wall support with integrated driver and dimmable  
push button included | driver included | RAL 9005  
black  
tube length | external electrical cable  
0,6 kg

### Structure


black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

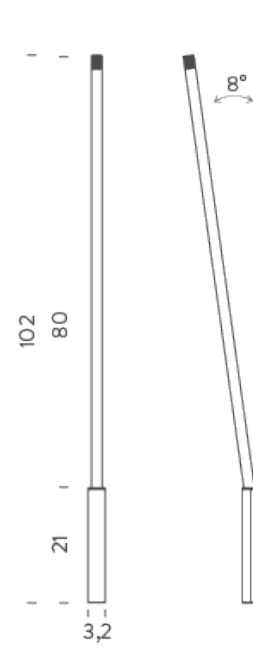

MINIFLUX LINEA WALL

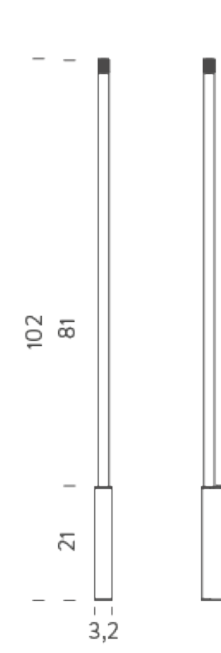

# WALL | 2700K

## LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	2700K
Luminous flux	681lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	wall support with integrated driver and dimmable push button included   driver included   RAL 9005 black

Customization options  
Net lamp weight

**Codes**  
BMLA3908026DAN

**PACKAGE**  
Package 01

## Certificazioni




LED strip  
12W  
direct  
push-button  
24V  
2700K  
681lm  
57lm/W  
SDCM<3  
>97  
40  
102xø3,2cm  
polycarbonate  
-20°C / +35°C  
25°C  
IK08  
wall support with integrated driver and dimmable push button included | driver included | RAL 9005 black  
tube length | external electrical cable  
0,6 kg


**Structure**  
black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

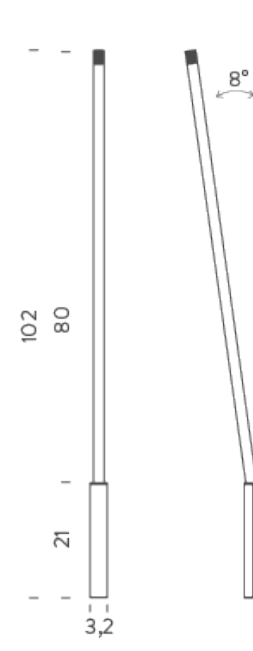

MINIFLUX LINEA WALL

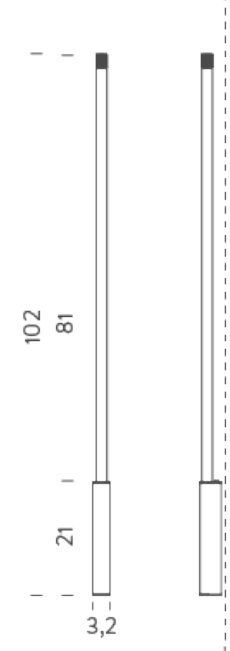

## WALL | 3000K

### LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	3000K
Luminous flux	717lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	wall support with integrated driver and dimmable push button included   driver included   RAL 9005 black

Customization options  
Net lamp weight

### Codes

BMLA3908026WAN

### PACKAGE

Package 01

### Certificazioni




LED strip  
12W  
direct  
push-button  
24V  
3000K  
717lm  
60lm/W  
SDCM<3  
>97  
40  
102xø3,2cm  
polycarbonate  
-20°C / +35°C  
25°C  
IK08  
wall support with integrated driver and dimmable push button included | driver included | RAL 9005 black  
tube length | external electrical cable  
0,6 kg

**Structure**  
black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

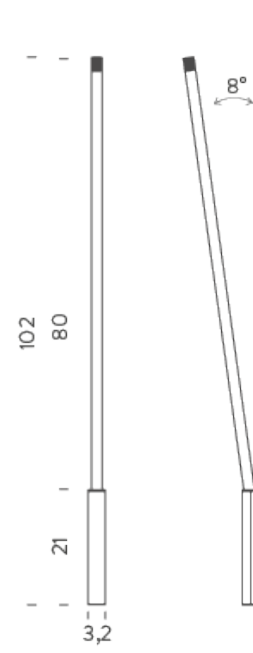

MINIFLUX LINEA WALL

