

FANTE

Fante ist ein leistungsstarker, kompakter, ausrichtbarer und mit 3 Phasen-Stromschienen kompatibler Strahler, der in schwarzer und weißer Ausführung und in den Wattagen 20W, 28W und 28W DALI erhältlich ist. Treiber an Bord.



20W | 2700K

LAMPING

Source	1x LED COB
Total power	20W
Emission	direct adjustable 36°
Switching	ON/OFF
Tension	220/240V
Color temperature	2700K
Luminous flux	2350lm
Initial luminaire efficacy	118lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø10x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	rotating body, orientable spot 90°, compatible with TRACK 3C/DALI

Customization options
Net lamp weight

15° optic
0,85 kg

Codes

MFAN5401757DNE
MFAN5401757DBO

Structure

black
white

PACKAGE


Package 01

Dimension: 21x15,5x11,5 cm / Gross weight: 0,9 kg


Certificazioni




FANTE 20W ON-OFF

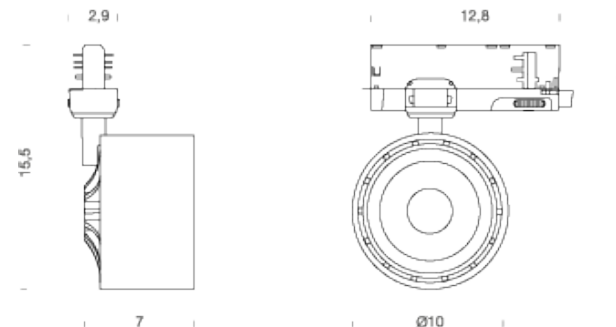

FANTE 28W ON-OFF

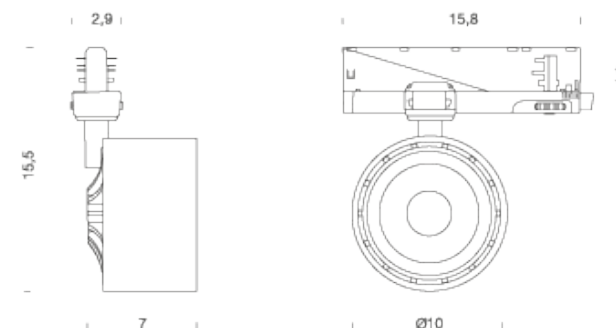

FANTE 28W DALI

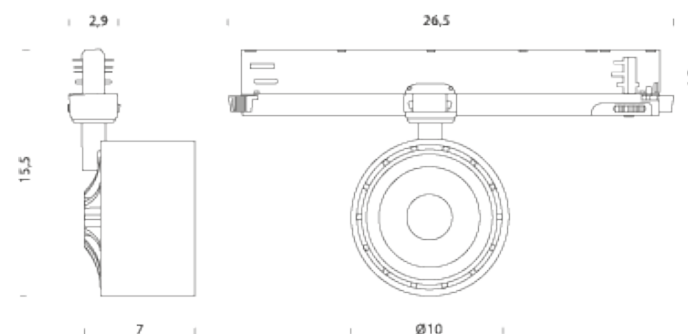

20W | 3000K

LAMPING

Source	1x LED COB
Total power	20W
Emission	direct adjustable 36°
Switching	ON/OFF
Tension	220/240V
Color temperature	3000K
Luminous flux	2450lm
Initial luminaire efficacy	123lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø10x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	rotating body, orientable spot 90°, compatible with TRACK 3C/DALI
Customization options	15° optic
Net lamp weight	0,85 kg

Codes

MFAN5401757WNE
MFAN5401757WBO

PACKAGE

Package 01

Certificazioni




Structure


black
white

Dimension: 21x15,5x11,5 cm / Gross weight: 0,9 kg


FANTE 20W ON-OFF

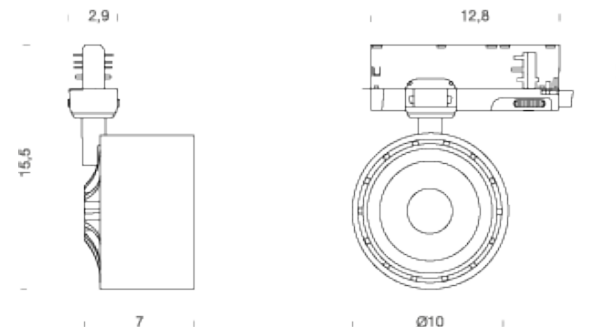

FANTE 28W ON-OFF

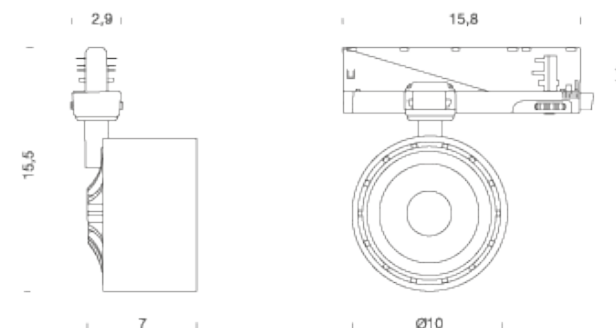

FANTE 28W DALI

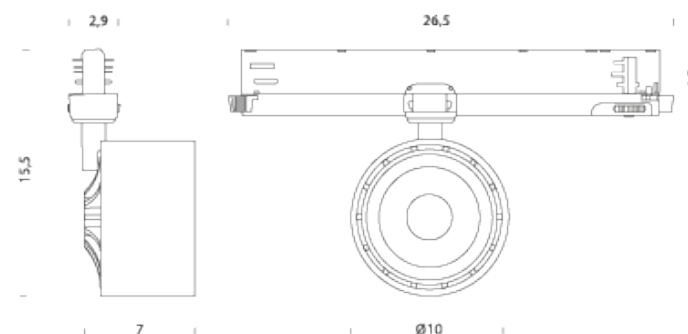

28W | 2700K

LAMPING

Source	1x LED COB
Total power	28W
Emission	direct adjustable 36°
Switching	ON/OFF
Tension	220/240V
Color temperature	2700K
Luminous flux	3265lm
Initial luminaire efficacy	117lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø10x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	rotating body, orientable spot 90°, compatible with TRACK 3C/DALI
Customization options	15° optic
Net lamp weight	0,85 kg

Codes

MFAN5401756DNE
MFAN5401756DBO

PACKAGE

Package 01

Certificazioni




Structure


black
white

Dimension: 21x15,5x11,5 cm / Gross weight: 0,9 kg


FANTE 20W ON-OFF

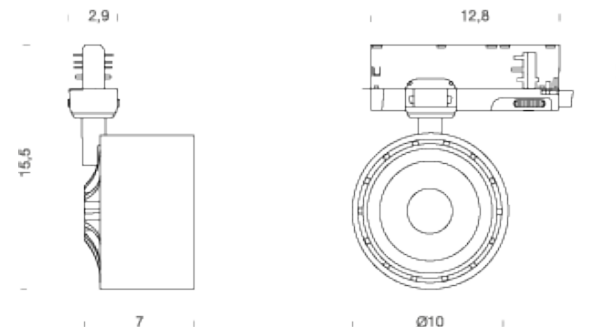

FANTE 28W ON-OFF

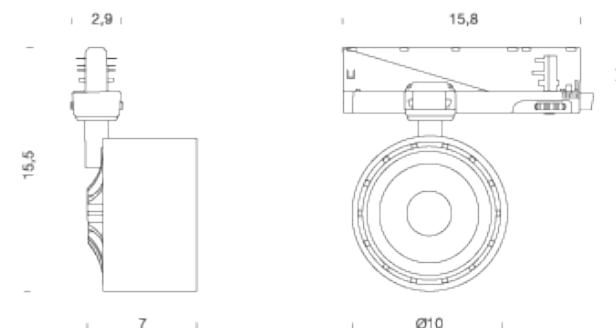

FANTE 28W DALI

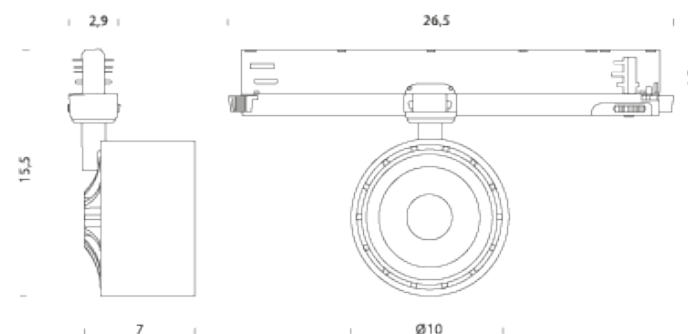

28W | 3000K

LAMPING

Source	1x LED COB
Total power	28W
Emission	direct adjustable 36°
Switching	ON/OFF
Tension	220/240V
Color temperature	3000K
Luminous flux	3340lm
Initial luminaire efficacy	119lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø10x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	rotating body, orientable spot 90°, compatible with TRACK 3C/DALI
Customization options	15° optic
Net lamp weight	0,85 kg

Codes

MFAN5401756WNE
MFAN5401756WBO

PACKAGE

Package 01

Certificazioni




Structure


black
white

Dimension: 21x15,5x11,5 cm / Gross weight: 0,9 kg


FANTE 20W ON-OFF

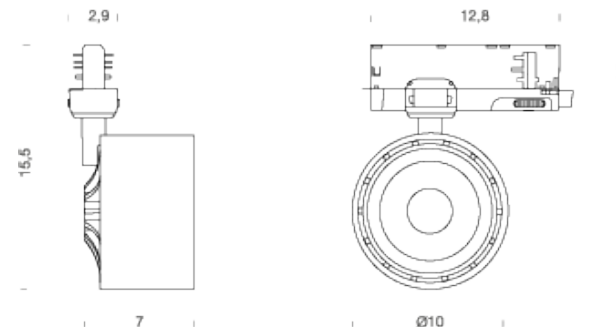

FANTE 28W ON-OFF

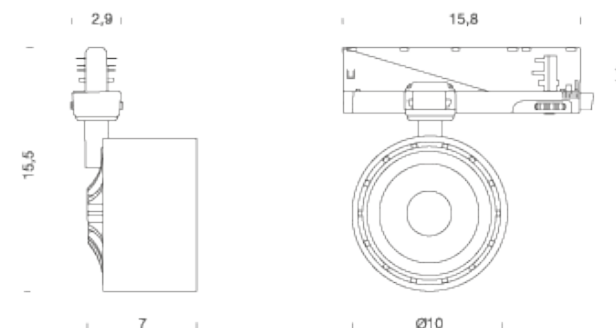

FANTE 28W DALI

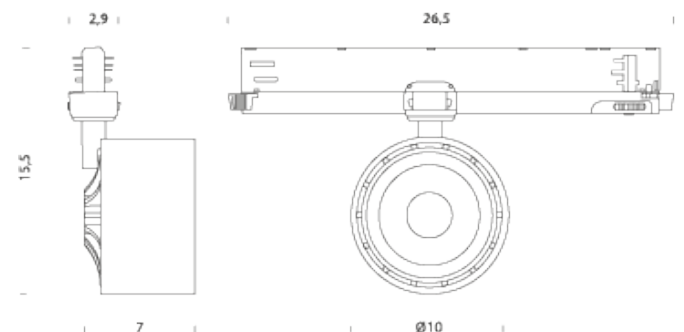

28W - DALI | 2700K

LAMPING

Source	1x LED COB
Total power	28W
Emission	direct adjustable 36°
Switching	DALI
Tension	220/240V
Color temperature	2700K
Luminous flux	3265lm
Initial luminaire efficacy	117lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø10x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	rotating body, orientable spot 90°, compatible with TRACK 3C/DALI
Customization options	15° optic
Net lamp weight	0,9 kg

Codes

MFAN5701756DNE
MFAN5701756DBO

PACKAGE

Package 01

Certificazioni




Structure


black
white

Dimension: 27,5x18x11,5 cm / Gross weight: 0,95 kg


FANTE 20W ON-OFF

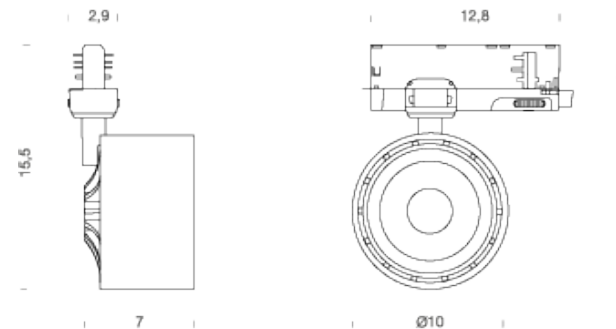

FANTE 28W ON-OFF

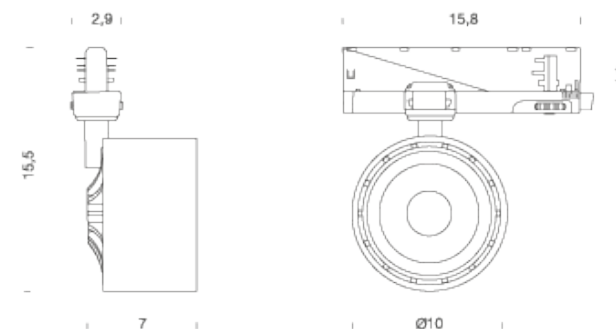

FANTE 28W DALI

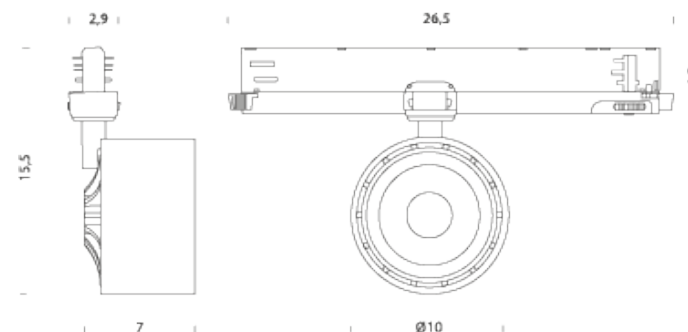

28W - DALI | 3000K

LAMPING

Source	1x LED COB
Total power	28W
Emission	direct adjustable 36°
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	3340lm
Initial luminaire efficacy	119lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	Ø10x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	rotating body, orientable spot 90°, compatible with TRACK 3C/DALI
Customization options	15° optic
Net lamp weight	0,9 kg

Codes

MFAN5701756WNE
MFAN5701756WBO

PACKAGE

Package 01

Certificazioni




Structure


black
white

Dimension: 27,5x18x11,5 cm / Gross weight: 0,95 kg

FANTE 20W ON-OFF

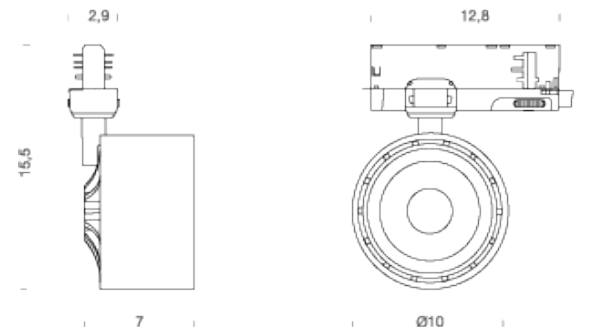

FANTE 28W ON-OFF

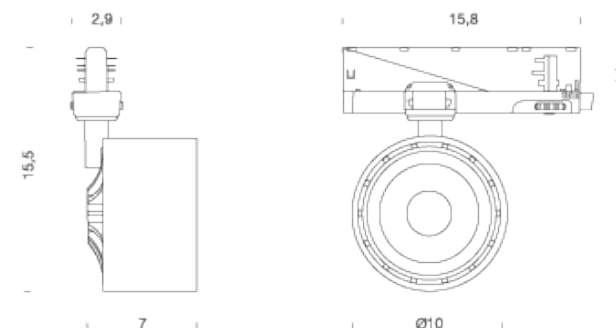

FANTE 28W DALI

