

POP UP

Pop up ist ein runder Einbaustrahler für die Akzentbeleuchtung. Erhältlich in weiß/schwarzer Ausführung.



2700K

LAMPING

Source	1x LED COB
Total power	10W
Emission	direct orientable 38°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	630lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	G
IP class	20
Dimensions	ø10x10,9cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	driver not included, orientable spot, recessed hole Ø90mm, cable length 0,3m
Net lamp weight	0,75 kg

Codes

MPOP0101758DNE
MPOP0101758DBO

Structure


black
white

PACKAGE

Package 01

Dimension: 11,5x11,5x12 cm / Gross weight: 0,8 kg

Certificazioni

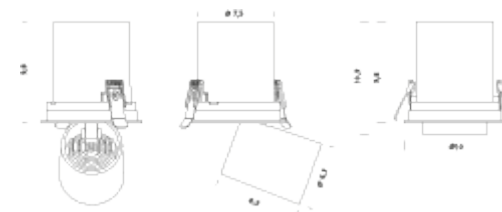

3000K

LAMPING

Source	1x LED COB
Total power	10W
Emission	direct orientable 38°
Switching	according to driver
Tension	max 270mA
Color temperature	3000K
Luminous flux	700lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	G
IP class	20
Dimensions	ø10x10,9cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	driver not included, orientable spot, recessed hole Ø90mm, cable length 0,3m
Net lamp weight	0,75 kg

Codes

MPOP0101758WNE
MPOP0101758WBO

Structure

black
white

PACKAGE

Package 01 Dimension: 11,5x11,5x12 cm / Gross weight: 0,8 kg

Certificazioni

