


# CUCÙ

Cucù ist ein schwenkbarer Einbaustrahler für die Innenbeleuchtung. Er ist in den Oberflächen Sandweiß und Sandschwarz erhältlich. Cucù ist mit einem runden oder quadratischen Rahmen erhältlich.



## ROUND | 2700K

### LAMPING

|                                   |                                                                                            |
|-----------------------------------|--------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                 |
| Total power                       | 6W                                                                                         |
| Emission                          | direct adjustable 38°                                                                      |
| Switching                         | according to driver                                                                        |
| Tension                           | 150mA                                                                                      |
| Color temperature                 | 2700K                                                                                      |
| Luminous flux                     | 450lm                                                                                      |
| Initial luminaire efficacy        | 75lm/W                                                                                     |
| Initial chromaticity              | SDCM<3                                                                                     |
| Typ CRI                           | 90                                                                                         |
| Energy class                      | F                                                                                          |
| IP class                          | 20                                                                                         |
| Dimensions                        | ø8,5x8cm                                                                                   |
| Materials                         | aluminium                                                                                  |
| Ambient temperature range         | 0°C / +35°C                                                                                |
| Performance ambient temperature   | 25°C                                                                                       |
| Mechanical impact protection code | IK03                                                                                       |
| Notes                             | driver not included, orientable spot, trimless<br>recessed hole Ø 60mm, cable length 0,25m |

Net lamp weight

1x LED COB

6W

direct adjustable 38°

according to driver

150mA

2700K

450lm

75lm/W

SDCM<3

90

F

20

ø8,5x8cm

aluminium

0°C / +35°C

25°C

IK03

driver not included, orientable spot, trimless

recessed hole Ø 60mm, cable length 0,25m

0,15 kg

### Codes

MCUR2101759DNE

MCUR2101759DBO

### Structure

black

white

### PACKAGE


Package 01

Dimension: 0,23 cm / Gross weight: 13x12x10,5 kg


### Certificazioni



CUCU' ROUND

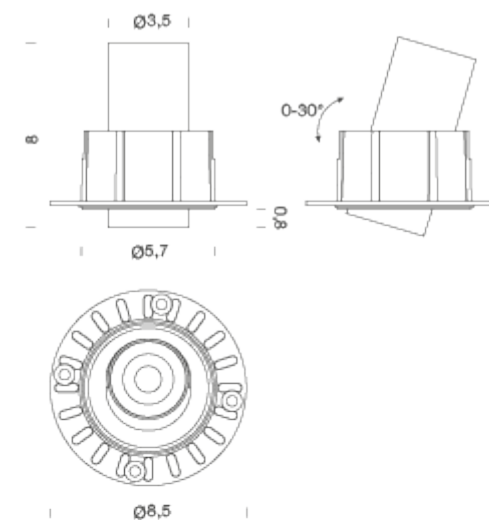

CUCU' SQUARE

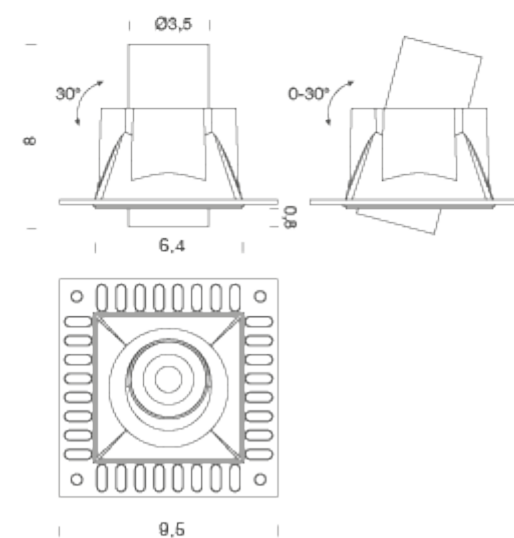

## ROUND | 3000K

### LAMPING

|                                   |                                                                                            |
|-----------------------------------|--------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                 |
| Total power                       | 6W                                                                                         |
| Emission                          | direct adjustable 38°                                                                      |
| Switching                         | according to driver                                                                        |
| Tension                           | 150mA                                                                                      |
| Color temperature                 | 3000K                                                                                      |
| Luminous flux                     | 480lm                                                                                      |
| Initial luminaire efficacy        | 80lm/W                                                                                     |
| Initial chromaticity              | SDCM<3                                                                                     |
| Typ CRI                           | 90                                                                                         |
| Energy class                      | F                                                                                          |
| IP class                          | 20                                                                                         |
| Dimensions                        | ø8,5x8cm                                                                                   |
| Materials                         | aluminium                                                                                  |
| Ambient temperature range         | 0°C / +35°C                                                                                |
| Performance ambient temperature   | 25°C                                                                                       |
| Mechanical impact protection code | IK03                                                                                       |
| Notes                             | driver not included, orientable spot, trimless<br>recessed hole Ø 60mm, cable length 0,25m |

Net lamp weight

0,15 kg

### Codes

MCUR2101759WNE  
MCUR2101759WBO

### Structure

black  
white

### PACKAGE


Package 01

Dimension: 13x12x10,5 cm / Gross weight: 0,23 kg


### Certificazioni



CUCU' ROUND

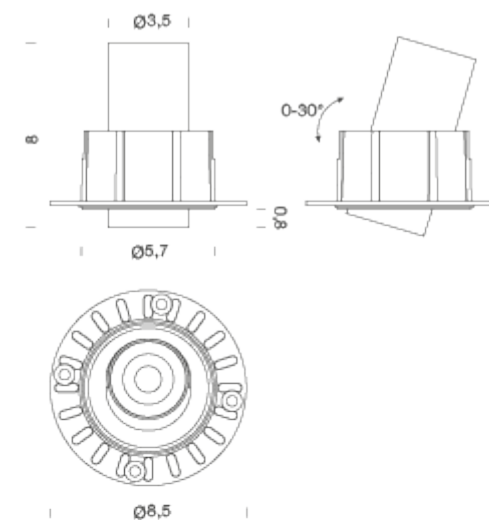

CUCU' SQUARE

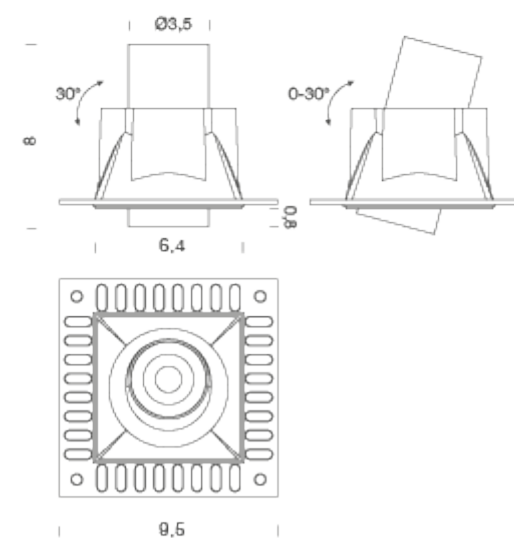

# SQUARE | 2700K

## LAMPING

|                                   |                                                                                            |
|-----------------------------------|--------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                 |
| Total power                       | 6W                                                                                         |
| Emission                          | direct adjustable 38°                                                                      |
| Switching                         | according to driver                                                                        |
| Tension                           | 150mA                                                                                      |
| Color temperature                 | 2700K                                                                                      |
| Luminous flux                     | 450lm                                                                                      |
| Initial luminaire efficacy        | 75lm/W                                                                                     |
| Initial chromaticity              | SDCM<3                                                                                     |
| Typ CRI                           | 90                                                                                         |
| Energy class                      | F                                                                                          |
| IP class                          | 20                                                                                         |
| Dimensions                        | 9,5x3,5x8cm                                                                                |
| Materials                         | aluminium                                                                                  |
| Ambient temperature range         | 0°C / +35°C                                                                                |
| Performance ambient temperature   | 25°C                                                                                       |
| Mechanical impact protection code | IK03                                                                                       |
| Notes                             | driver not included, orientable spot, trimless<br>recessed hole Ø 60mm, cable length 0,25m |

Net lamp weight

## Codes

MCUS2101759DNE  
MCUS2101759DBO

## Structure


black  
white

## PACKAGE

Package 01

Dimension: 13x12x10,5 cm / Gross weight: 0,23 kg

## Certificazioni

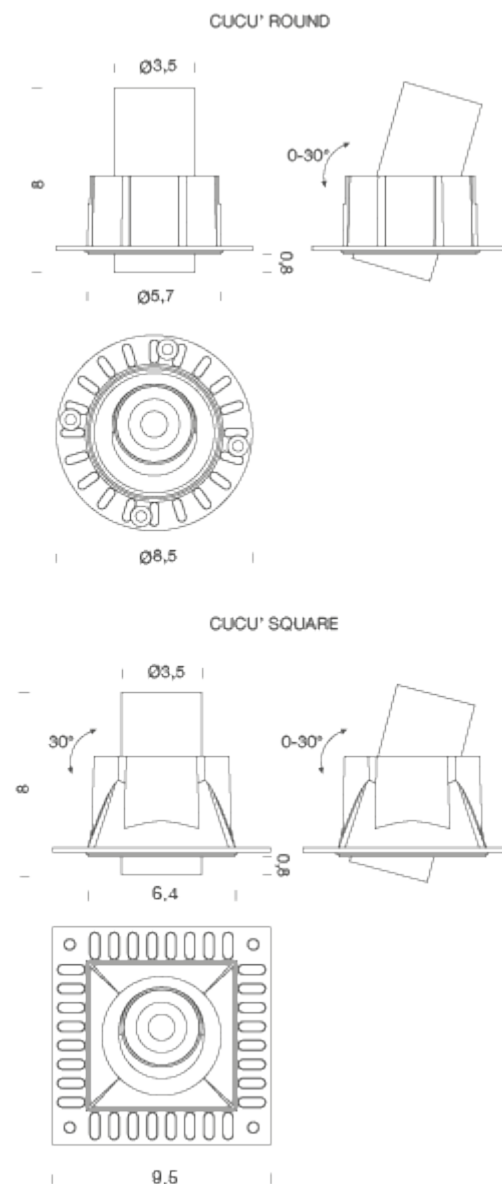

## SQUARE | 3000K

### LAMPING

|                                   |                                                                                            |
|-----------------------------------|--------------------------------------------------------------------------------------------|
| Source                            | 1x LED COB                                                                                 |
| Total power                       | 6W                                                                                         |
| Emission                          | direct adjustable 38°                                                                      |
| Switching                         | according to driver                                                                        |
| Tension                           | 150mA                                                                                      |
| Color temperature                 | 3000K                                                                                      |
| Luminous flux                     | 480lm                                                                                      |
| Initial luminaire efficacy        | 80lm/W                                                                                     |
| Initial chromaticity              | SDCM<3                                                                                     |
| Typ CRI                           | 90                                                                                         |
| Energy class                      | F                                                                                          |
| IP class                          | 20                                                                                         |
| Dimensions                        | 9,5x3,5x8cm                                                                                |
| Materials                         | aluminium                                                                                  |
| Ambient temperature range         | 0°C / +35°C                                                                                |
| Performance ambient temperature   | 25°C                                                                                       |
| Mechanical impact protection code | IK03                                                                                       |
| Notes                             | driver not included, orientable spot, trimless<br>recessed hole Ø 60mm, cable length 0,25m |

Net lamp weight

1x LED COB

6W

direct adjustable 38°

according to driver

150mA

3000K

480lm

80lm/W

SDCM<3

90

F

20

9,5x3,5x8cm

aluminium

0°C / +35°C

25°C

IK03

driver not included, orientable spot, trimless

recessed hole Ø 60mm, cable length 0,25m

0,15 kg

### Codes

MCUS2101759WNE

MCUS2101759WBO

### Structure

black

white

### PACKAGE

Package 01

Dimension: 13x12x10,5 cm / Gross weight: 0,23 kg

### Certificazioni

