

CAPRI PRO

Capri Pro ist der neue Spot der Kollektion für die Akzentbeleuchtung in Innenräumen. CRI 97 für hohe Lichtqualität in Museumsanwendungen. Mit Hilfe von Zubehörfiltern lässt sich die Beleuchtung nahezu individuell gestalten. Die Leuchte kann um 90° in der vertikalen und um 355° in der horizontalen Achse gedreht werden. Die exzellente Wärmeableitungsstruktur und der integrierte Treiber sind perfekt aufeinander abgestimmt. Das integrierte Design sorgt für ein kompakteres und minimalistischeres Erscheinungsbild. Der einstellbare Abstrahlwinkel ermöglicht es, jede Beleuchtungsanforderung zu erfüllen.



2700K | DALI

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	DALI
Tension	220/240V
Color temperature	2700K
Luminous flux	1490lm
Initial luminaire efficacy	65lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	20
Dimensions	ø7,3x23,5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Customization options	4000K CCT
Accessories	Filters, Honeycomb, oval, sand glass Snoot - Barndoor, Snoot, Barndoor
Net lamp weight	1 kg

Codes

MCAP5701971DNE
MCAP5701971DBO

Structure

black
white


PACKAGE

Package 01 Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni



CAPRI PRO DALI

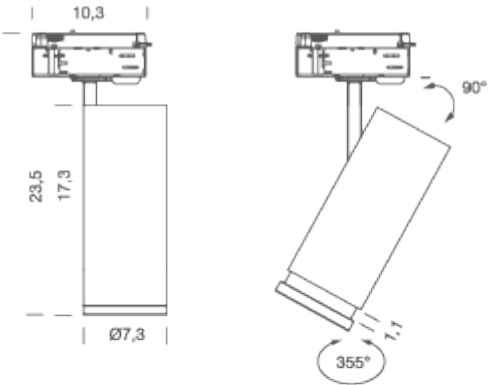

CAPRI PRO DOB

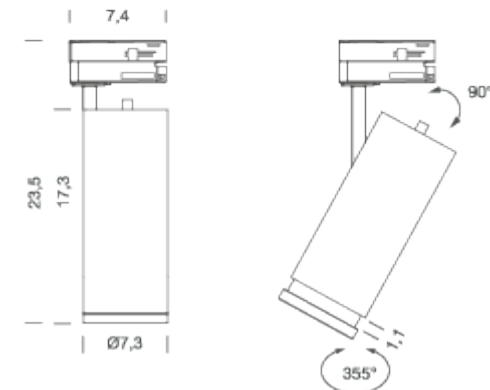

3000K | DALI

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	1570lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	20
Dimensions	ø7,3x23,5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Accessories	Filters, Honeycomb, oval, sand glass Snoot - Barndoor, Snoot, Barndoor
Net lamp weight	1 kg

Codes

MCAP5701971WNE
MCAP5701971WBO


PACKAGE

Package 01 Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni



CAPRI PRO DALI

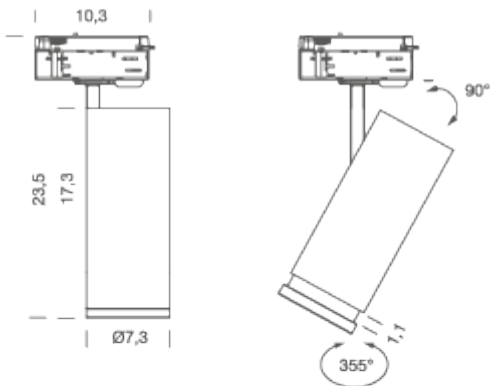

CAPRI PRO DOB

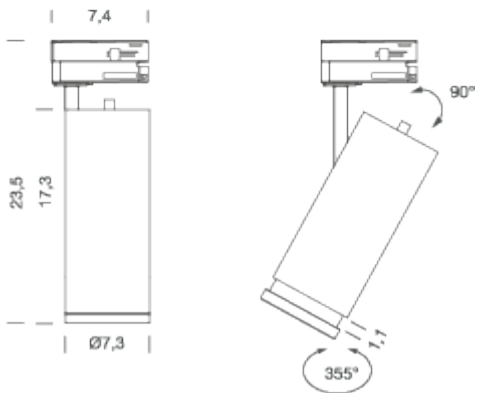

2700K | DIM ON BOARD

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	DIM ON BOARD
Tension	220/240V
Color temperature	2700K
Luminous flux	1490lm
Initial luminaire efficacy	65lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	20
Dimensions	ø7,3x23,5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V

Accessories

Filters, Honeycomb, oval, sand glass | Snoot - Barndoor, Snoot, Barndoor

Net lamp weight

1 kg

Codes

MCAP5901971DNE
MCAP5901971DBO

Structure

black
white

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni



CAPRI PRO DALI

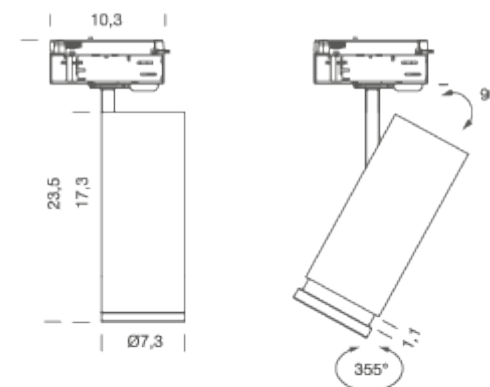

CAPRI PRO DOB

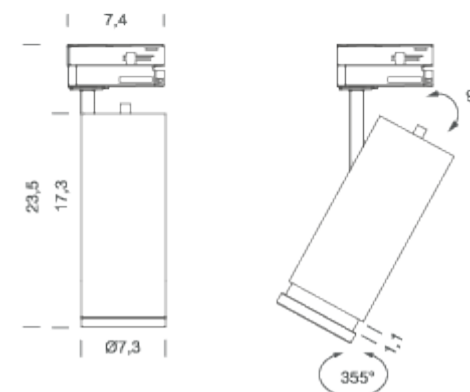

3000K | DIM ON BOARD

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	DIM ON BOARD
Tension	220/240V
Color temperature	3000K
Luminous flux	1570lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	20
Dimensions	ø7,3x23,5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Accessories	Filters, Honeycomb, oval, sand glass Snoot - Barndoor, Snoot, Barndoor
Net lamp weight	1 kg

Codes

MCAP5901971WNE
MCAP5901971WBO

Structure

black
white


PACKAGE

Package 01 Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni



CAPRI PRO DALI

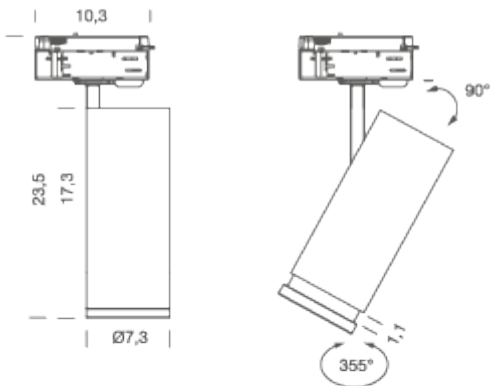

CAPRI PRO DOB

