

PATTERN

Pattern ist ein Einbaudownlight, mit fester Linsen-Optik besteht. Es wird in schwarzer Ausführung in den drei Wattstärken 6W, 10W und 20W angeboten. Treiber nicht enthalten.



6W | 2700K

LAMPING

Source	3x LED
Total power	6W
Emission	direct 36°
Switching	according to driver
Tension	700mA
Color temperature	2700K
Luminous flux	441lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	9,8x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,29 kg

Codes

MPAT2103U67DNE

Structure


black

PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,29 kg

Certificazioni

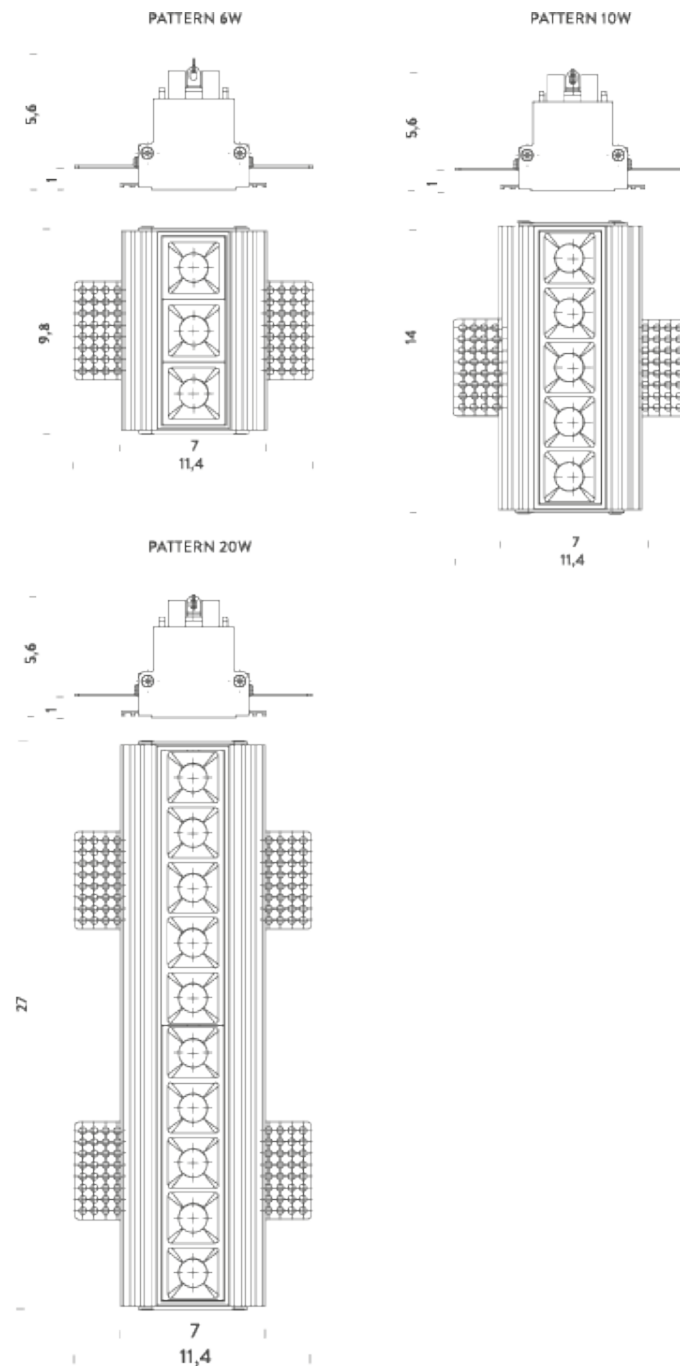

6W | 3000K

LAMPING

Source	3x LED
Total power	6W
Emission	direct 36°
Switching	according to driver
Tension	700mA
Color temperature	3000K
Luminous flux	490lm
Initial luminaire efficacy	82lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	9,8 5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,29 kg

Codes

MPAT2103U67WNE

PACKAGE

Package 01


Certificazioni



Structure

black

Dimension: 19x8x8,5 cm / Gross weight: 0,29 kg

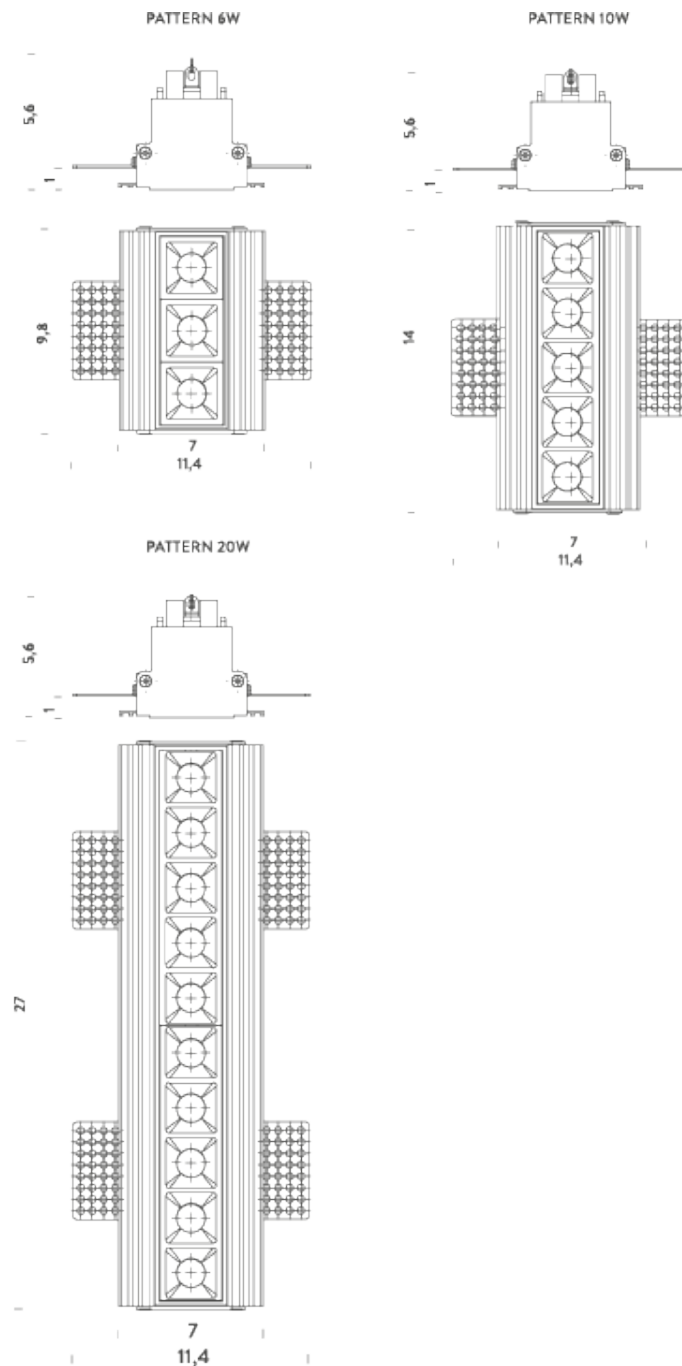

10W | 2700K

LAMPING

Source	5x LED
Total power	10W
Emission	direct 36°
Switching	according to driver
Tension	700mA
Color temperature	2700K
Luminous flux	660lm
Initial luminaire efficacy	66lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	14,1x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°c
Notes	RAL 9005 black , driver not included
Net lamp weight	0,53 kg

Codes

MPAT2105U67DNE

Structure


black

PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,53 kg

Certificazioni

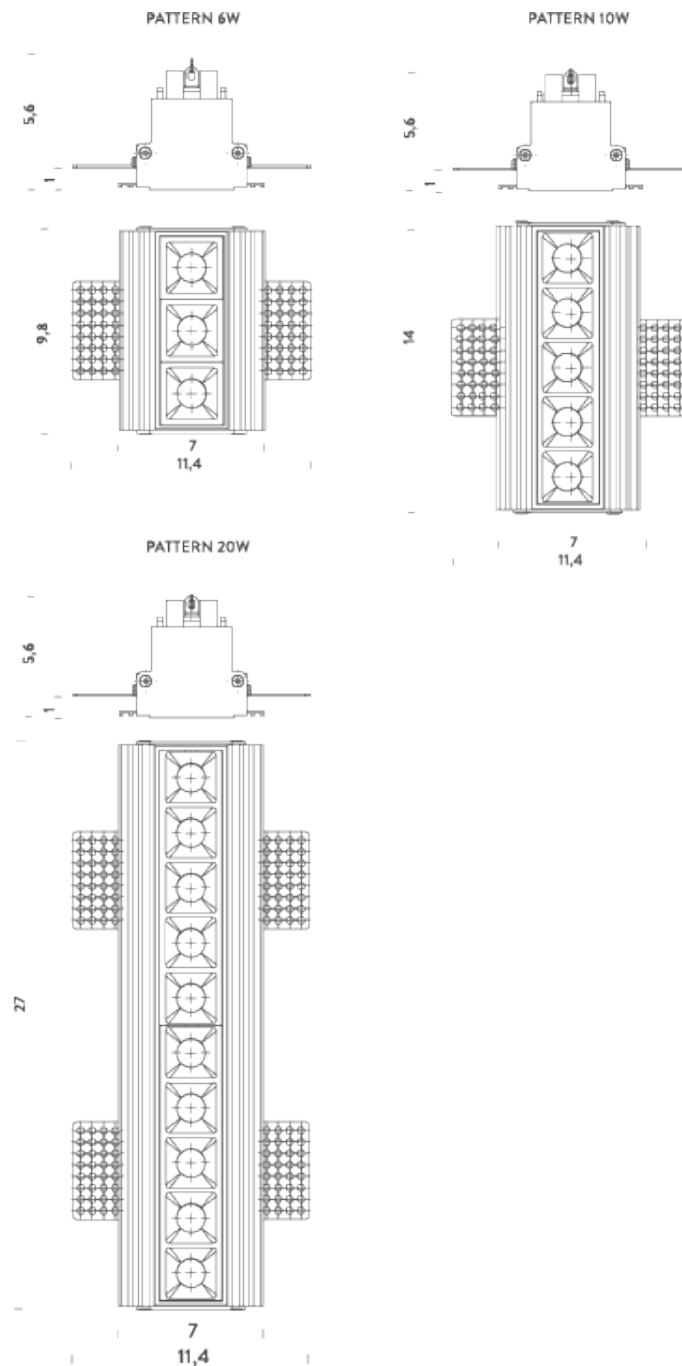

10W | 3000K

LAMPING

Source	5xLED
Total power	10W
Emission	direct 36°
Switching	according to driver
Tension	700mA
Color temperature	3000K
Luminous flux	736lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	14,1x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,53 kg

Codes

MPAT2105U67WNE

Structure


black

PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,53 kg

Certificazioni

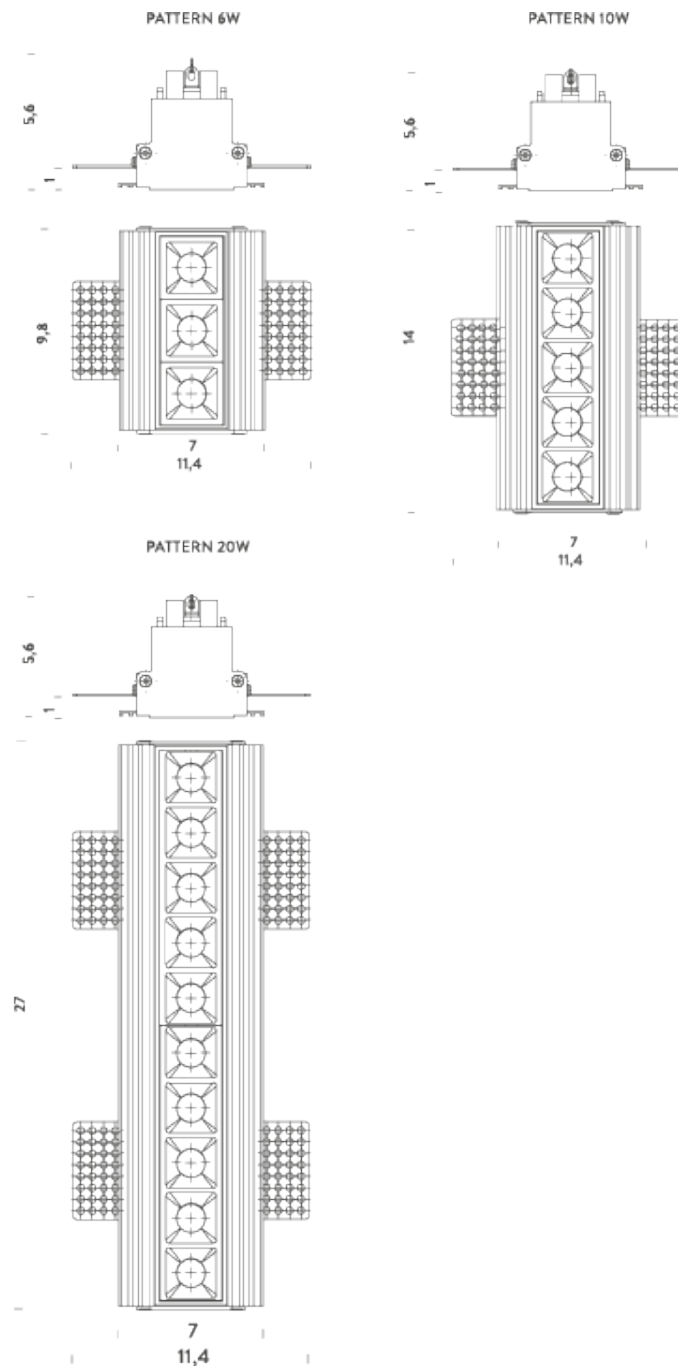

20W | 2700K

LAMPING

Source	10x LED
Total power	20W
Emission	direct 36°
Switching	according to driver
Tension	600mA
Color temperature	2700K
Luminous flux	1330lm
Initial luminaire efficacy	65lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	27,3x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,90 kg

Codes

MPAT2110U67DNE

Structure


black

PACKAGE

Package 01

Dimension: 32,5x8x8,5 cm / Gross weight: 0,90 kg

Certificazioni

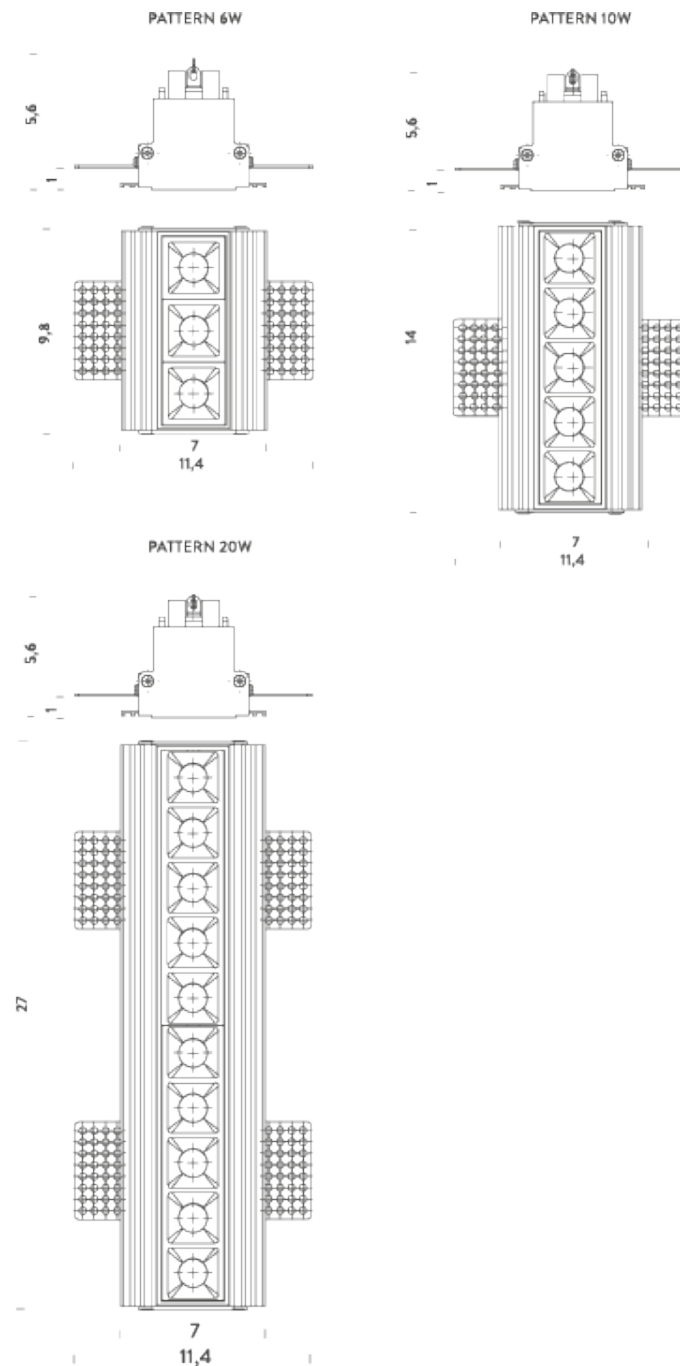

20W | 3000K

LAMPING

Source	10x LED
Total power	20W
Emission	direct 36°
Switching	according to driver
Tension	600mA
Color temperature	3000K
Luminous flux	1444lm
Initial luminaire efficacy	72lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	27,3x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,90 kg

Codes

MPAT2110U67WNE

Structure

black

PACKAGE

Package 01

Dimension: 32,5x8x8,5 cm / Gross weight: 0,90 kg

Certificazioni

