

MINIFLUX LINEA WALL-C OPAL

Miniflux Linea Wall-C ist eine LED-Wandleuchte für die Innenbeleuchtung. Gehäuse aus Aluminiumprofil, auf dem ein LED-Band mit 24 V DC montiert ist. CRI>97. Opalen Polycarbonat-Diffusor. Erhältlich in schwarzer Ausführung. Miniflux ist in zwei Farbtemperaturen.



2700K

LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	2700K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included 2 x clip included
Customization options	tube length indirect light direction external electrical cable
Net lamp weight	0,4 kg

Codes

BMLC4010G26DAN
BMLC4010G26DAR
BMLC4010G26DAO

Structure

black
red
gold


PACKAGE

Package 01 Dimension: 120x8x4 cm / Gross weight: 0,4 kg

Certificazioni



MINIFLUX LINEA WALL - C
opal

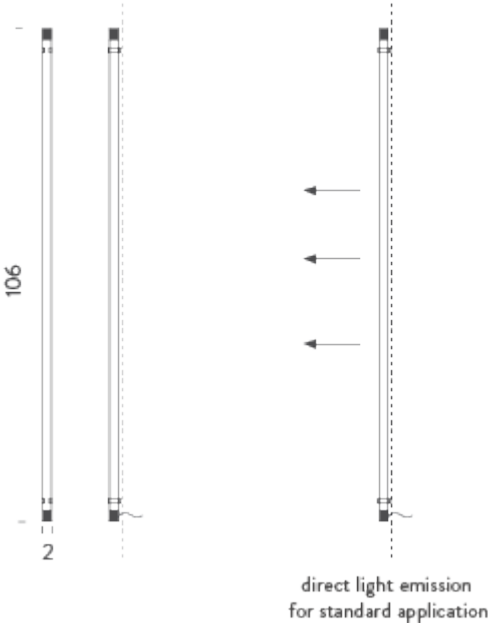

3000K

LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included 2 x clip included
Customization options	tube length indirect light direction external electrical cable
Net lamp weight	0,4 kg

Codes

BMLC4010G26WAN
BMLC4010G26WAR
BMLC4010G26WAO

Structure

black
red
gold

PACKAGE

Package 01

Dimension: 120x8x4 cm / Gross weight: 0,4 kg

Certificazioni



MINIFLUX LINEA WALL - C
opal

