

ZIRKOL ACOUSTIC

ZIRKOL verkörpert die perfekte Balance zwischen Design und Beleuchtung, eine Kombination, die sie in der Welt der Architektur unverzichtbar macht. Jedes Produkt ist in verschiedenen Ausführungen und Größen erhältlich. ZIRKOL ACOUSTIC vervollständigt die Kollektion. Eine Hängeleuchte, die Beleuchtung und Akustik kombiniert. Sie bietet ein angenehmes Ambiente und ist mit einer schallabsorbierenden runden Platte ausgestattet, die mit einem grünen, recycelten Polyestergewebe bezogen ist.



1M | DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2616lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium + polyester
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	round canopy with 1 x driver 75W (110/24V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included Grey sound-absorbing panel 100% polyester FR blue navy or deep green panels available on demand RAL 9005 black RAL 9016 white shipped assembled

Customization options
Net lamp weight

5,83 kg

Codes

BZAC1610G15DBG
BZAC1610G15DNG

Structure

white
black

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 8,61 kg

Certificazioni



ZIRKOL ACOUSTIC

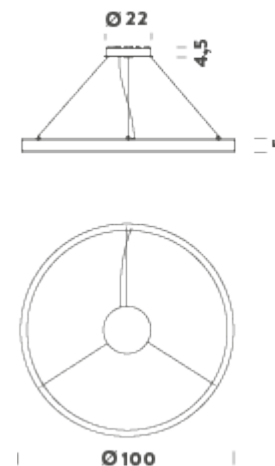

1M | DOWNLIGHT - 3000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium + polyester
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	round canopy with 1 x driver 75W (110/24V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included Grey sound-absorbing panel 100% polyester FR blue navy or deep green panels available on demand RAL 9005 black RAL 9016 white shipped assembled

Customization options
Net lamp weight

5,83 kg

Codes

BZAC1610G15WBV
BZAC1610G15WNV

Structure

white
black

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 8,61 kg

Certificazioni



ZIRKOLACOUSTIC

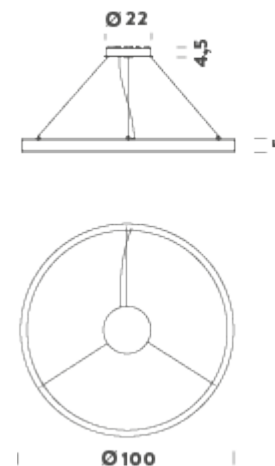

1M | DOWNLIGHT - 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3077lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	ø100x5cm
Materials	aluminium + polyester
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	round canopy with 1 x driver 75W (110/24V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment included Grey sound-absorbing panel 100% polyester FR blue navy or deep green panels available on demand RAL 9005 black RAL 9016 white shipped assembled

Customization options
Net lamp weight

5,83 kg

Codes

BZAC1610G15NBG
BZAC1610G15NNG

Structure

white
black

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 8,61 kg

Certificazioni



ZIRKOL ACOUSTIC

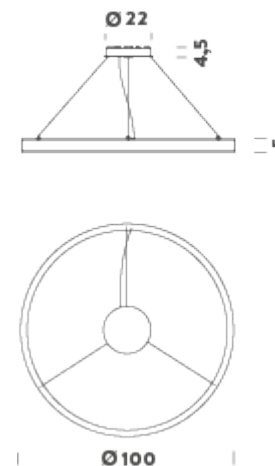

1M | UP-DOWNLIGHT - 2700K

ZIRKOLACOUSTIC

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
90W
diffused orientable
DALI
24V
2700K
5231lm
52lm/W
SDCM<3
90
40
ø100x5cm
aluminium + polyester
0°C / +35°C
25°C
round canopy with 1 x driver 75W (110/24V) | 1 x
dimmer DALI | 1 x electrical cable 4m | 3 x
adjustable metal cable (length from 3m to 0,5m)
ceiling attachment included | Grey sound-
absorbing panel 100% polyester FR | blue navy or
deep green panels available on demand | RAL
9005 black | RAL 9016 white | shipped assembled
blue navy or deep green panels

Customization options
Net lamp weight


Structure
white
black

Codes
BZAC1710G15DBG
BZAC1710G15DNG

PACKAGE
Package 01

Dimension: 115x115x12 cm / Gross weight: 8,61 kg

Certificazioni

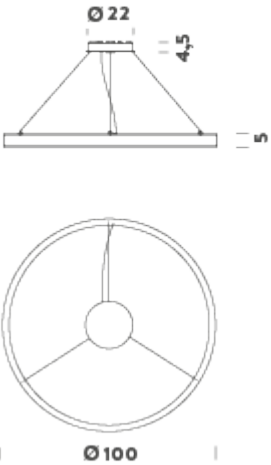

1M | UP-DOWNLIGHT - 3000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
90W
diffused orientable
DALI
24V
3000K
5539lm
62lm/W
SDCM<3
90
40
ø100x5cm
aluminium+polyester
0°C / +35°C
25°C

round canopy with 1 x driver 75W (110/24V) | 1 x
dimmer DALI | 1 x electrical cable 4m | 3 x
adjustable metal cable (length from 3m to 0,5m)
ceiling attachment included | Grey sound-
absorbing panel 100% polyester FR | blue navy or
deep green panels available on demand | RAL
9005 black | RAL 9016 white | shipped assembled
blue navy or deep green panels

Customization options
Net lamp weight

Structure

white
black

Codes

BZAC1710G15WBG
BZAC1710G15WNG

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 8,61 kg

Certificazioni



ZIRKOL ACOUSTIC

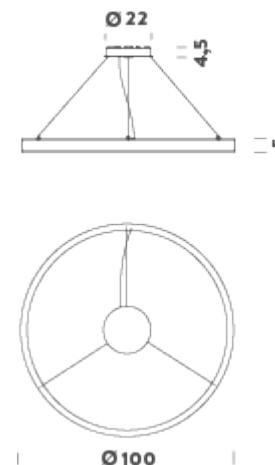

1M | UP-DOWNLIGHT - 4000K

ZIRKOLACOUSTIC

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
90W
diffused orientable
DALI
24V
4000K
6154lm
68lm/W
SDCM<3
90
40
ø100x5cm
aluminium+polyester
0°C / +35°C
25°C
round canopy with 1 x driver 75W (110/24V) | 1 x
dimmer DALI | 1 x electrical cable 4m | 3 x
adjustable metal cable (length from 3m to 0,5m)
ceiling attachment included | Grey sound-
absorbing panel 100% polyester FR | blue navy or
deep green panels available on demand | RAL
9005 black | RAL 9016 white | shipped assembled
blue navy or deep green panels

Customization options
Net lamp weight

Structure
white
black

Codes

BZAC1710G15NBG
BZAC1710G15NNG

PACKAGE

Package 01

Dimension: 115x115x12 cm / Gross weight: 8,61 kg

Certificazioni

