


# LUX WALKWAY

Recessed LED spot for outdoor use suitable for decorative and signalization lighting. Sanded chromed brass body. 1 high-emission LED, with asymmetric beam, protective glass and cable gland. Fixing with recessed plastic installation box LUXCASSA1 (not included) or with the steel fixing springs (included).



3000K

## LAMPING

Source	LED
Total power	1,2W
Emission	Asymmetric
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	10lm
Initial luminaire efficacy	<10lm/W
Initial chromaticity	SDCM < 3
Typ CRI	70
IP class	65
Dimensions	Ø4,4x5,0cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, cable length 1m, series connection
Customization options	CCT 2700K
Accessories	Drivers 350mA,   Recessed box, Recessed box cassa 1
Net lamp weight	0,22 kg

## Codes

BLUX0201217WCS

## Structure


grey

## PACKAGE

Package 01

Dimension: 15x11x5 cm / Gross weight: 0,22 kg

## Certificazioni

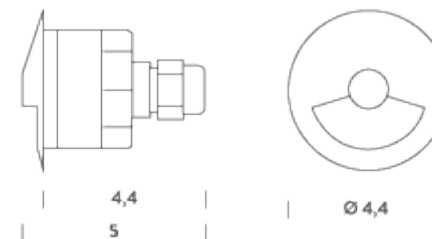

5000K

## LAMPING

Source	LED
Total power	1,2W
Emission	Asymmetric
Switching	according to driver
Tension	350mA
Color temperature	5000K
Luminous flux	12lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	65
Dimensions	Ø4,4x5,0cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, cable length 1m, series connection
Customization options	CCT 2700K
Accessories	Drivers 350mA,   Recessed box, Recessed box cassa 1
Net lamp weight	0,22 kg

## Codes

BLUX02012170CS

## Structure

grey

## PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

## Certificazioni

