

ALICUDI

Family of indoor recessed downlight spotlights for accent lighting.

Alicudi is available in various finishes, beam angles and colour temperatures.

Minimal design, soft light without glare and an easy installation procedure make Alicudi the suitable spot able to satisfy any project requirement.



RECESSED TRIM 30° | 2700K

LAMPING

Source	LED
Total power	2,5W
Emission	direct adjustable 30°
Switching	according to driver
Tension	700mA
Color temperature	2700K
Luminous flux	155lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	> 90
Energy class	G
IP class	20
Dimensions	ø4x3,9cm
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included, trim spot recessed hole Ø 35mm, depth 100mm, cable length 0,5m, series connection
Accessories	Drivers, Alicudi
Net lamp weight	0,07 kg

Codes

ALT LW2 63
ALT LN2 63

Structure

white
black

PACKAGE


Package 01

Dimension: 5x5x4 cm / Gross weight: 0,09 kg

Certificazioni



ALICUDI

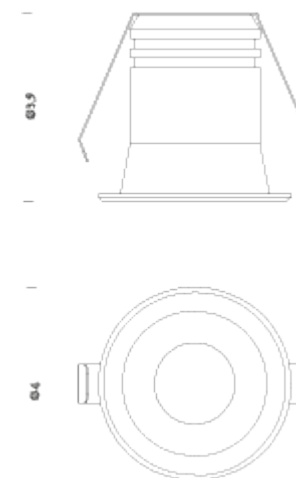

RECESSED TRIM 30° | 3000K

LAMPING

Source	LED
Total power	2,5W
Emission	direct adjustable 30°
Switching	according to driver
Tension	700mA
Color temperature	3000K
Luminous flux	190lm
Initial luminaire efficacy	76lm/W
Initial chromaticity	SDCM<3
Typ CRI	> 90
Energy class	G
IP class	20
Dimensions	ø4x3,9cm
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included, trim spot recessed hole Ø 35mm, depth 100mm, cable length 0,5m, series connection
Accessories	Drivers, Alicudi
Net lamp weight	0,07 kg

Codes

ALT LW3 63
ALT LN3 63

Structure

white
black

PACKAGE

Package 01

Dimension: 5x5x4 cm / Gross weight: 0,09 kg

Certificazioni



ALICUDI

