

ZIRKOL LINEAR

Zirkol Linear is a family of linear suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen to a homogeneous lighting. CRI > 90

Light emission can be direct light and double light emission with high flux and different colour temperatures. Remote driver and dimmer interface included.



1M | DOWNLIGHT - 2700K

LAMPING

| | |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 14,5W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 2700K |
| Luminous flux | 833lm |
| Initial luminaire efficacy | 57lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 100x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 1,32 kg |

Codes

BZRL1610G15DBO
BZRL1610G15DNE
BZRL1610G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni

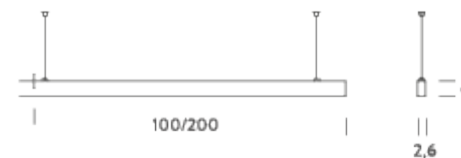

1M | UP - DOWNLIGHT -2700K

LAMPING

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 29W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 2700K |
| Luminous flux | 1666lm |
| Initial luminaire efficacy | 57lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 100x2,6x5cm |
| Materials | aluminum |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 1,32 kg |

Codes

BZRL1710G15DBO
BZRL1710G15DNE
BZRL1710G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | DOWNLIGHT - 3000K

LAMPING

| | |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 14,5W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 3000K |
| Luminous flux | 882lm |
| Initial luminaire efficacy | 61lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 100x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 1,32 kg |

Codes

BZRL1610G15WOB
BZRL1610G15WNE
BZRL1610G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni

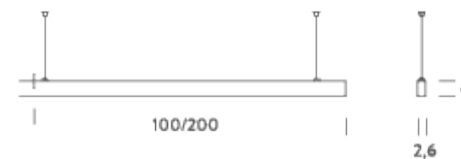

1M | UP - DOWNLIGHT -3000K

LAMPING

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 29W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 3000K |
| Luminous flux | 1764lm |
| Initial luminaire efficacy | 68lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 100x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 1,32 kg |

Codes

BZRL1710G15WBO
BZRL1710G15WNE
BZRL1710G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | DOWNLIGHT - 4000K

LAMPING

| | |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 14,5W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 4000K |
| Luminous flux | 980lm |
| Initial luminaire efficacy | 68lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 100x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 20W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 x adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 1,32 kg |

Codes

BZRL1610G15NBO
BZRL1610G15NNE
BZRL1610G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



1M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 29W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 4000K |
| Luminous flux | 1960lm |
| Initial luminaire efficacy | 68lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 100x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 1,32 kg |

Codes

BZRL1710G15NBO
BZRL1710G15NNE
BZRL1710G15NNE

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 115x11x11 cm / Gross weight: 2,12 kg

Certificazioni



2M | DOWNLIGHT - 2700K

LAMPING

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 29W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 2700K |
| Luminous flux | 1666lm |
| Initial luminaire efficacy | 57lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 200x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 2,69 kg |

Codes

BZRL1620G15DBO
BZRL1620G15DNE
BZRL1620G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 58W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 2700K |
| Luminous flux | 3332lm |
| Initial luminaire efficacy | 57lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 200x2,6x5cm |
| Materials | aluminum |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 2,69 kg |

Codes

BZRL1720G15DBO
BZRL1720G15DNE
BZRL1720G15DOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | DOWNLIGHT - 3000K

LAMPING

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 29W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 3000K |
| Luminous flux | 1764lm |
| Initial luminaire efficacy | 61lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 200x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 2,69 kg |

Codes

BZRL1620G15WBO
BZRL1620G15WNE
BZRL1620G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 58W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 3000K |
| Luminous flux | 3528lm |
| Initial luminaire efficacy | 61lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | E |
| IP class | 40 |
| Dimensions | 200x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 2,69 kg |

Codes

BZRL1720G15WBO
BZRL1720G15WNE
BZRL1720G15WOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni



2M | DOWNLIGHT - 4000K

LAMPING

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 29W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 4000K |
| Luminous flux | 1960lm |
| Initial luminaire efficacy | 68lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 200x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 2,69 kg |

Codes

BZRL1620G15NBO
BZRL1620G15NNE
BZRL1620G15NOR


Structure

white
black
matt gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni

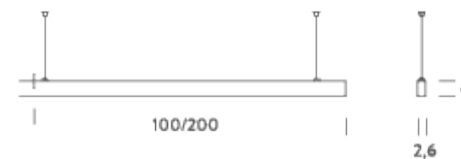

2M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source | LED strip |
| Total power | 58W |
| Emission | diffused orientable |
| Switching | DALI |
| Tension | 24V |
| Color temperature | 4000K |
| Luminous flux | 3920lm |
| Initial luminaire efficacy | 68lm/W |
| Initial chromaticity | SDCM<3 |
| Typ CRI | 90 |
| Energy class | D |
| IP class | 40 |
| Dimensions | 200x2,6x5cm |
| Materials | aluminium |
| Ambient temperature range | 0°C / +35°C |
| Performance ambient temperature | 25°C |
| Notes | included: 1 x driver 60W (220/240V) 1 x dimmer DALI 1 electrical cable length 5m 2 adjustable metal cable length 3m (including ceiling attachment) remote driver RAL 9005 black RAL 9016 white shipped assembled |
| Customization options | light configurations, separate light control, control systems |
| Accessories | Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |
| Net lamp weight | 2,69 kg |

Codes

BZRL1720G15NBO
BZRL1720G15NNE
BZRL1720G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 250x11x11 cm / Gross weight: 4,69 kg

Certificazioni

