


# ZIRKOL CEILING

The contemporary purism of the Zirkol collection now extends to the new Zirkol Ceiling: for the first time ILTI Luce offers a ceiling application of the Zirkol Circle. The harmonious circular edges merge with the linear element hiding the integrated driver through a magnetic box. Available in a variety of diameters, Zirkol Ceiling responds to both residential and professional needs, avoiding the installations of a remote accessories.

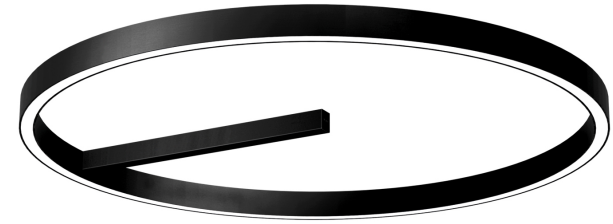

Ø 0,85M | 2700K

### LAMPING

Source	LED strip
Total power	35W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2000lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø85m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options  
Net lamp weight

integrated driver box with 1 x driver Superslim  
60W Dali2/Push Dali (220/240V) | RAL 9005 black |  
RAL 9016 white | shipped assembled  
lumen output, finish  
3 kg

### Codes

BZRCD408G15DBO  
BZRCD408G15DNE  
BZRCD408G15DOR

### Structure

white  
black  
gold

### PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

### Certificazioni



### ZIRKOL CEILING 0,8-1,5 M

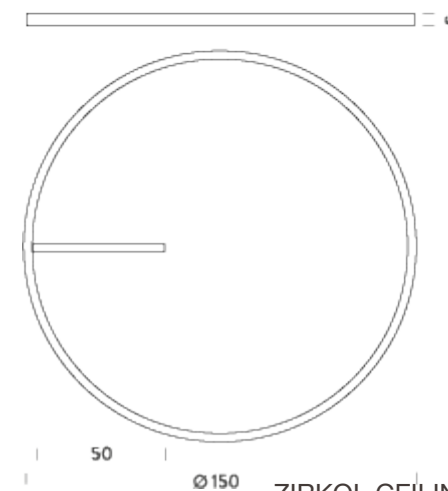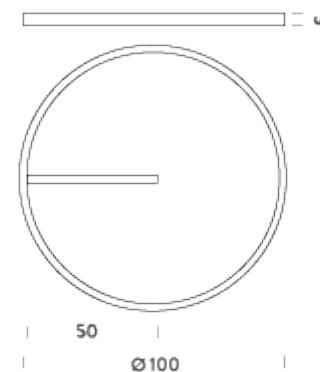

Ø 0,85M | 3000K

### LAMPING

Source	LED strip
Total power	35W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø85m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options  
Net lamp weight

integrated driver box with 1 x driver Superslim  
60W Dali2/Push Dali (220/240V) | RAL 9005 black |  
RAL 9016 white | shipped assembled  
lumen output, finish  
3 kg

### Codes

BZRCD408G15WBO  
BZRCD408G15WNE  
BZRCD408G15WOR

### Structure

white  
black  
gold

### PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

### Certificazioni



### ZIRKOL CEILING 0,8-1,5 M

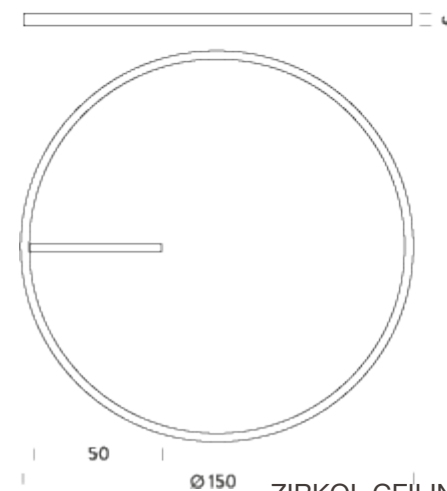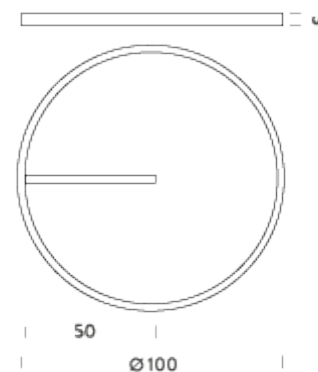

Ø 0,85M | 4000K

### LAMPING

Source	LED strip
Total power	35W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	2360lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø85m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options  
Net lamp weight

integrated driver box with 1 x driver Superslim  
60W Dali2/Push Dali (220/240V) | RAL 9005 black |  
RAL 9016 white | shipped assembled  
lumen output, finish  
3 kg

### Codes

BZRCD408G15NBO  
BZRCD408G15NNE  
BZRCD408G15NOR

### Structure

white  
black  
gold

### PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

### Certificazioni



### ZIRKOL CEILING 0,8-1,5 M

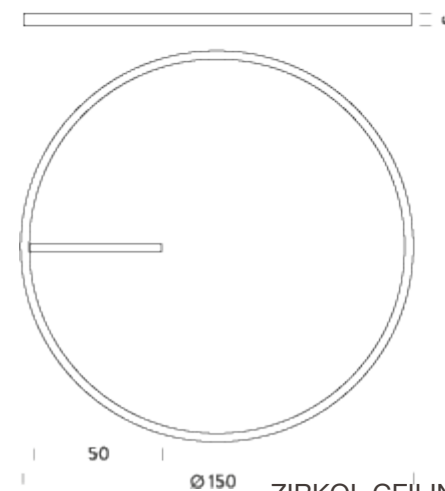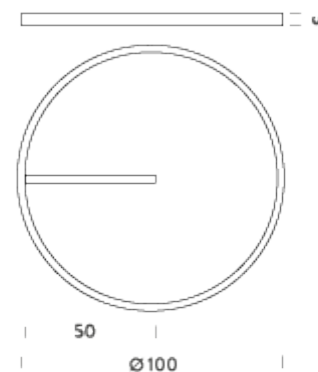

Ø 1M | 2700K

### LAMPING

Source	LED strip
Total power	45W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2616lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø 1m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	integrated driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V)   RAL 9005 black   RAL 9016 white   shipped assembled

Customization options  
Net lamp weight

lumen output, finish  
4 kg

### Codes

BZRCD410G15DBO  
BZRCD410G15DNE  
BZRCD410G15DOR

### Structure

white  
black  
gold

### PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

### Certificazioni



### ZIRKOL CEILING 0,8-1-1,5 M

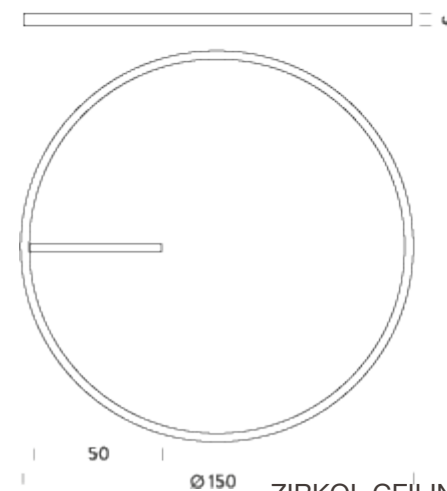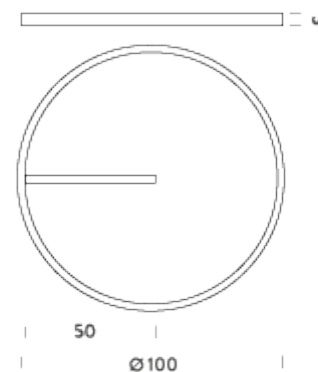

Ø 1M | 3000K

### LAMPING

Source	LED strip
Total power	45W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø 1m x 5cm
Materials	aluminimu
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	integrated driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V)   RAL 9005 black   RAL 9016 white   shipped assembled

Customization options  
Net lamp weight

lumen output, finish  
4 kg

### Codes

BZRCD410G15WBO  
BZRCD410G15WNE  
BZRCD410G15WOR

### Structure

white  
black  
gold

### PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

### Certificazioni



### ZIRKOL CEILING 0,8-1-1,5 M

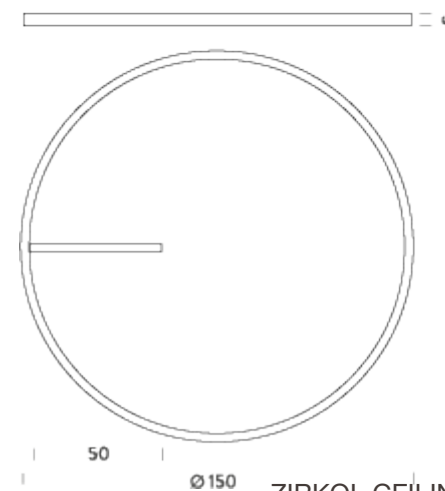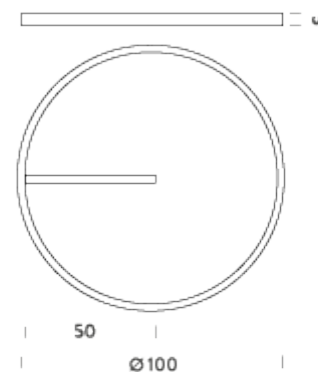

Ø 1M | 4000K

### LAMPING

Source	LED strip
Total power	45W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3077lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	Ø 1m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	integrated driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V)   RAL 9005 black   RAL 9016 white   shipped assembled

Customization options  
Net lamp weight

lumen output, finish  
4 kg

### Codes

BZRCD410G15NBO  
BZRCD410G15NNE  
BZRCD410G15NOR

### Structure

white  
black  
gold

### PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

### Certificazioni



### ZIRKOL CEILING 0,8-1-1,5 M

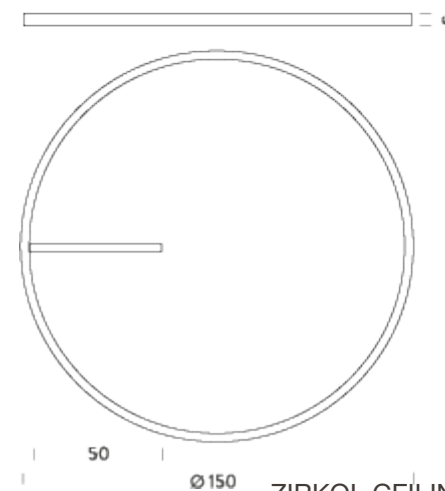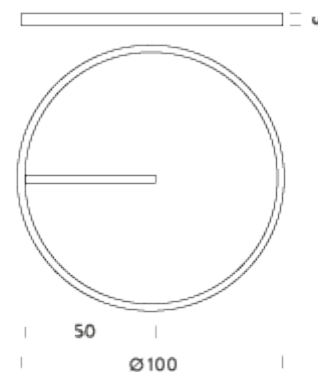

Ø 1,5M | 2700K

### LAMPING

Source	LED strip
Total power	60W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3923lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø 1,5m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options  
Net lamp weight

integrated driver box with 1 x driver Superslim  
60W Dali2/Push Dali (220/240V) | RAL 9005 black |  
RAL 9016 white | shipped assembled  
lumen output, finish  
5,4 kg

### Codes

BZRCD415G15DBO  
BZRCD415G15DNE  
BZRCD415G15DOR

### Structure

white  
black  
gold

### PACKAGE




Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg

### Certificazioni



### ZIRKOL CEILING 0,8-1-1,5 M

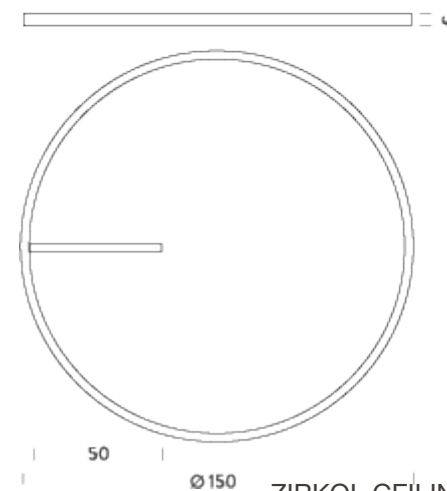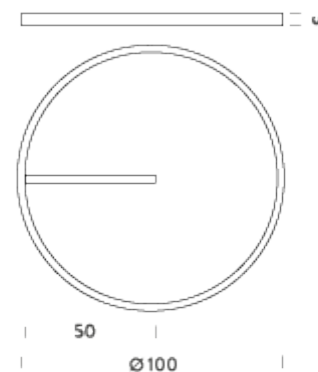



Ø 1,5M | 3000K

### LAMPING

Source	LED strip
Total power	60W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	4154lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø 1,5m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options  
Net lamp weight

integrated driver box with 1 x driver Superslim  
60W Dali2/Push Dali (220/240V) | RAL 9005 black |  
RAL 9016 white | shipped assembled  
lumen output, finish  
5,4 kg

### Codes

BZRCD415G15WBO  
BZRCD415G15WNE  
BZRCD415G15WOR

### Structure

white  
black  
gold

### PACKAGE




Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg

### Certificazioni



### ZIRKOL CEILING 0,8-1,5 M

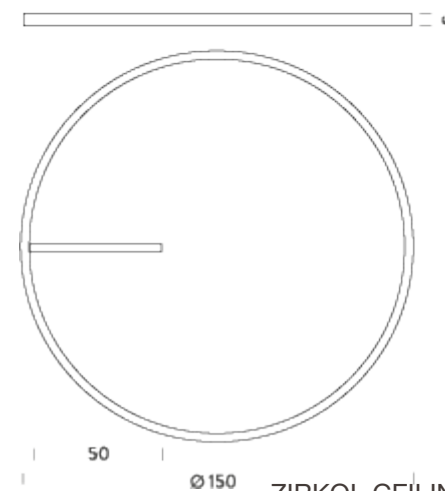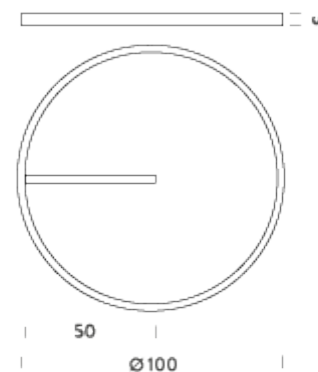

Ø 1,5M | 4000K

### LAMPING

Source	LED strip
Total power	60W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	4616lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	Ø 1,5m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options  
Net lamp weight

integrated driver box with 1 x driver Superslim  
60W Dali2/Push Dali (220/240V) | RAL 9005 black |  
RAL 9016 white | shipped assembled  
lumen output, finish  
5,4 kg

### Codes

BZRCD415G15NBO  
BZRCD415G15NNE  
BZRCD415G15NOR

### Structure

white  
black  
gold

### PACKAGE

Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg

### Certificazioni



### ZIRKOL CEILING 0,8-1-1,5 M

