


# ZIRKOL GAP

Starting from Zirkol Circle, Zirkol Gap is for general and decorative lighting. Anodised aluminium body and opal cover for homogeneous downlight and uplight emission. Available in the finishes black, white and matte gold and with LED colour temperatures of 2700K, 3000K and 4000K. Remote driver and dimmer interface included.

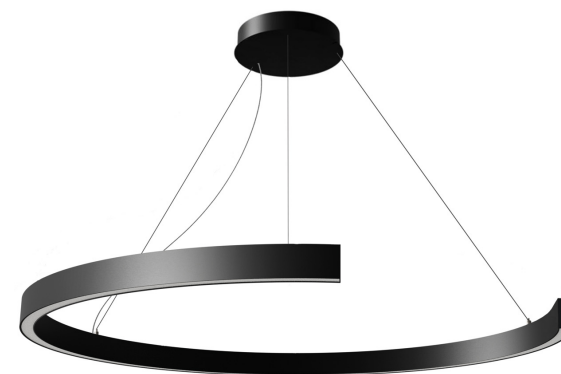

Ø0,85M | DOWNLIGHT - 2700K

LAMPING

|                                 |                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                        |
| Total power                     | 26W                                                                                                                                                                                                                              |
| Emission                        | diffused                                                                                                                                                                                                                         |
| Switching                       | DALI                                                                                                                                                                                                                             |
| Tension                         | 24V                                                                                                                                                                                                                              |
| Color temperature               | 2700K                                                                                                                                                                                                                            |
| Luminous flux                   | 1500lm                                                                                                                                                                                                                           |
| Initial luminaire efficacy      | 58lm/W                                                                                                                                                                                                                           |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                           |
| Typ CRI                         | 90                                                                                                                                                                                                                               |
| IP class                        | 40                                                                                                                                                                                                                               |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                          |
| Materials                       | aluminium                                                                                                                                                                                                                        |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                      |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                             |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                        |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                             |

Codes

BZRG1608G15DBO  
BZRG1608G15DNE  
BZRG1608G15DOR



Structure

white  
black  
gold

PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|

Certificazioni



Ø0,85M | DOWNLIGHT - 3000K

LAMPING

|                                 |                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                        |
| Total power                     | 26W                                                                                                                                                                                                                              |
| Emission                        | diffused                                                                                                                                                                                                                         |
| Switching                       | DALI                                                                                                                                                                                                                             |
| Tension                         | 24V                                                                                                                                                                                                                              |
| Color temperature               | 3000K                                                                                                                                                                                                                            |
| Luminous flux                   | 1650lm                                                                                                                                                                                                                           |
| Initial luminaire efficacy      | 63lm/W                                                                                                                                                                                                                           |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                           |
| Typ CRI                         | 90                                                                                                                                                                                                                               |
| IP class                        | 40                                                                                                                                                                                                                               |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                          |
| Materials                       | aluminium                                                                                                                                                                                                                        |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                      |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                             |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                        |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                             |

Codes

BZRG1608G15WBO  
BZRG1608G15WNE  
BZRG1608G15WOR



Structure

white  
black  
gold

PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|

Certificazioni



Ø0,85M | DOWNLIGHT - 4000K

LAMPING

|                                 |                                                                                                                                                                                                                                  |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                        |
| Total power                     | 26W                                                                                                                                                                                                                              |
| Emission                        | diffused                                                                                                                                                                                                                         |
| Switching                       | DALI                                                                                                                                                                                                                             |
| Tension                         | 24V                                                                                                                                                                                                                              |
| Color temperature               | 4000K                                                                                                                                                                                                                            |
| Luminous flux                   | 1770lm                                                                                                                                                                                                                           |
| Initial luminaire efficacy      | 68lm/W                                                                                                                                                                                                                           |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                           |
| Typ CRI                         | 90                                                                                                                                                                                                                               |
| IP class                        | 40                                                                                                                                                                                                                               |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                          |
| Materials                       | aluminium                                                                                                                                                                                                                        |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                      |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                             |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                        |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                             |

Codes

BZRG1608G15NBO  
BZRG1608G15NNE  
BZRG1608G15NOR



Structure

white  
black  
gold

PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|

Certificazioni



Ø0,85M | UP-DOWNLIGHT - 2700K

LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 45W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 2700K                                                                                                                                                                                                                              |
| Luminous flux                   | 3000lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 67lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                               |

Codes

BZRG1708G15DBO  
BZRG1708G15DNE  
BZRG1708G15DOR



Structure

white  
black  
gold

PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|

Certificazioni



Ø0,85M | UP-DOWNLIGHT - 3000K

LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 45W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 3000K                                                                                                                                                                                                                              |
| Luminous flux                   | 3300lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 73lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                               |

Codes

BZRG1708G15WBO  
BZRG1708G15WNE  
BZRG1708G15WOR



Structure

white  
black  
gold

PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|

Certificazioni



Ø0,85M | UP-DOWNLIGHT - 4000K

LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 45W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 4000K                                                                                                                                                                                                                              |
| Luminous flux                   | 3540lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 79lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø85x5cm                                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                               |

Codes

BZRG1708G15NBO  
BZRG1708G15NNE  
BZRG1708G15NOR



Structure

white  
black  
gold

PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|

Certificazioni



# Ø1M | DOWNLIGHT - 2700K

## LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 26W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 2700K                                                                                                                                                                                                                              |
| Luminous flux                   | 1962lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 75lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø100x5cm                                                                                                                                                                                                                           |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                               |

## Codes

BZRG1610G15DBO  
BZRG1610G15DNE  
BZRG1610G15DOR



## Structure

white  
black  
gold

## PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|

## Certificazioni





Ø1M | DOWNLIGHT - 3000K

LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 26W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 3000K                                                                                                                                                                                                                              |
| Luminous flux                   | 2077lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 80lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø100x5cm                                                                                                                                                                                                                           |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                               |

Codes

BZRG1610G15WBO  
BZRG1610G15WNE  
BZRG1610G15WOR



Structure

white  
black  
gold

PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|

Certificazioni



# Ø1M | DOWNLIGHT - 4000K

## LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 26W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 4000K                                                                                                                                                                                                                              |
| Luminous flux                   | 2308lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 89lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø100x5cm                                                                                                                                                                                                                           |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |
| Net lamp weight                 | 3 kg                                                                                                                                                                                                                               |

## Codes

BZRG1610G15NBO  
BZRG1610G15NNE  
BZRG1610G15NOR



## Structure

white  
black  
gold

## PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 5,5 kg |
|------------|-------------------------------------------------|

## Certificazioni



Ø1M | UP-DOWNLIGHT - 2700K

LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 68W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 2700K                                                                                                                                                                                                                              |
| Luminous flux                   | 3923lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 57lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø100x5cm                                                                                                                                                                                                                           |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |
| Net lamp weight                 | 4 kg                                                                                                                                                                                                                               |

Codes

BZRG1710G15DBO  
BZRG1710G15DNE  
BZRG1710G15DOR



Structure

white  
black  
gold

PACKAGE

|            |                                                 |
|------------|-------------------------------------------------|
| Package 01 | Dimension: 115x115x12 cm / Gross weight: 6,5 kg |
|------------|-------------------------------------------------|

Certificazioni



Ø1M | UP-DOWNLIGHT - 3000K

LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 68W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 3000K                                                                                                                                                                                                                              |
| Luminous flux                   | 4154lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 61lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | Ø100x5cm                                                                                                                                                                                                                           |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |
| Net lamp weight                 | 4 kg                                                                                                                                                                                                                               |

Codes

BZRG1710G15WBO  
BZRG1710G15WNE  
BZRG1710G15WOR



Structure

white  
black  
gold

PACKAGE

Package 01                      Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni




## LAMPING

| Codes          | Structure |
|----------------|-----------|
| BZRG1710G15NBO | white     |
| BZRG1710G15NNE | black     |
| BZRG1710G15NOR | gold      |

Package 01                      Dimension: 115x115x12 cm / Gross weight: 6,5 kg

CE  UK  
CA



Ø1,5M | DOWNLIGHT - 2700K

LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 50W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 2700K                                                                                                                                                                                                                              |
| Luminous flux                   | 2942lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø150x5cm                                                                                                                                                                                                                           |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |



Codes

BZRG1615G15DBO  
BZRG1615G15DNE  
BZRG1615G15DOR

Structure

white  
black  
gold

Certificazioni



# Ø1,5M | DOWNLIGHT - 3000K

## LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 50W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 3000K                                                                                                                                                                                                                              |
| Luminous flux                   | 3115lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 62lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø150x5cm                                                                                                                                                                                                                           |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |



## Codes

BZRG1615G15WBO  
BZRG1615G15WNE  
BZRG1615G15WOR

## Structure

white  
black  
gold

## Certificazioni



Ø1,5M | DOWNLIGHT - 4000K

LAMPING

|                                 |                                                                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                          |
| Total power                     | 50W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                           |
| Switching                       | DALI                                                                                                                                                                                                                               |
| Tension                         | 24V                                                                                                                                                                                                                                |
| Color temperature               | 4000K                                                                                                                                                                                                                              |
| Luminous flux                   | 3462lm                                                                                                                                                                                                                             |
| Initial luminaire efficacy      | 69lm/W                                                                                                                                                                                                                             |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                             |
| Typ CRI                         | 90                                                                                                                                                                                                                                 |
| IP class                        | 40                                                                                                                                                                                                                                 |
| Dimensions                      | ø150x5cm                                                                                                                                                                                                                           |
| Materials                       | aluminium                                                                                                                                                                                                                          |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                        |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                               |
| Notes                           | included: round canopy with 1 x driver 75W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                          |



Codes

BZRG1615G15NBO  
BZRG1615G15NNE  
BZRG1615G15NOR

Structure

white  
black  
gold

Certificazioni





Ø1,5M | UP-DOWNLIGHT - 2700K

LAMPING

|                                 |                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                           |
| Total power                     | 100W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                            |
| Switching                       | DALI                                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                                 |
| Color temperature               | 2700K                                                                                                                                                                                                                               |
| Luminous flux                   | 5885lm                                                                                                                                                                                                                              |
| Initial luminaire efficacy      | 59lm/W                                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                                  |
| Dimensions                      | ø150x5cm                                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                |
| Notes                           | included: round canopy with 1 x driver 100W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                           |



Codes

BZRG1715G15DBO  
BZRG1715G15DNE  
BZRG1715G15DOR

Structure

white  
black  
gold

Certificazioni



Ø1,5M | UP-DOWNLIGHT - 3000K

LAMPING

|                                 |                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                           |
| Total power                     | 100W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                            |
| Switching                       | DALI                                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                                 |
| Color temperature               | 3000K                                                                                                                                                                                                                               |
| Luminous flux                   | 6231lm                                                                                                                                                                                                                              |
| Initial luminaire efficacy      | 62lm/W                                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                                  |
| Dimensions                      | ø150x5cm                                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                |
| Notes                           | included: round canopy with 1 x driver 100W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                           |



Codes

BZRG1715G15WBO  
BZRG1715G15WNE  
BZRG1715G15WOR

Structure

white  
black  
gold

Certificazioni



Ø1,5M | UP-DOWNLIGHT - 4000K

LAMPING

|                                 |                                                                                                                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Source                          | LED strip                                                                                                                                                                                                                           |
| Total power                     | 100W                                                                                                                                                                                                                                |
| Emission                        | diffused                                                                                                                                                                                                                            |
| Switching                       | DALI                                                                                                                                                                                                                                |
| Tension                         | 24V                                                                                                                                                                                                                                 |
| Color temperature               | 4000K                                                                                                                                                                                                                               |
| Luminous flux                   | 6924lm                                                                                                                                                                                                                              |
| Initial luminaire efficacy      | 69lm/W                                                                                                                                                                                                                              |
| Initial chromaticity            | SDCM<3                                                                                                                                                                                                                              |
| Typ CRI                         | 90                                                                                                                                                                                                                                  |
| IP class                        | 40                                                                                                                                                                                                                                  |
| Dimensions                      | ø150x5cm                                                                                                                                                                                                                            |
| Materials                       | aluminium                                                                                                                                                                                                                           |
| Ambient temperature range       | 0°C / +35°C                                                                                                                                                                                                                         |
| Performance ambient temperature | 25°C                                                                                                                                                                                                                                |
| Notes                           | included: round canopy with 1 x driver 100W (110/240V)   1 x dimmer DALI   1 x electrical cable 4m   3 x adjustable metal cable (length from 3m to 0,5m)   ceiling attachment   RAL 9005 black   RAL 9016 white   shipped assembled |
| Customization options           | external electrical cable   light configurations, separate light control, control systems                                                                                                                                           |

Codes

BZRG1715G15NBO  
BZRG1715G15NNE  
BZRG1715G15NOR

Structure

white  
black  
gold

Certificazioni

