

# MINIFLUX LINEA WALL

Miniflux Linea is the new range of linear systems for general and decorative interior lighting. Available in different versions: pendant with transparent or opal diffuser and wall-mounted by means of a special frame or clip. Aluminum profile body on which a 24V DC LED strip with CRI>97 is positioned. The collection is offered in different finishes and color temperatures. Remote driver is included (onboard driver for wall-mounted version).



# WALL 8° | 2700K

## LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	2700K
Luminous flux	681lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options  
Net lamp weight

LED strip
12W
direct
push-button
24V
2700K
681lm
57lm/W
SDCM<3
>97
F
40
102xø3,2cm
polycarbonate
-20°C / +35°C
25°C
IK08
wall support with integrated driver and dimmable
push button included   driver included   RAL 9005
black
tube length   external electrical cable
0,6 kg

## Codes

BMLA3908026DAN

## Structure

black

## PACKAGE


Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg


## Certificazioni



MINIFLUX LINEA WALL 8°

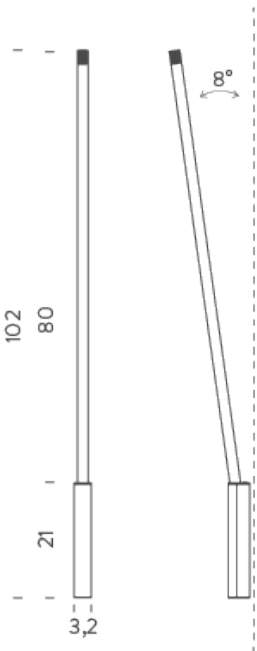

MINIFLUX LINEA WALL

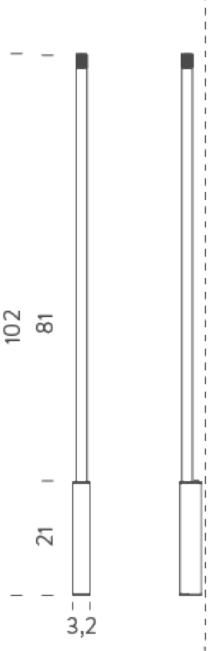

# WALL 8° | 3000K

## LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	3000K
Luminous flux	717lm
Initial luminaire efficacy	60m/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options  
Net lamp weight

LED strip
12W
direct
push-button
24V
3000K
717lm
60m/W
SDCM<3
>97
F
40
102xø3,2cm
polycarbonate
-20°C / +35°C
25°C
IK08
wall support with integrated driver and dimmable
push button included   driver included   RAL 9005
black
tube length   external electrical cable
0,6 kg

## Codes

BMLA3908026WAN

## Structure

black

## PACKAGE


Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg


## Certificazioni



MINIFLUX LINEA WALL 8°

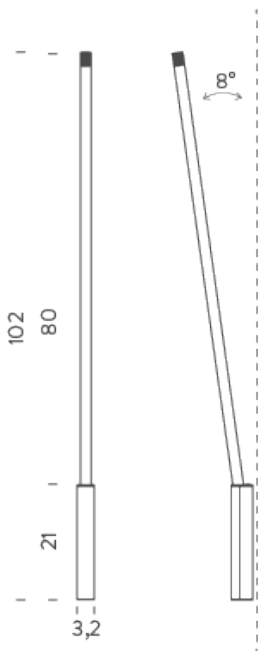

MINIFLUX LINEA WALL

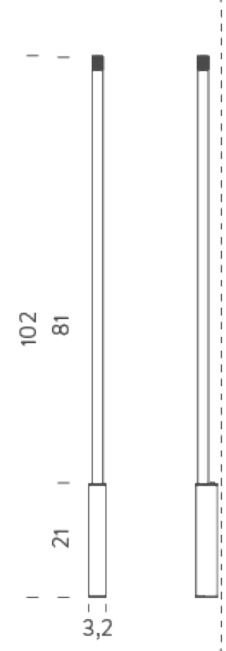

# WALL | 2700K

## LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	2700K
Luminous flux	681lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

Customization options  
Net lamp weight

## Codes

BMLA3908026DAN

## PACKAGE

Package 01

## Certificazioni




LED strip
12W
direct
push-button
24V
2700K
681lm
57lm/W
SDCM<3
>97
40
102xø3,2cm
polycarbonate
-20°C / +35°C
25°C
IK08
wall support with integrated driver and dimmable
push button included   driver included   RAL 9005
black
tube length   external electrical cable
0,6 kg

## Structure


black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

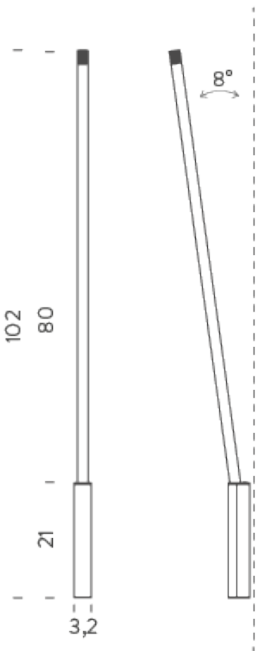

MINIFLUX LINEA WALL

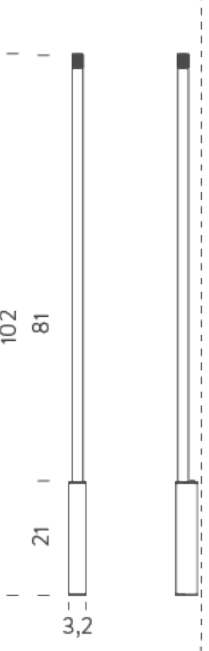

# WALL | 3000K

## LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	3000K
Luminous flux	717lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	wall support with integrated driver and dimmable push button included   driver included   RAL 9005 black

Customization options  
Net lamp weight

LED strip
12W
direct
push-button
24V
3000K
717lm
60lm/W
SDCM<3
>97
40
102xø3,2cm
polycarbonate
-20°C / +35°C
25°C
IK08
wall support with integrated driver and dimmable push button included   driver included   RAL 9005 black
tube length   external electrical cable
0,6 kg

## Codes

BMLA3908026WAN

## Structure

black

## PACKAGE


Package 01

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

## Certificazioni



MINIFLUX LINEA WALL 8°

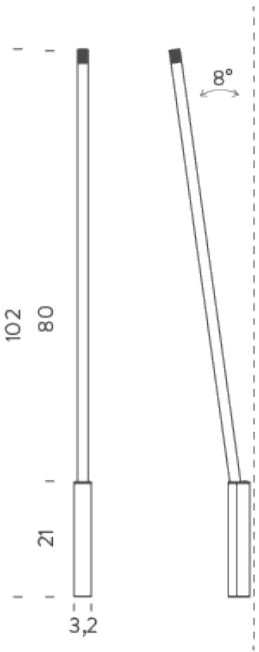

MINIFLUX LINEA WALL

