

POP UP

Pop Up is a round adjustable recessed spot for accent lighting. Available in the finishes black and white.



2700K

LAMPING

Source	1x LED COB
Total power	10W
Emission	direct adjustable 38°
Switching	according to driver
Tension	max 270mA
Color temperature	2700K
Luminous flux	630lm
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	G
IP class	20
Dimensions	D100 x 109mm
Ambient temperature range	35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	driver not included, orientable spot, recessed hole Ø90mm, cable length 0,3m
Net lamp weight	0.5 kg


Codes

MPOP0101758DNE
MPOP0101758DBO

Structure

black
white

Certificazioni

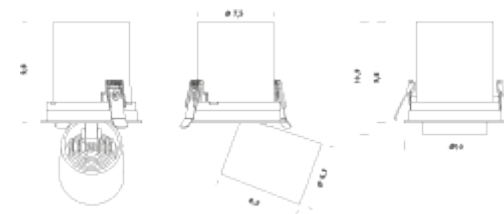

3000K

LAMPING

Source	1x LED COB
Total power	10W
Emission	direct adjustable 38°
Switching	according to driver
Tension	max 270mA
Color temperature	3000K
Luminous flux	700lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	G
IP class	20
Dimensions	D100 x 109mm
Ambient temperature range	35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK04
Notes	driver not included, orientable spot, recessed hole Ø90mm, cable length 0,3m
Net lamp weight	0.5 kg

Codes

MPOP0101758WNE
MPOP0101758WBO

Structure

black
white

Certificazioni

