


CUCÙ

Cucù is an adjustable recessed spot for indoor lighting.

Available in the finishes sand black and sand white.

Available with a round or square frame.



ROUND | 2700K

LAMPING

Source	1x LED COB
Total power	6W
Emission	direct adjustable 38°
Switching	according to driver
Tension	150mA
Color temperature	2700K
Luminous flux	450lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	ø8,5x8cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK03
Notes	driver not included, orientable spot, trimless recessed hole Ø 60mm, cable length 0,25m

Net lamp weight

1x LED COB
6W
direct adjustable 38°
according to driver
150mA
2700K
450lm
75lm/W
SDCM<3
90
F
20
ø8,5x8cm
aluminium
0°C / +35°C
25°C
IK03

driver not included, orientable spot, trimless
recessed hole Ø 60mm, cable length 0,25m
0,15 kg

Codes

MCUR2101759DNE
MCUR2101759DBO

Structure


black
white

PACKAGE

Package 01

Dimension: 0,23 cm / Gross weight: 13x12x10,5 kg

Certificazioni

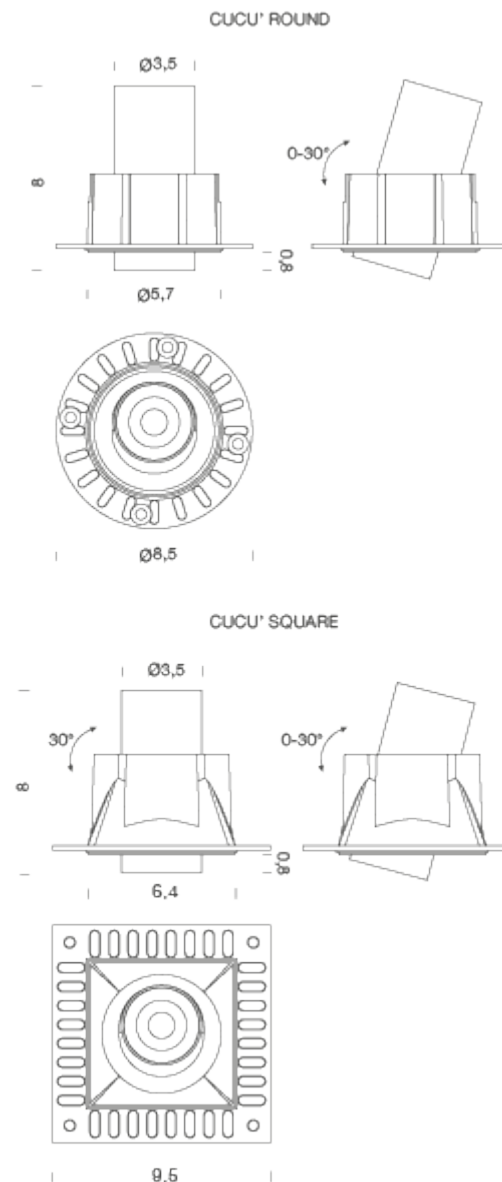

ROUND | 3000K

LAMPING

Source	1x LED COB
Total power	6W
Emission	direct adjustable 38°
Switching	according to driver
Tension	150mA
Color temperature	3000K
Luminous flux	480lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	ø8,5x8cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK03
Notes	driver not included, orientable spot, trimless recessed hole Ø 60mm, cable length 0,25m

Net lamp weight

0,15 kg

Codes

MCUR2101759WNE
MCUR2101759WBO

Structure

black
white

PACKAGE


Package 01

Dimension: 13x12x10,5 cm / Gross weight: 0,23 kg


Certificazioni



CUCU' ROUND

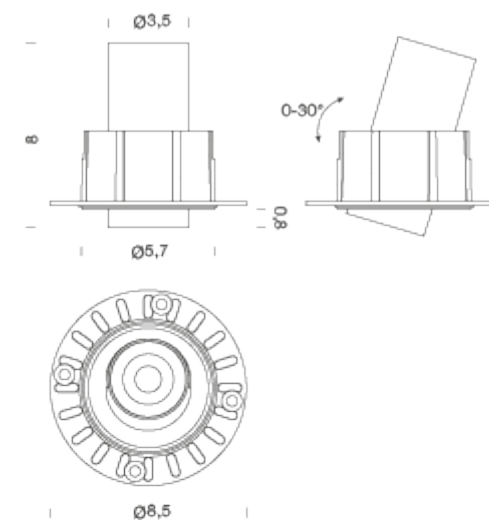

CUCU' SQUARE

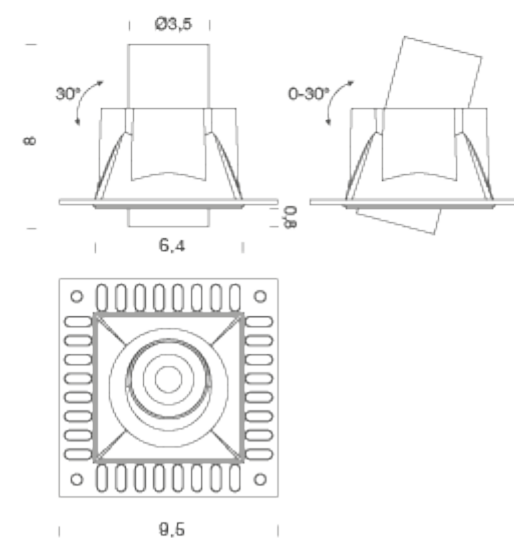

SQUARE | 2700K

LAMPING

Source	1x LED COB
Total power	6W
Emission	direct adjustable 38°
Switching	according to driver
Tension	150mA
Color temperature	2700K
Luminous flux	450lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	9,5x3,5x8cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK03
Notes	driver not included, orientable spot, trimless recessed hole Ø 60mm, cable length 0,25m

Net lamp weight

Codes

MCUS2101759DNE
MCUS2101759DBO

Structure


black
white

PACKAGE

Package 01

Dimension: 13x12x10,5 cm / Gross weight: 0,23 kg

Certificazioni

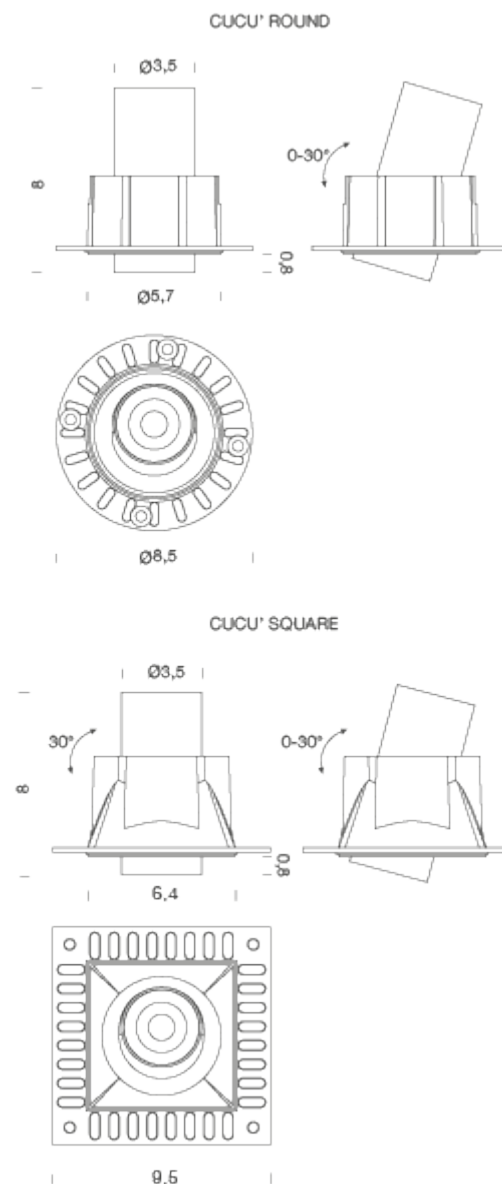

SQUARE | 3000K

LAMPING

Source	1x LED COB
Total power	6W
Emission	direct adjustable 38°
Switching	according to driver
Tension	150mA
Color temperature	3000K
Luminous flux	480lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	9,5x3,5x8cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK03
Notes	driver not included, orientable spot, trimless recessed hole Ø 60mm, cable length 0,25m

Net lamp weight

1x LED COB

6W

direct adjustable 38°

according to driver

150mA

3000K

480lm

80lm/W

SDCM<3

90

F

20

9,5x3,5x8cm

aluminium

0°C / +35°C

25°C

IK03

driver not included, orientable spot, trimless

recessed hole Ø 60mm, cable length 0,25m

0,15 kg

Codes

MCUS2101759WNE

MCUS2101759WBO

Structure

black

white

PACKAGE

Package 01

Dimension: 13x12x10,5 cm / Gross weight: 0,23 kg

Certificazioni

