

# MINIFLUX LINEA WALL-C OPAL

Miniflux Linea Wall-C is a wall-mounted LED system for indoor. High-emission LED strip (24V DC) installed on a black aluminium profile. CRI>97. Opal polycarbonate, adjustable light source. Available in two color temperatures.



2700K

#### LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	2700K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included   2 x clip included
Customization options	tube length   indirect light direction   external electrical cable
Net lamp weight	0,4 kg

#### Codes

BMLC4010G26DAN  
BMLC4010G26DAR  
BMLC4010G26DAO

#### Structure

black  
red  
gold

#### PACKAGE


Package 01

Dimension: 120x8x4 cm / Gross weight: 0,4 kg

#### Certificazioni



#### MINIFLUX LINEA WALL - C opal

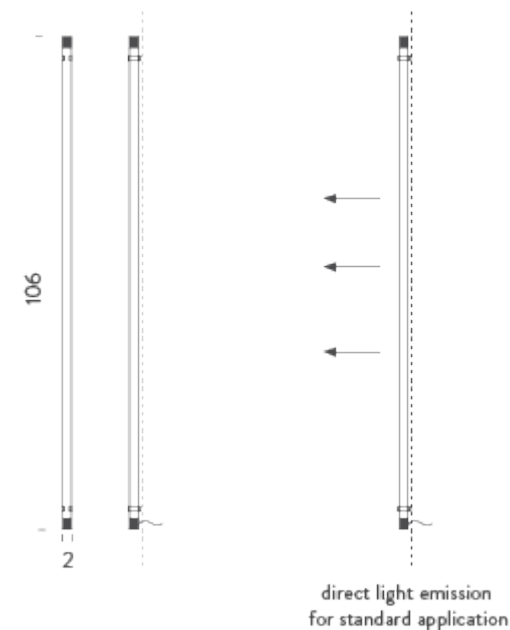

3000K

## LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V
Color temperature	3000K
Luminous flux	905lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	106xø2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Notes	driver not included   2 x clip included
Customization options	tube length   indirect light direction   external electrical cable
Net lamp weight	0,4 kg

## Codes

BMLC4010G26WAN  
BMLC4010G26WAR  
BMLC4010G26WAO

## Structure

black  
red  
gold

## PACKAGE

## Package 01

Dimension: 120x8x4 cm / Gross weight: 0,4 kg

## Certificazioni

