


# SLACKLINE IP67

Slackline family expands with the IP67 version dedicated to outdoor accent and signaling lighting. Characterized by an essential design and the opal resin coating of the LED ribbon that guarantees the indicated IP rating, it is offered in different lengths and with two color temperatures.

Slackline IP67 is the ideal product for continuous line solutions for outdoor projects or environments requiring a higher degree of protection. Ceiling mounting via brackets included.

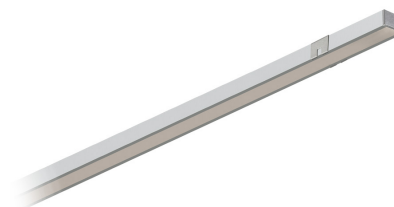

1M | 3000K

### LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	457lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	101x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included   cable length 0,5m
Customization options	CCT 2700K, body length   recessed, suspended, wall version

### Codes

BSLAS810G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm

### Certificazioni



SLACKLINE IP67

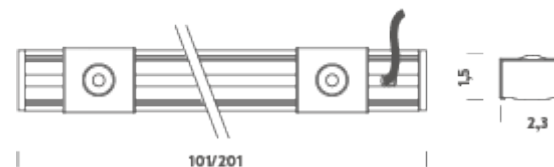

1M | 4000K

### LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	540lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	101x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included   cable length 0,5m
Customization options	CCT 2700K, body length   recessed, suspended, wall version

### Codes

BSLAS810G26NAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 105x11x2,5 cm

### Certificazioni



SLACKLINE IP67

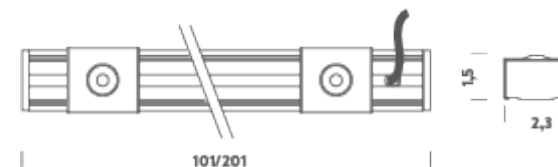

2M | 3000K

### LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	914lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	201x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included   cable length 0,5m
Customization options	CCT 2700K, body length   recessed, suspended, wall version

### Codes

BSLAS820G26WAA

### Structure

grey

### PACKAGE


Package 01

Dimension: 205x11x2,5 cm

### Certificazioni



SLACKLINE IP67

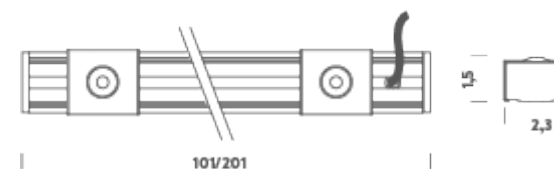

2M | 4000K

### LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1080lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	67
Dimensions	201x2,3x1,5cm
Materials	aluminium
Performance ambient temperature	25°C
Notes	driver not included   cable length 0,5m
Customization options	CCT 2700K, body length   recessed, suspended, wall version

### Codes

BSLAS820G26NAA

### Structure

grey

### PACKAGE

Package 01

Dimension: 205x11x2,5 cm

### Certificazioni



SLACKLINE IP67

