


LUX WALKWAY

Spot LED encastré pour extérieurs adapté pour un éclairage de balisage et décoratif. Corps en laiton chromé satiné. 1 LED à haut rendement, doté d'une lentille asymétrique, verre de protection et presse-étoupe.

Installation à l'aide du pot d'encastrement en plastique LUXCASSA1 (non inclus) ou à l'aide des ressorts en acier (inclus)



3000K

LAMPING

Source	LED
Total power	1,2W
Emission	Asymmetric
Switching	according to driver
Tension	350mA
Color temperature	3000K
Luminous flux	10lm
Initial luminaire efficacy	<10lm/W
Initial chromaticity	SDCM < 3
Typ CRI	70
IP class	65
Dimensions	Ø4,4x5,0cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, cable length 1m, series connection
Customization options	CCT 2700K
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,22 kg

Codes

BLUX0201217WCS

Structure


grey

PACKAGE

Package 01

Dimension: 15x11x5 cm / Gross weight: 0,22 kg

Certificazioni

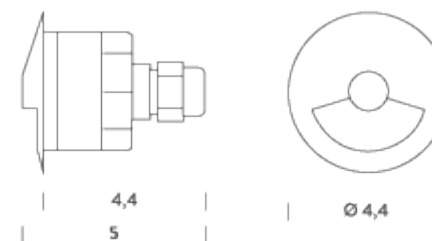

5000K

LAMPING

Source	LED
Total power	1,2W
Emission	Asymmetric
Switching	according to driver
Tension	350mA
Color temperature	5000K
Luminous flux	12lm
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	65
Dimensions	Ø4,4x5,0cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	driver not included, cable length 1m, series connection
Customization options	CCT 2700K
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,22 kg

Codes

BLUX02012170CS

Structure

grey

PACKAGE

Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni

