


# SLACKLINE MICRO

La famille SLACKLINE est composé d'une ample sélection de profilés en aluminium avec différents types de fixation, dotés de la même source lumineuse: Slackline Trim, Slackline Regular et Slackline Micro. Ces caractéristiques rendent l'utilisation du Slackline très flexible pour chaque contexte. Design minimal et grande qualité de la lumière. Slackline représente la solution idéale pour réaliser une ligne continue (sur demande). Selon le type de montage, diverses longueurs standard sont disponibles et avec un IRC>94.

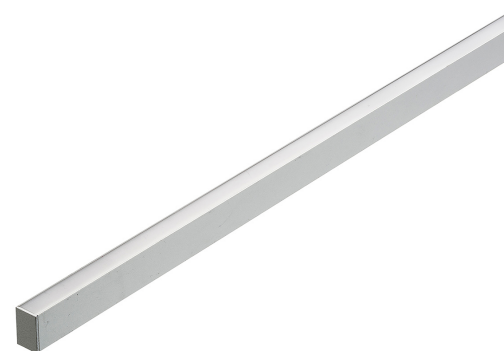

## 1M - 3000K

---

### LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	457lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x98,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,2 kg

### Codes

BSLM0410G65WAA

### Structure

grey

### PACKAGE

Package 01

Dimension: 100x5x5 cm / Gross weight: 0,2 kg

### Certificazioni



## 1M - 4000K

---



### LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	540lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x98,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,2 kg

### Codes

BSLM0410G65NAA

### Structure

grey

### PACKAGE

Package 01

Dimension: 100x5x5 cm / Gross weight: 0,2 kg

### Certificazioni



## 2M - 3000K

---



### LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	914lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x198,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,4 kg

### Codes

BSLM0420G65WAA

### Structure

grey

### PACKAGE

Package 01

Dimension: 200x5x5 cm / Gross weight: 0,4 kg

### Certificazioni



## 2M - 4000K

---



### LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1080lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x198,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,4 kg

### Codes

BSLM0420G65NAA

### Structure

grey

### PACKAGE

Package 01

Dimension: 200x5x5 cm / Gross weight: 0,4 kg

### Certificazioni



## 3M | 3000K



### LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1377lm
Initial luminaire efficacy	31lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	1,5x1x298,5cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

### Codes

BSLM0430G65WAA

### Structure

grey

### PACKAGE

Package 01

Dimension: 300x5x5 cm / Gross weight: 0,60 kg

### Certificazioni



3M | 4000K



### LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4000K
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	1,5x1x298,5cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,6 kg

### Codes

BSLM0430G65NAA

### Structure

grey

### PACKAGE

Package 01

Dimension: 300x5x5 cm / Gross weight: 0,6 kg

### Certificazioni

