

WALKLINE

WALKLINE est un système d'éclairage à LED pour extérieurs et piétonnable et carrossable. Il est composé d'un profilé en aluminium naturel et une surface en résine opale pour une diffusion homogène de la lumière. Walkline est disponible en différentes longueurs. Il est dimmable 1-10V, DALI ou DMX. L'installation est réalisée à l'aide d'un boîtier d'encastrement au sol (inclus).



0,50M | 4000K

LAMPING

Source	LED strip
Total power	7,5W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	325lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	50,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,75 kg

Codes

BWLK0205G26NAA


Structure

grey

PACKAGE

Package 01 Dimension: 52x3x9 cm / Gross weight: 1,75 kg

Certificazioni

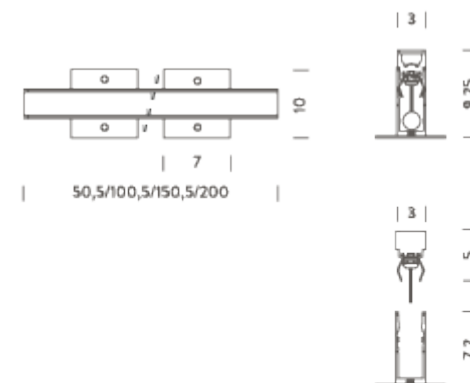

0,50M | 6000K

LAMPING

Source	LED strip
Total power	7,5W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	6000K
Luminous flux	325lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	50,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	1,75 kg

Codes

BWLK0205G260AA

PACKAGE

Package 01


Certificazioni



Structure

grey

Dimension: 52x3x9 cm / Gross weight: 1,75 kg

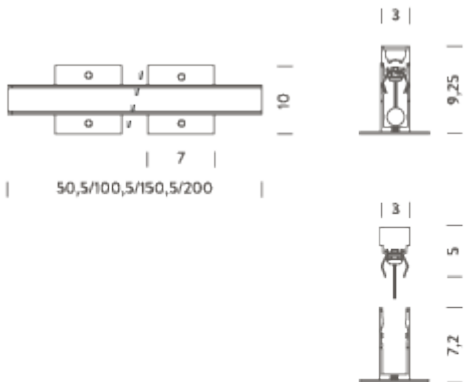

1M | 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	650lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	100,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,5 kg

Codes

BWLK0210G26NAA


Structure

grey

PACKAGE

Package 01 Dimension: 103x3x9 cm / Gross weight: 3,5 kg

Certificazioni

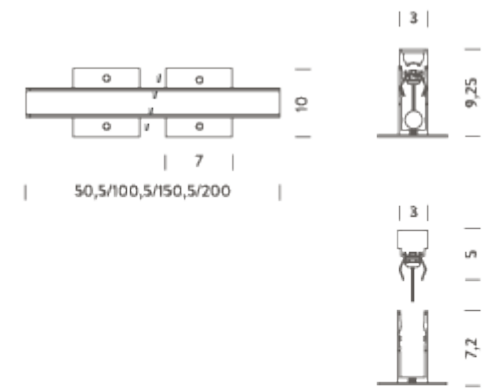

1M | 6000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	6000K
Luminous flux	650lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	100,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20° / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	3,5 kg

Codes

BWLK0210G260AA

Structure


grey

PACKAGE

Package 01

Dimension: 103x3x9 cm / Gross weight: 3,5 kg

Certificazioni

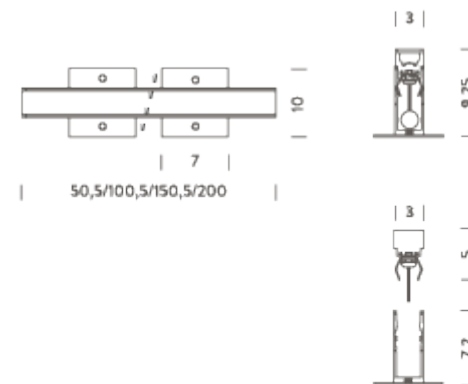

1,5M | 4000K

LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	975lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	150,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	5,25 kg

Codes

BWLK0215G26NAA

Structure


grey

PACKAGE

Package 01

Dimension: 152x3x9 cm / Gross weight: 5,25 kg

Certificazioni

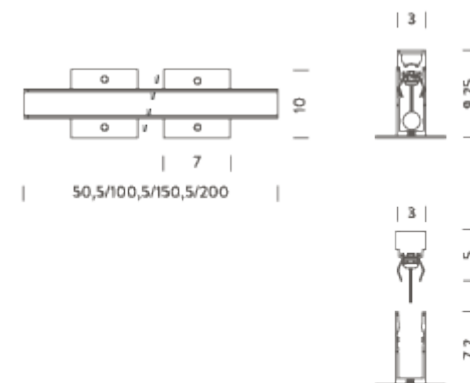

1,5M | 6000K

LAMPING

Source	LED strip
Total power	22,5W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	6000K
Luminous flux	975lm
Initial luminaire efficacy	430lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	150,5x3x9,25cm
Materials	anodized aluminum
Ambient temperature range	- 20° / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	5,25 kg

Codes

BWLK0215G260AA


Structure

grey

PACKAGE

Package 01 Dimension: 152x3x9 cm / Gross weight: 5,25 kg

Certificazioni

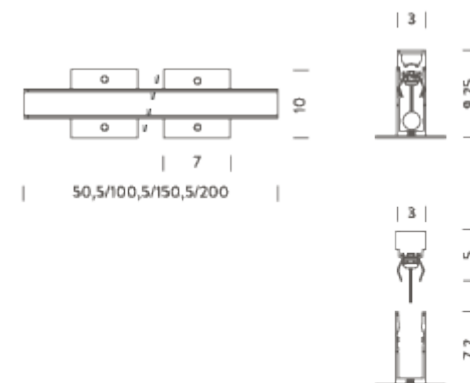

2M | 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1300lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	200x3x9,25cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	7 kg

Codes

BWLK0220G26NAA


Structure

grey

PACKAGE

Package 01 Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

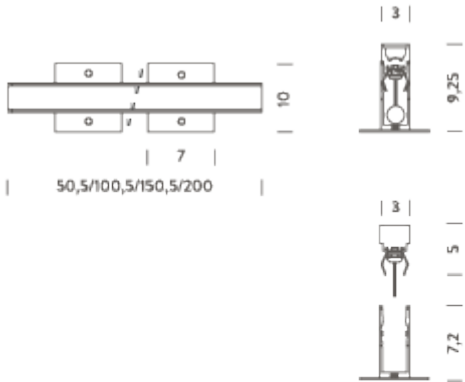

2M | 6000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	6000K
Luminous flux	1300lm
Initial luminaire efficacy	43lm/W
Initial chromaticity	SDCM < 3
Typ CRI	90
IP class	67
Dimensions	200x3x9,25cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, 1-10V, DALI, DMX, Casambi, cable length 1m, certified 500kg static load, 3500kg dynamic load
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	7 kg

Codes

BWLK0220G260AA

Structure

grey

PACKAGE

Package 01 Dimension: 200x3x9 cm / Gross weight: 7 kg

Certificazioni

