

# RIGA OPAL

RIGA est une famille de produits qui comprend une sélection de rubans LED flexibles pour extérieurs, particulièrement adaptée pour un éclairage décoratif. Riga est composé d'un ruban LED à 24V gainé dans un profilé en PVC blanc et encapsulé dans une résine polyuréthane opale, extrêmement résistant aux agents atmosphériques et avec un excellent degré de stabilité si exposé aux rayons UV. La version de la résine opale permet une diffusion latérale ou de face de la lumière selon la possibilité de courbure du ruban LED. Riga est disponible dans différentes longueurs.



# 1M | 3000K - FRONT LIGHT

## LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

## Codes

MRIG0910G35WFL

## Structure


white

## PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

## Certificazioni

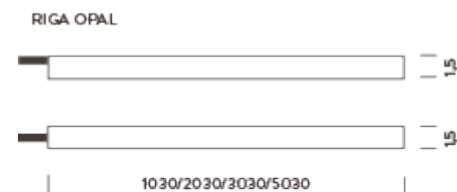

## BRACKETS (included)



# 1M | 3000K - SIDE LIGHT

## LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	510lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

## Codes

MRIG0910G35WSL


## Structure

white

## PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

## Certificazioni

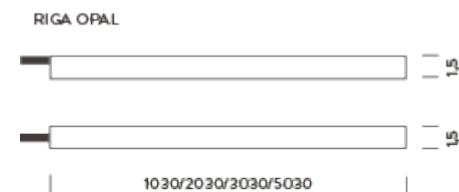

## BRACKETS (included)



# 1M | 4000K - FRONT LIGHT

## LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

## Codes

MRIG0910G35NFL


## Structure

white

## PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

## Certificazioni

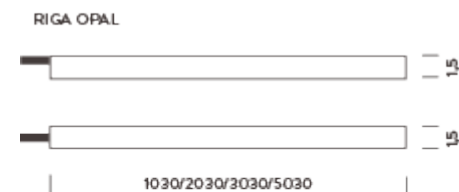

## BRACKETS (included)



## 1M | 4000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	9,6W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	600lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x100cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,39 kg

### Codes

MRIG0910G35NSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 0,99 kg

### Certificazioni

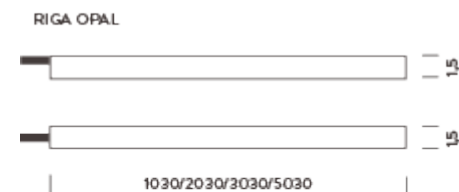

### BRACKETS (included)



## 2M | 3000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

### Codes

MRIG0920G35WFL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

### Certificazioni

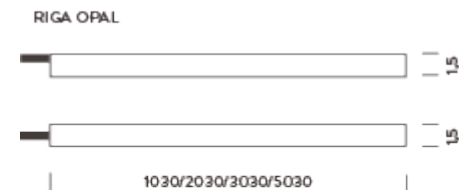

### BRACKETS (included)



## 2M | 3000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1020lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

### Codes

MRIG0920G35WSL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

### Certificazioni

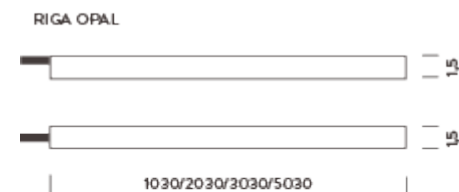

### BRACKETS (included)



## 2M | 4000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

### Codes

MRIG0920G35NFL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

### Certificazioni

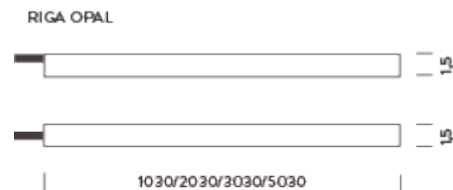

### BRACKETS (included)





## 2M | 4000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	19,2W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x200cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	0,86 kg

### Codes

MRIG0920G35NSL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,46 kg

### Certificazioni

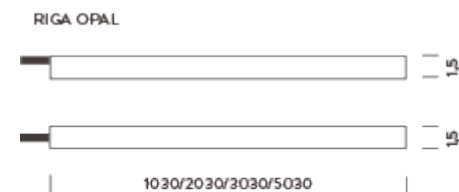

### BRACKETS (included)



## 3M | 3000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

### Codes

MRIG0930G35WFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

### Certificazioni

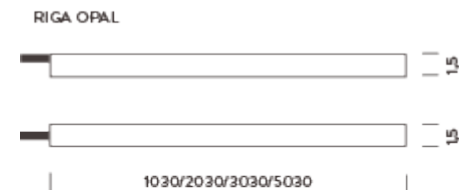

### BRACKETS (included)



## 3M | 3000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1530lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

### Codes

MRIG0930G35WSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

### Certificazioni

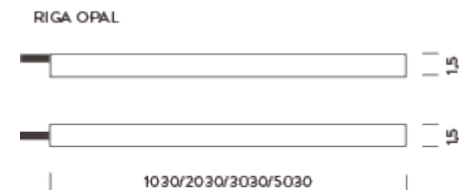

### BRACKETS (included)



## 3M | 4000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

### Codes

MRIG0930G35NFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

### Certificazioni

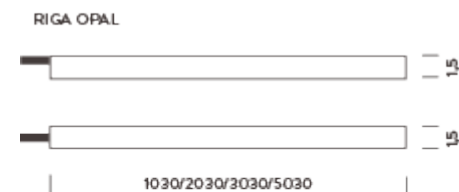

### BRACKETS (included)



## 3M | 4000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	28,8W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1800lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x300cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,3 kg

### Codes

MRIG0930G35NSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,51 kg

### Certificazioni

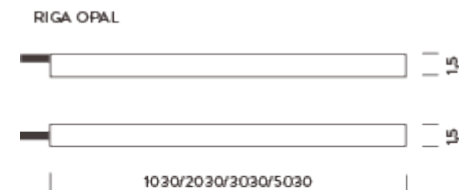

### BRACKETS (included)



## 4M | 3000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

### Codes

MRIG0940G35WFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

### Certificazioni

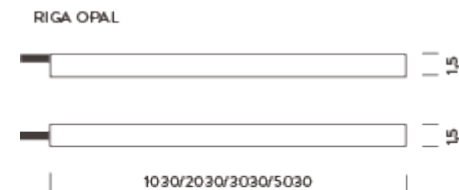

### BRACKETS (included)



## 4M | 3000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2040lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

### Codes

MRIG0940G35WSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

### Certificazioni

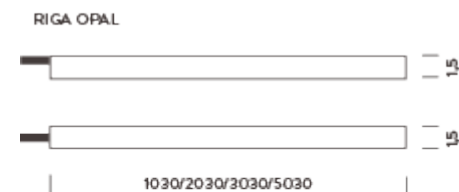

### BRACKETS (included)



## 4M | 4000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

### Codes

MRIG0940G35NFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

### Certificazioni

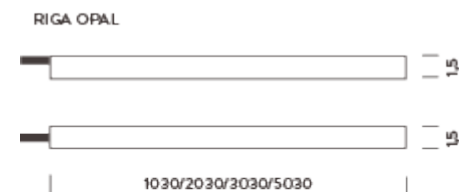

### BRACKETS (included)





## 4M | 4000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	38,4W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2400lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x400cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	1,73 kg

### Codes

MRIG0940G35NSL

### Structure


white

### PACKAGE

Package 01

Dimension: 42x42x4,5 cm / Gross weight: 1,94 kg

### Certificazioni

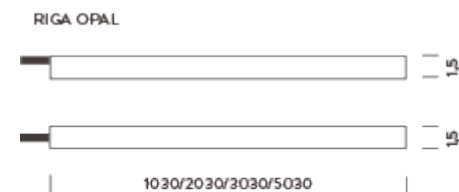

### BRACKETS (included)



## 5M | 3000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

### Codes

MRIG0950G35WFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

### Certificazioni

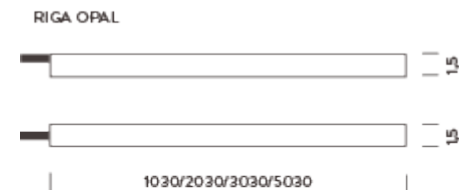

### BRACKETS (included)



## 5M | 3000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2550lm
Initial luminaire efficacy	53lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

### Codes

MRIG0950G35WSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

### Certificazioni

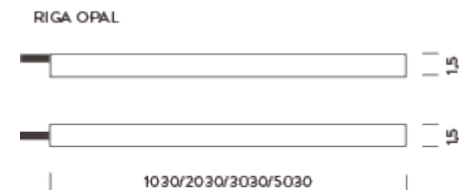

### BRACKETS (included)



## 5M | 4000K - FRONT LIGHT

### LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

### Codes

MRIG0950G35NFL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

### Certificazioni

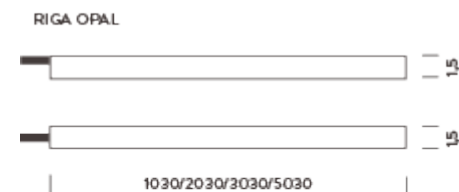

### BRACKETS (included)



## 5M | 4000K - SIDE LIGHT

### LAMPING

Source	Flexible LED strip
Total power	48W
Emission	diffused orientable
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3000lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM <3
Typ CRI	85
IP class	68
Dimensions	1,5x1,5x500cm
Materials	resin + PVC
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK10
Notes	driver not included, cable length 2m
Customization options	body length, CCT 2700K
Accessories	Connectors kit IP68,   Drivers 24VDC + DALI interface,
Net lamp weight	2,16 kg

### Codes

MRIG0950G35NSL


### Structure

white

### PACKAGE

Package 01 Dimension: 42x42x4,5 cm / Gross weight: 2,37 kg

### Certificazioni

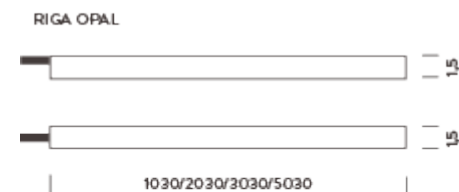

### BRACKETS (included)

