

CAPRI

Familie von Innenstrahlern für Akzentbeleuchtung.

Die Leuchte kann um 90° vertikal und um 355° horizontal rotiert werden, um die Beleuchtung in jede beliebige Ausrichtung zu lenken.

Die Wärmeableitungsstruktur und der eingebaute Driver sind miteinander kombiniert.

Kompakte und minimalistische Ästhetik, der frei einstellbare Abstrahlwinkel erfüllt alle Beleuchtungsanforderungen.



DIMMABLE TRIAC | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable triac
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW2 81
CAP LN2 81

Structure

white
black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

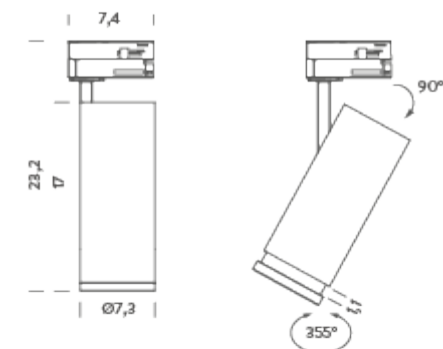

CAPRI 0-10V/DALI

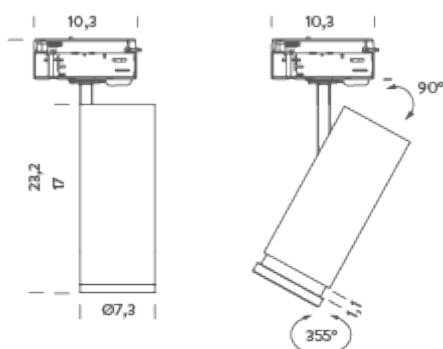

CAPRI DOB

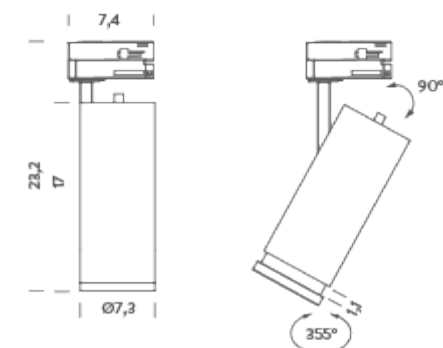

DIMMABLE TRIAC | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable triac
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW3 81
CAP LN3 81

Structure

white
black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

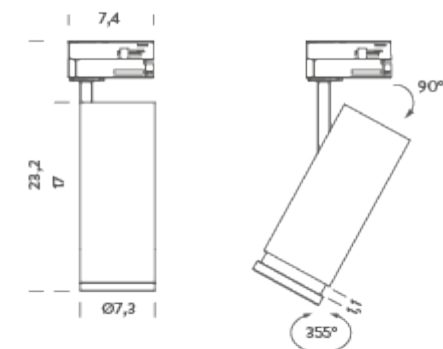

CAPRI 0-10V/DALI

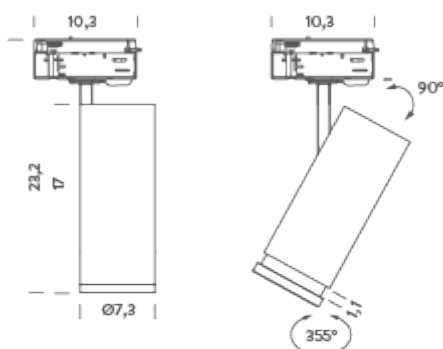

CAPRI DOB

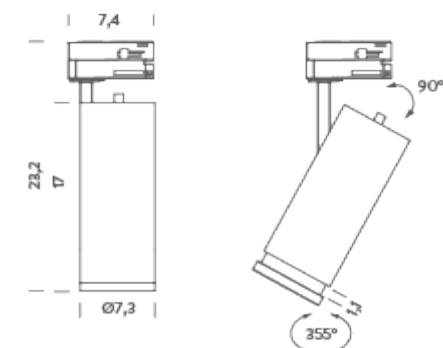

DIMMABLE 0-10V | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable 0-10V
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW2 82
CAP LN2 82

Structure

white
black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

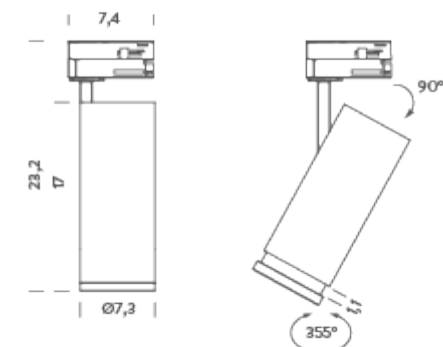

CAPRI 0-10V/DALI

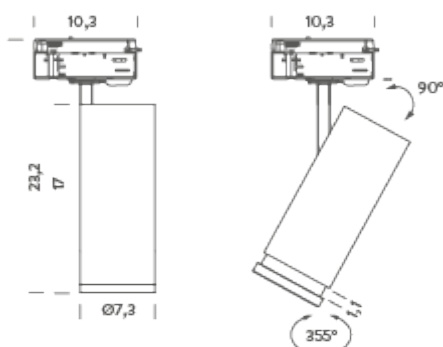

CAPRI DOB

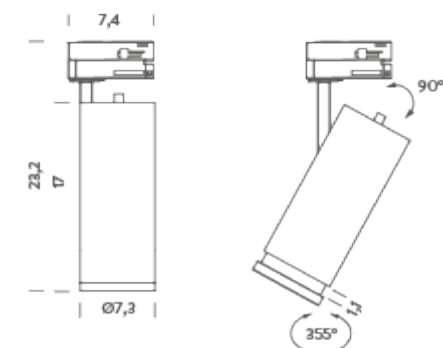

DIMMABLE 0-10V | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable 0-10V
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW3 82
CAP LN3 82

Structure

white
black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

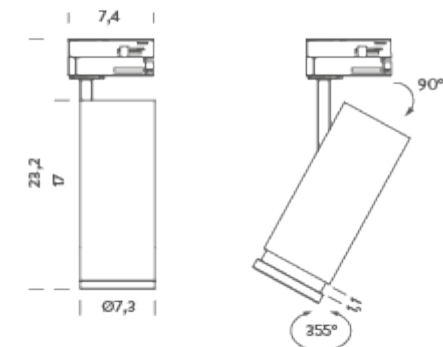

CAPRI 0-10V/DALI

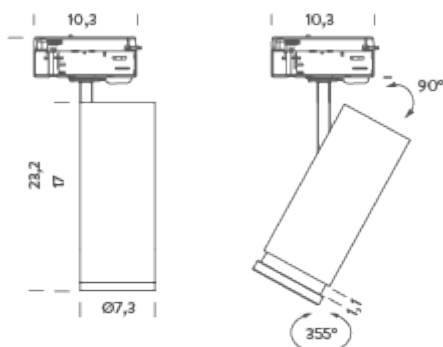

CAPRI DOB

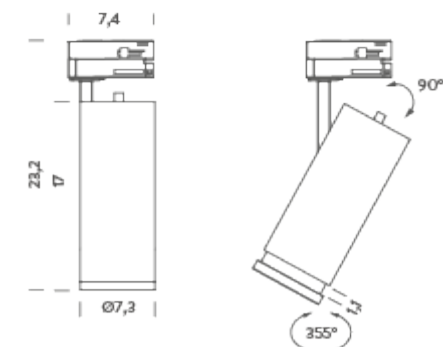

DIMMABLE DALI | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable DALI
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW2 83

CAP LN2 83

Structure

white

black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

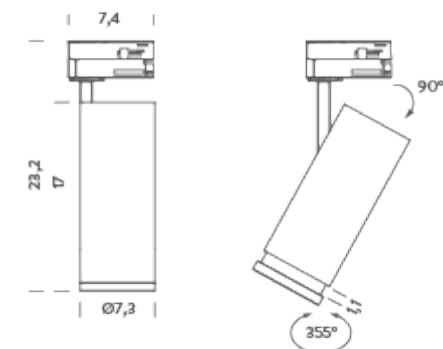

CAPRI 0-10V/DALI

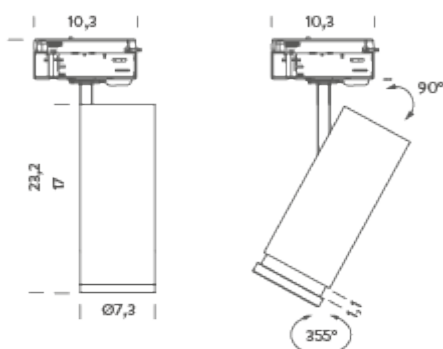

CAPRI DOB

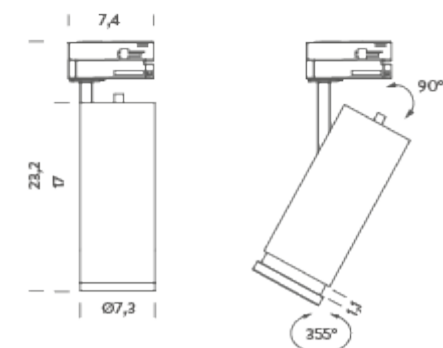

DIMMABLE DALI | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	Dimmable DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LW3 83
CAP LN3 83

Structure

white
black

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni




CAPRI TRIAC/CASAMBI

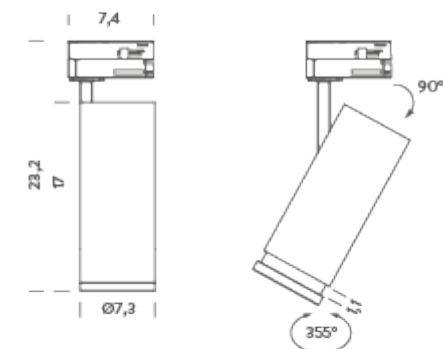

CAPRI 0-10V/DALI

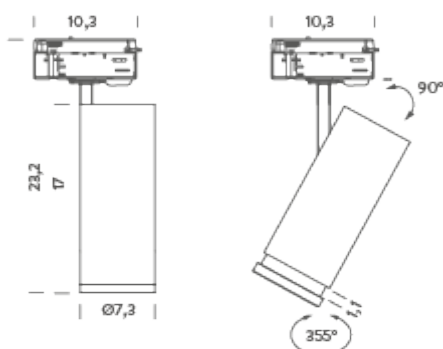

CAPRI DOB

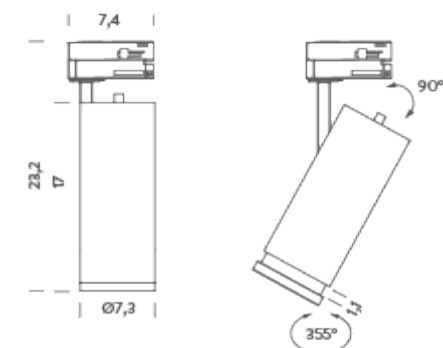

DIMMER ON BOARD 1-10V | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°55°
Switching	dimmer on board
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAPLN2 84
CAP LW2 84

Structure

black
white

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni

UK
CA


CAPRI TRIAC/CASAMBI

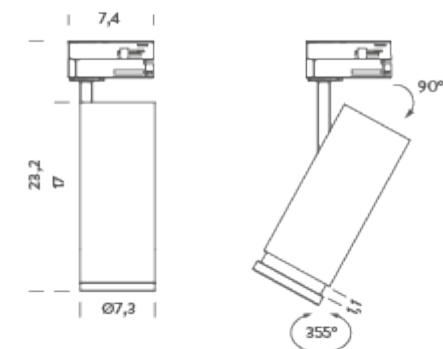

CAPRI 0-10V/DALI

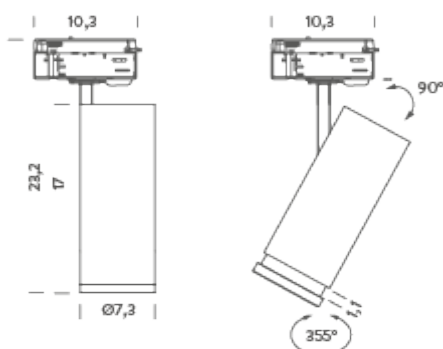

CAPRI DOB

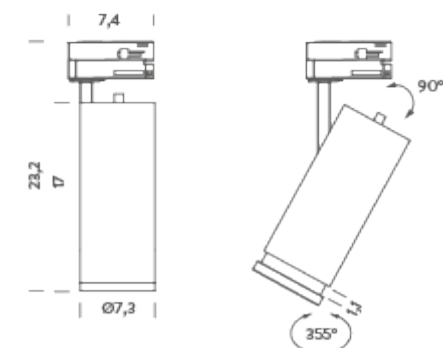

DIMMER ON BOARD 1-10V | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmer on board
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LN3 84
CAP LW3 84

Structure

black
white

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni

UK
CA


CAPRI TRIAC/CASAMBI

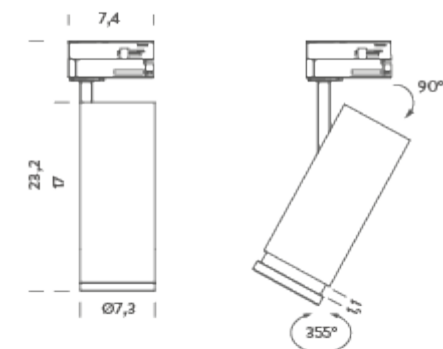

CAPRI 0-10V/DALI

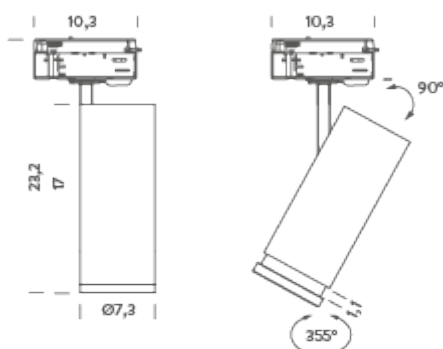

CAPRI DOB

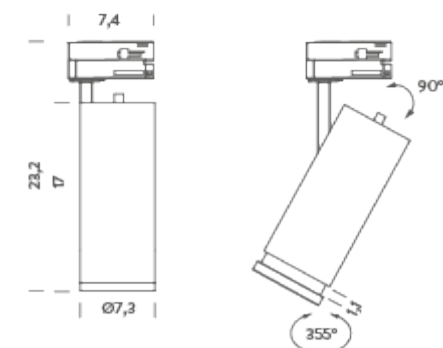

CASAMBI (BLUETOOTH) | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	CASAMBI (bluetooth)
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LN2 85
CAP LW2 85

Structure

black
white

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni

UK
CA


CAPRI TRIAC/CASAMBI

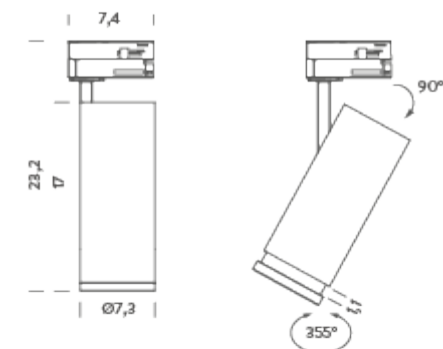

CAPRI 0-10V/DALI

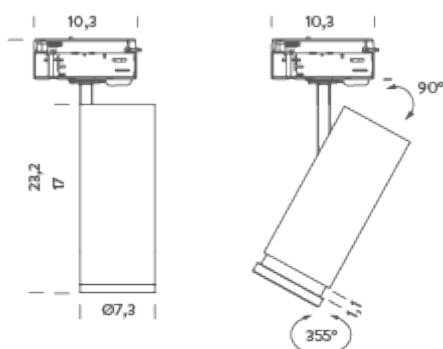

CAPRI DOB

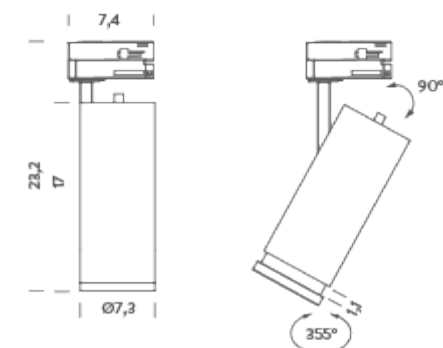

CASAMBI (BLUETOOTH) | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	CASAMBI (bluetooth)
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x17
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°, compatible with 3C/DALI-1/10V
Net lamp weight	1 kg

Codes

CAP LN3 85
CAP LW3 85

Structure

black
white

PACKAGE


Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg


Certificazioni

UK
CA

CAPRI TRIAC/CASAMBI

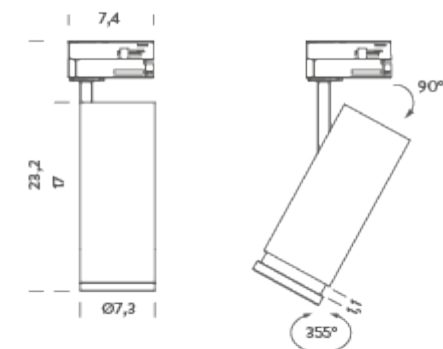

CAPRI 0-10V/DALI

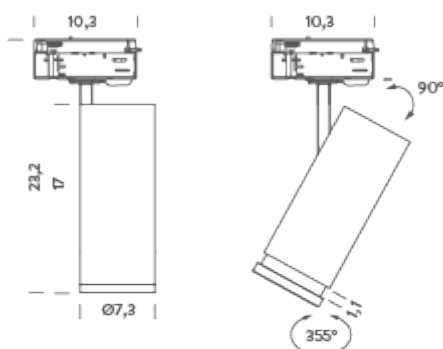

CAPRI DOB

