

CAPRI CEILING

Familie von Innenstrahlern für Akzentbeleuchtung.

Die Leuchte kann um 90° vertikal und um 355° horizontal rotiert werden, um die Beleuchtung in jede beliebige Ausrichtung zu lenken.

Die Wärmeableitungsstruktur und der eingebaute Driver sind miteinander kombiniert.

Kompakte und minimalistische Ästhetik, der frei einstellbare Abstrahlwinkel erfüllt alle Beleuchtungsanforderungen.



DIMMABLE TRIAC | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable TRIAC
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/w
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW2 41
CAP LN2 41

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

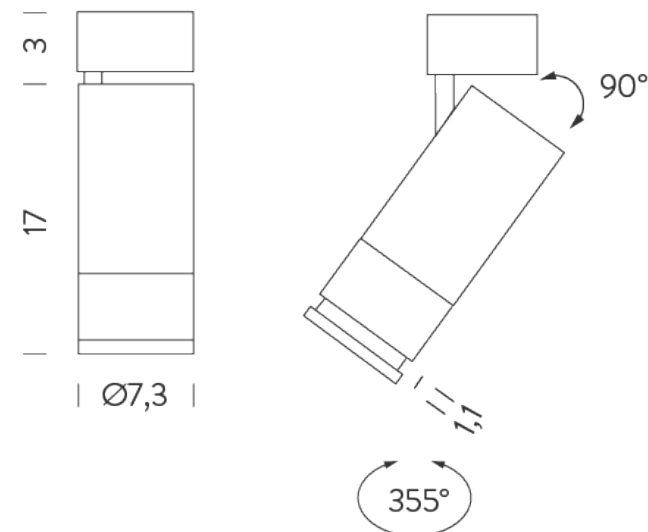

DIMMABLE TRIAC | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable TRIAC
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW3 41
CAP LN3 41

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

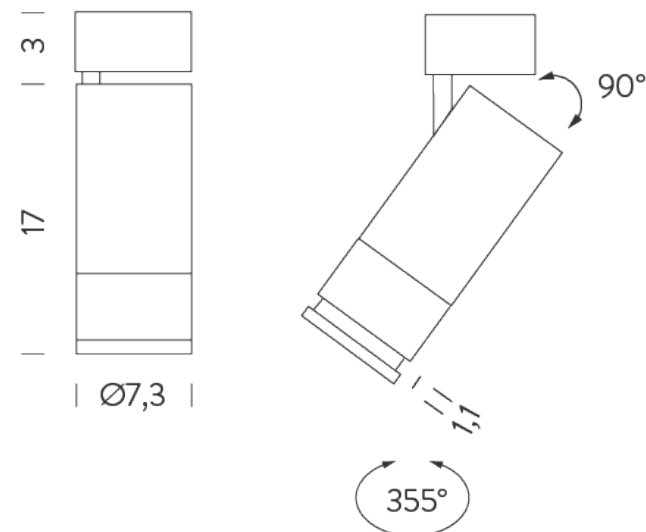

DIMMABLE 0-10V | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimnable 0-10V
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW2 42
CAP LN2 42

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

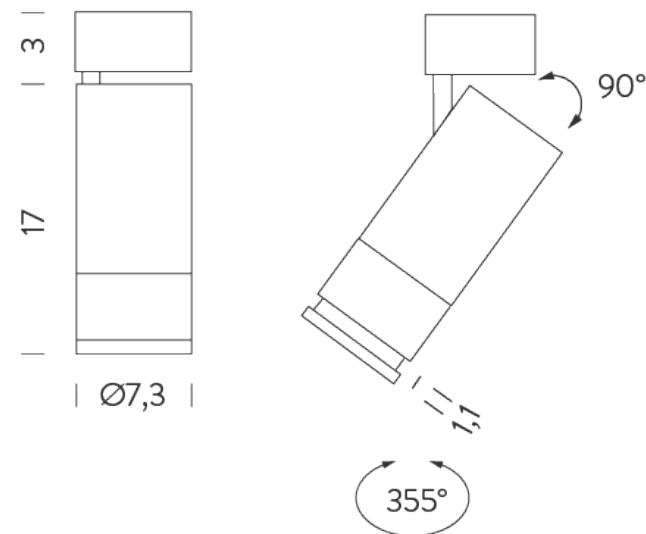

DIMMABLE 0-10V | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable 0-10V
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW3 42
CAP LN3 42

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

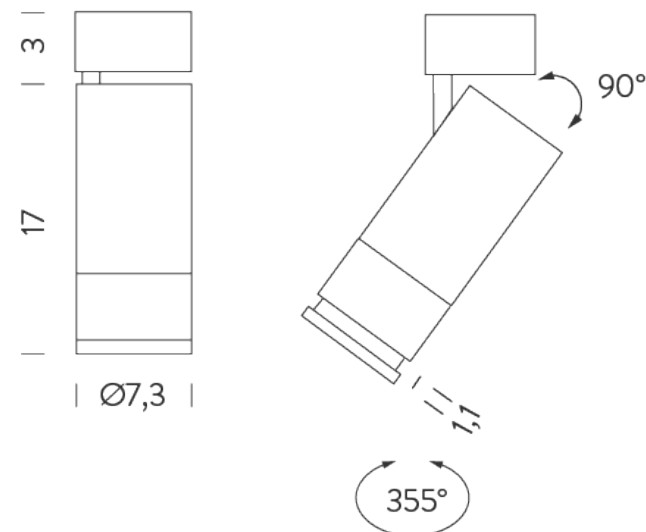

DIMMABLE DALI | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable DALI
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW2 43
CAP LN2 43

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

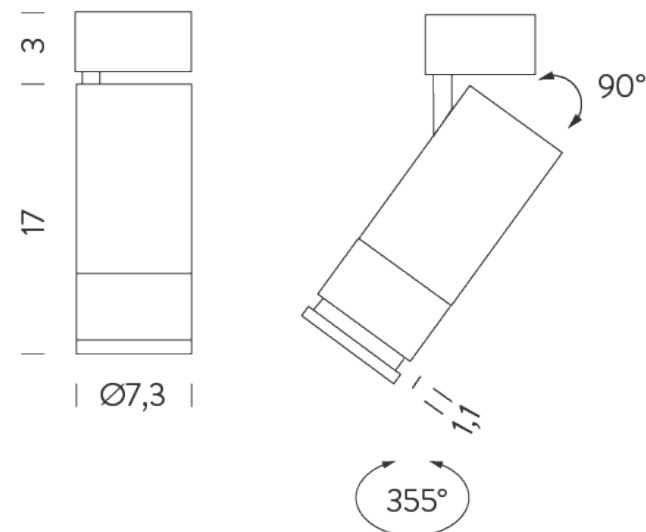

DIMMABLE DALI | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	dimmable DALI
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LW3 43
CAP LN3 43

Structure


white
black

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

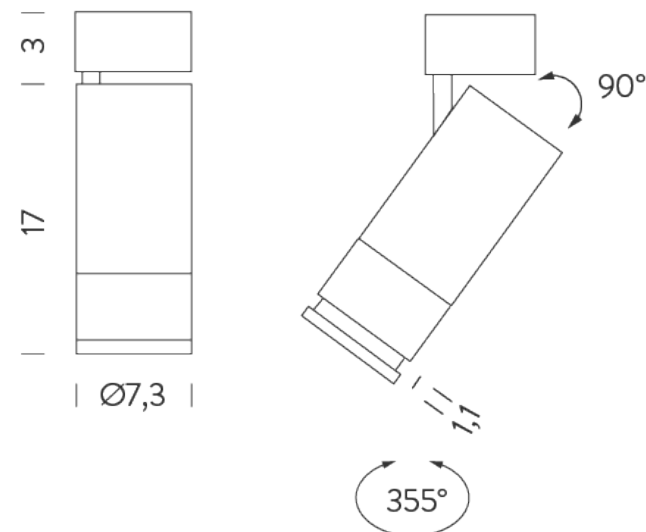

CASAMBI (BLUETOOTH) | 2700K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	CASAMBI (bluetooth)
Tension	220/240V
Color temperature	2700K
Luminous flux	1600lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LN2 45
CAP LW2 45

Structure


black
white

PACKAGE

Package 01

Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

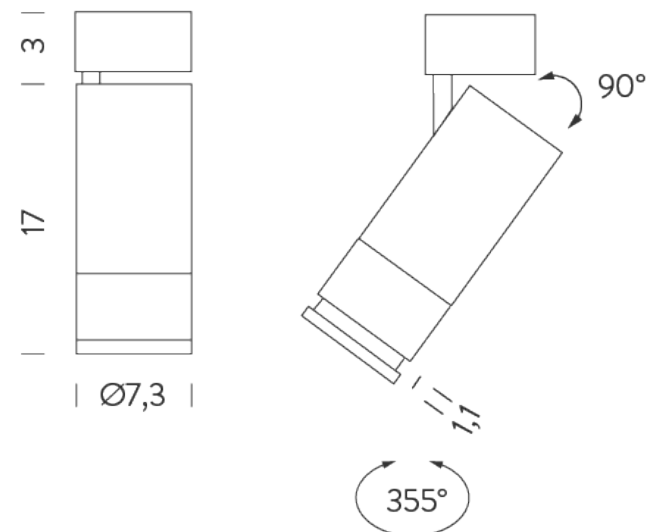

CASAMBI (BLUETOOTH) | 3000K

LAMPING

Source	1x LED COB
Total power	23W
Emission	direct adjustable 15°-55°
Switching	CASAMBI (bluetooth)
Tension	220/240V
Color temperature	3000K
Luminous flux	1780lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø7,3x20cm
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK02
Notes	driver on board, adjustable beam 15°-55°, rotating body 355°, orientable spot 90°
Net lamp weight	1 kg

Codes

CAP LN3 45
CAP LW3 45

Structure

black
white

PACKAGE

Package 01 Dimension: 23,5x19x8 cm / Gross weight: 1,2 kg

Certificazioni

