

ZIRKOL CEILING

Le purisme contemporain de la collection Zirkol s'étend maintenant au nouveau Zirkol Ceiling: pour la première fois, ILTI Luce propose une application au plafond du Zirkol Circle. Les bordures circulaires harmonieuses se confondent avec l'élément linéaire dissimulant le driver intégré à travers un boîtier magnétique. Disponible dans une variété de diamètres, Zirkol Ceiling répond aux besoins résidentiels et professionnels, évitant l'installation d'accessoires à distance.



Ø 0,85M | 2700K

LAMPING

Source	LED strip
Total power	35W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2000lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø85m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	integrated driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V) RAL 9005 black RAL 9016 white shipped assembled

Customization options
Net lamp weight

lumen output, finish
3 kg

Codes

BZRCD408G15DBO
BZRCD408G15DNE
BZRCD408G15DOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

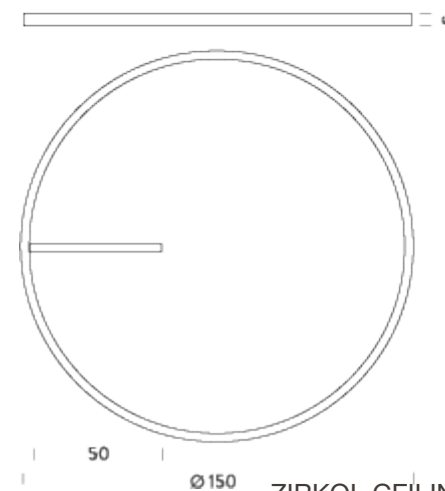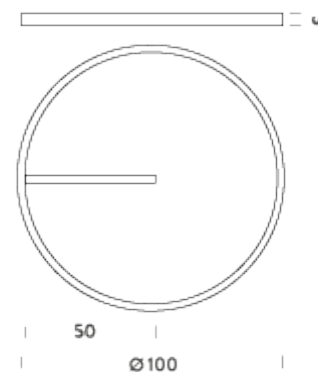

Ø 0,85M | 3000K

LAMPING

Source	LED strip
Total power	35W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2200lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø85m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options
Net lamp weight

integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
3 kg

Codes

BZRCD408G15WBO
BZRCD408G15WNE
BZRCD408G15WOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

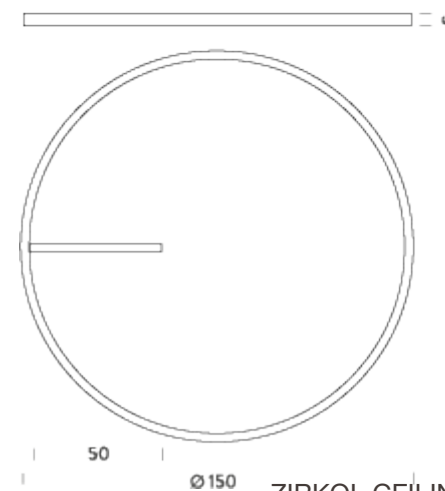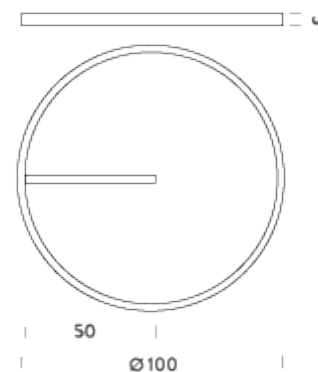

Ø 0,85M | 4000K

LAMPING

Source	LED strip
Total power	35W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	2360lm
Initial luminaire efficacy	67lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	ø85m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options
Net lamp weight

integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
3 kg

Codes

BZRCD408G15NBO
BZRCD408G15NNE
BZRCD408G15NOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 5,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

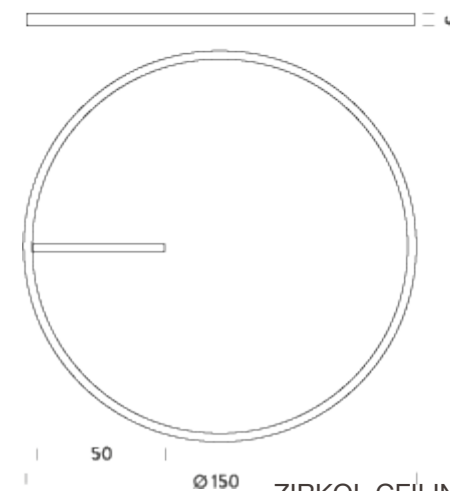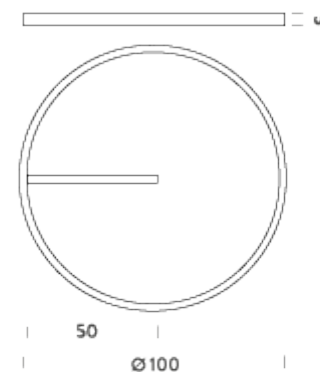

Ø 1M | 2700K

LAMPING

Source	LED strip
Total power	45W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	2616lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø 1m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	integrated driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V) RAL 9005 black RAL 9016 white shipped assembled

Customization options
Net lamp weight

lumen output, finish
4 kg

Codes

BZRCD410G15DBO
BZRCD410G15DNE
BZRCD410G15DOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1-1,5 M

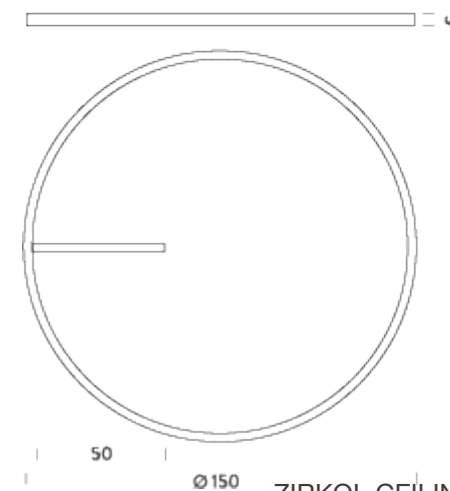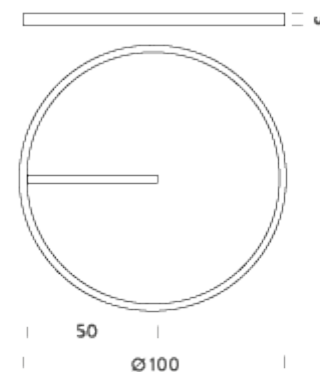

Ø 1M | 3000K

LAMPING

Source	LED strip
Total power	45W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	2769lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø 1m x 5cm
Materials	aluminimu
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	integrated driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V) RAL 9005 black RAL 9016 white shipped assembled

Customization options
Net lamp weight

lumen output, finish
4 kg

Codes

BZRCD410G15WBO
BZRCD410G15WNE
BZRCD410G15WOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1-1,5 M

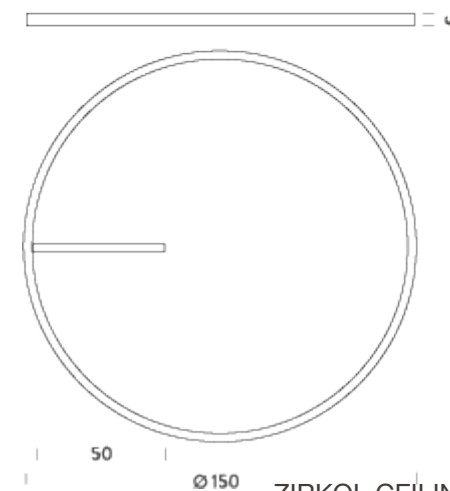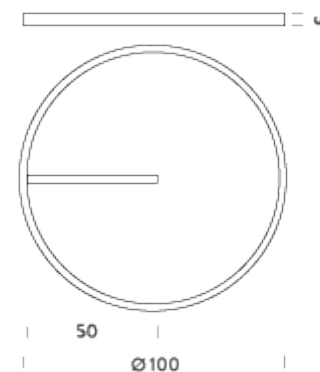

Ø 1M | 4000K

LAMPING

Source	LED strip
Total power	45W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	3077lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	Ø 1m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	integrated driver box with 1 x driver Superslim 60W Dali2/Push Dali (220/240V) RAL 9005 black RAL 9016 white shipped assembled

Customization options
Net lamp weight

lumen output, finish
4 kg

Codes

BZRCD410G15NBO
BZRCD410G15NNE
BZRCD410G15NOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg

Certificazioni



ZIRKOL CEILING 0,8-1-1,5 M

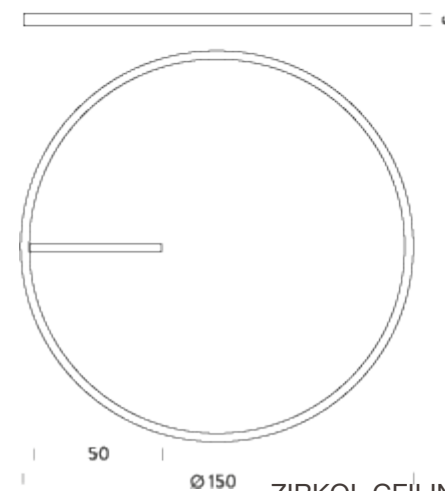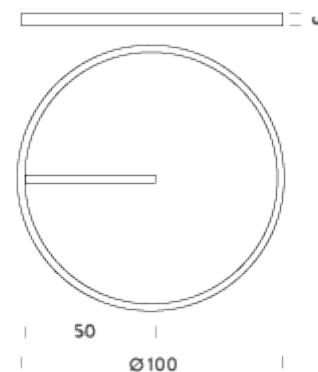

Ø 1,5M | 2700K

LAMPING

Source	LED strip
Total power	60W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	3923lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø 1,5m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options
Net lamp weight

integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
5,4 kg

Codes

BZRCD415G15DBO
BZRCD415G15DNE
BZRCD415G15DOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg

Certificazioni



ZIRKOL CEILING 0,8-1-1,5 M

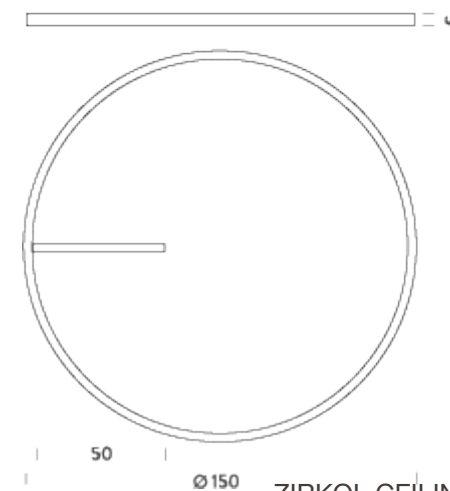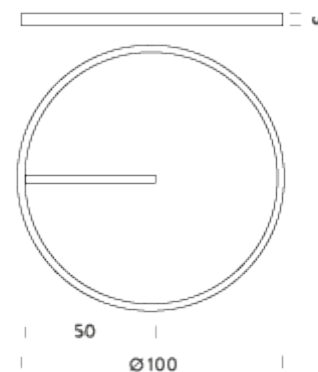

Ø 1,5M | 3000K

LAMPING

Source	LED strip
Total power	60W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	4154lm
Initial luminaire efficacy	69lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	Ø 1,5m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options
Net lamp weight

integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
5,4 kg

Codes

BZRCD415G15WBO
BZRCD415G15WNE
BZRCD415G15WOR

Structure

white
black
gold

PACKAGE




Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg

Certificazioni



ZIRKOL CEILING 0,8-1,5 M

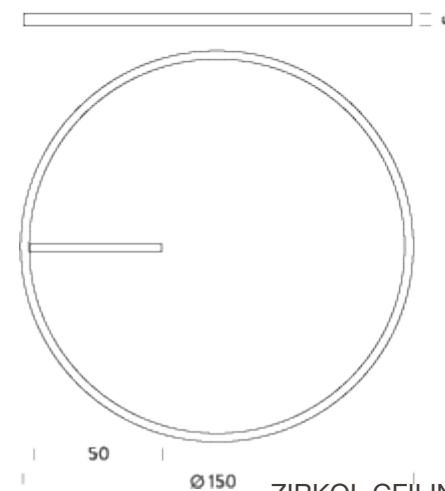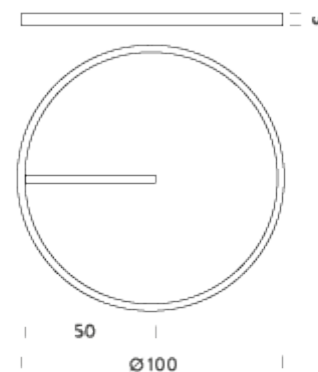

Ø 1,5M | 4000K

LAMPING

Source	LED strip
Total power	60W
Emission	Diffused
Switching	DALI
Tension	24V
Color temperature	4000K
Luminous flux	4616lm
Initial luminaire efficacy	77lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	D
IP class	40
Dimensions	Ø 1,5m x 5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

Customization options
Net lamp weight

integrated driver box with 1 x driver Superslim
60W Dali2/Push Dali (220/240V) | RAL 9005 black |
RAL 9016 white | shipped assembled
lumen output, finish
5,4 kg

Codes

BZRCD415G15NBO
BZRCD415G15NNE
BZRCD415G15NOR

Structure

white
black
gold

PACKAGE

Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg

Certificazioni



ZIRKOL CEILING 0,8-1-1,5 M

