

GRAVITY

GRAVITY est le nouveau système magnétique de la collection FLEX. Une galaxie d'éléments graphiques polyvalents et distinctifs capables d'améliorer n'importe quel environnement et de fournir un effet lumineux focal. Installé magnétiquement et équipé d'une sécurité mécanique supplémentaire. Disponibles en version trimless, en saillie et suspendue, les unités linéaires sont alimentées à 48V et permettent l'intégration de multiples solutions, installées par fixation magnétique et mécanique, répondant aux différents besoins intérieurs. La flexibilité maximale des spots orientables met en valeur les espaces et la lentille encastrée anti-éblouissement permet un éclairage d'accentuation ou diffus. Les modules linéaires sont dotés d'un écran opale pour un éclairage homogène et accueillant. Pour un confort visuel élevé et un contrôle optimal de l'éblouissement sur toute la surface, le système est complété par des unités UGR <19 : recessed ou fold, respectivement pour une émission lumineuse directe ou orientable. GRAVITY peut être installé individuellement ou dans de multiples configurations, créant des figures géométriques avec des angles de 90°.



SPOT 3W | 2700K - 38°

LAMPING

Source	LED
Total power	3W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	175lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x10,6cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,1 kg

Codes

MFLE5201746DAN

Structure


black

PACKAGE

Package 01

Dimension: 20x9x5,5 cm / Gross weight: 0,15 kg

Certificazioni

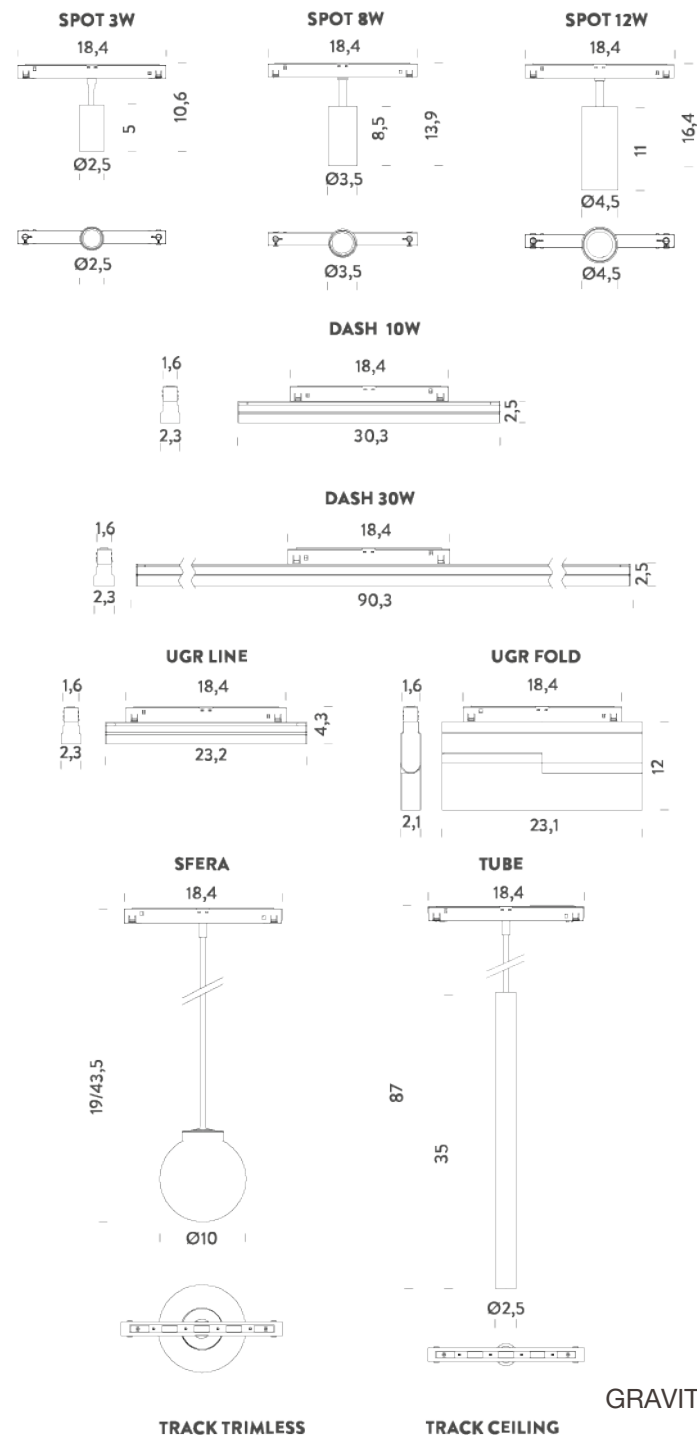

SPOT 3W | 3000K - 38°

LAMPING

Source	LED
Total power	3W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	205lm
Initial luminaire efficacy	68lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x10,6cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,1 kg

Codes

MFLE5201746WAN

Structure


black

PACKAGE

Package 01

Dimension: 20x9x5,5 cm / Gross weight: 0,15 kg

Certificazioni

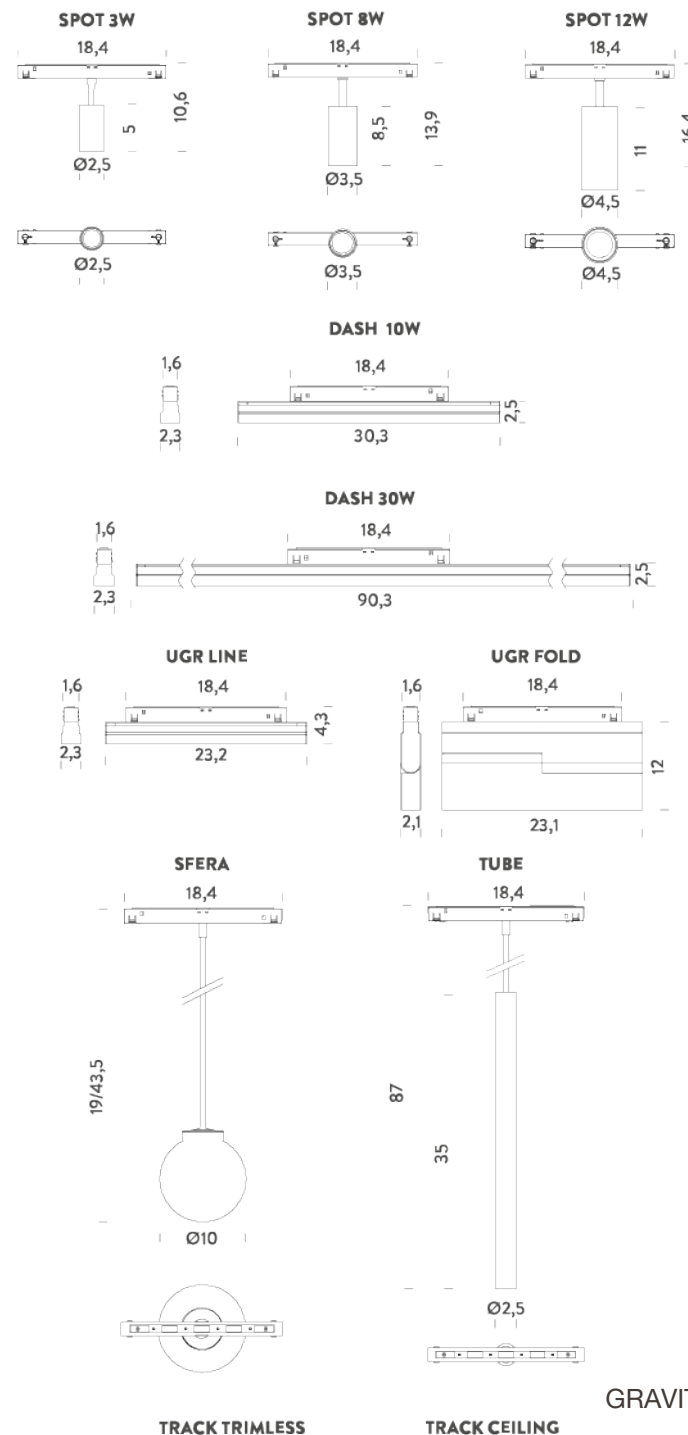

SPOT 8W | 2700K - 15°

LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	500lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5201344DAN

Structure


black

PACKAGE

Package 01

Dimension: 20,5x14,5x7,5 cm / Gross weight: 0,25 kg

Certificazioni

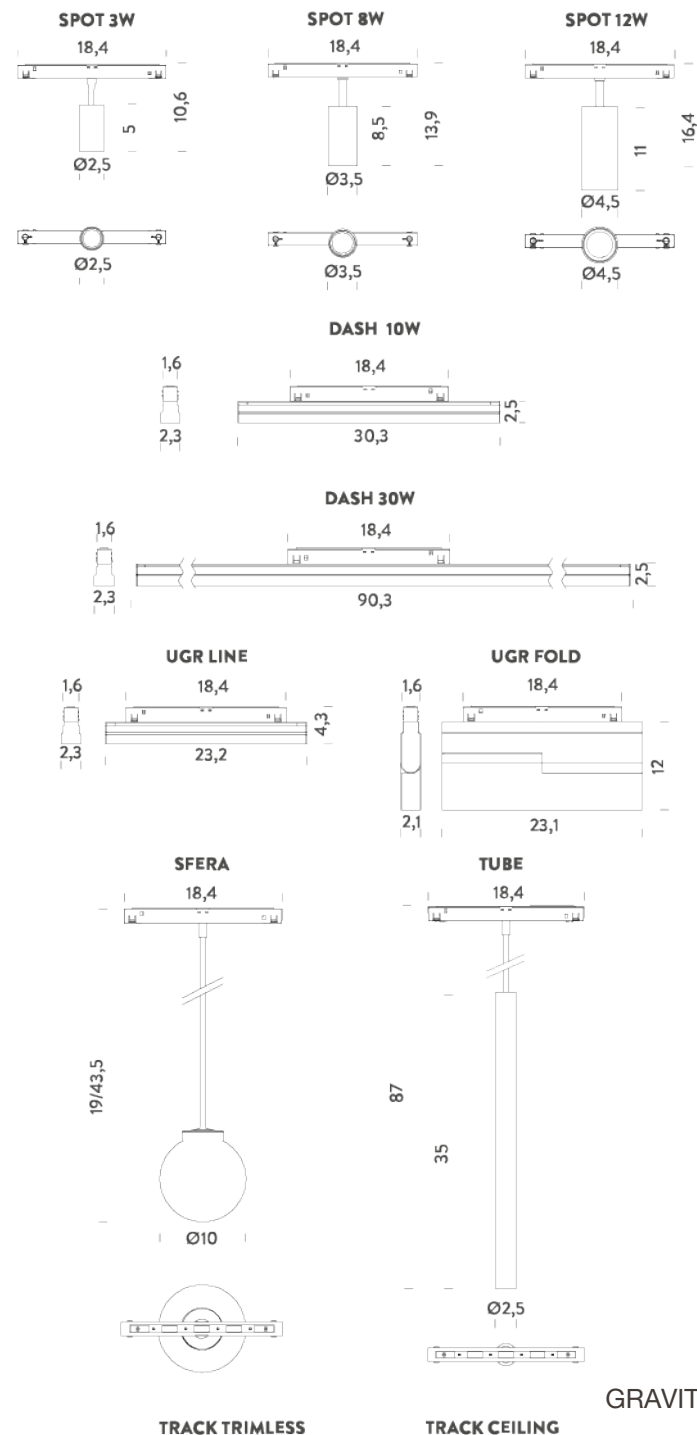

SPOT 8W | 2700K - 38°

LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	630lm
Initial luminaire efficacy	79lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5201744DAN

Structure


black

PACKAGE

Package 01

Dimension: 20,5x14,5x7,5 cm / Gross weight: 0,25 kg

Certificazioni

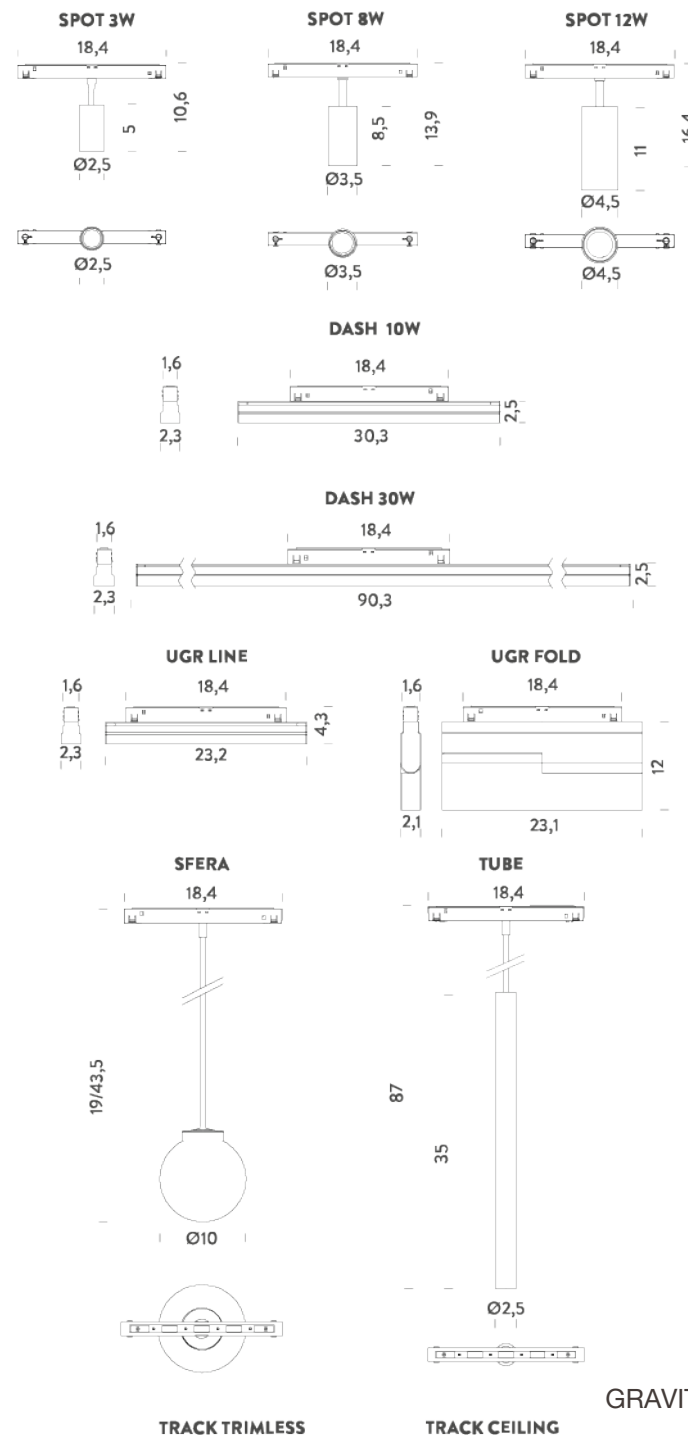

SPOT 8W | 3000K - 15°

LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	520lm
Initial luminaire efficacy	65lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5201344WAN

Structure


black

PACKAGE

Package 01

Dimension: 20,5x14,5x7,5 cm / Gross weight: 0,25 kg

Certificazioni

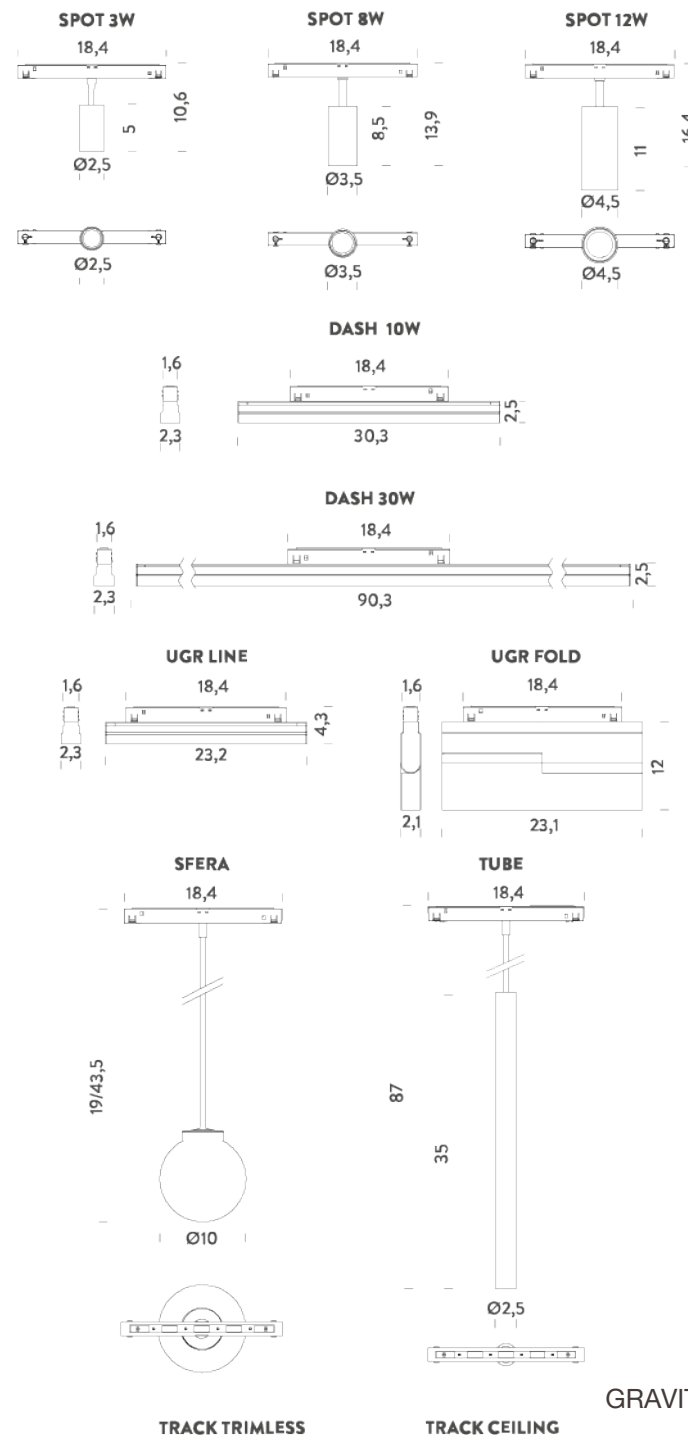

SPOT 8W | 3000K - 38°

LAMPING

Source	LED
Total power	8W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	665lm
Initial luminaire efficacy	83lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø3,5x18,4x13,9cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5201744WAN

PACKAGE

Package 01


Certificazioni



Structure

black

Dimension: 20,5x14,5x7,5 cm / Gross weight: 0,25 kg

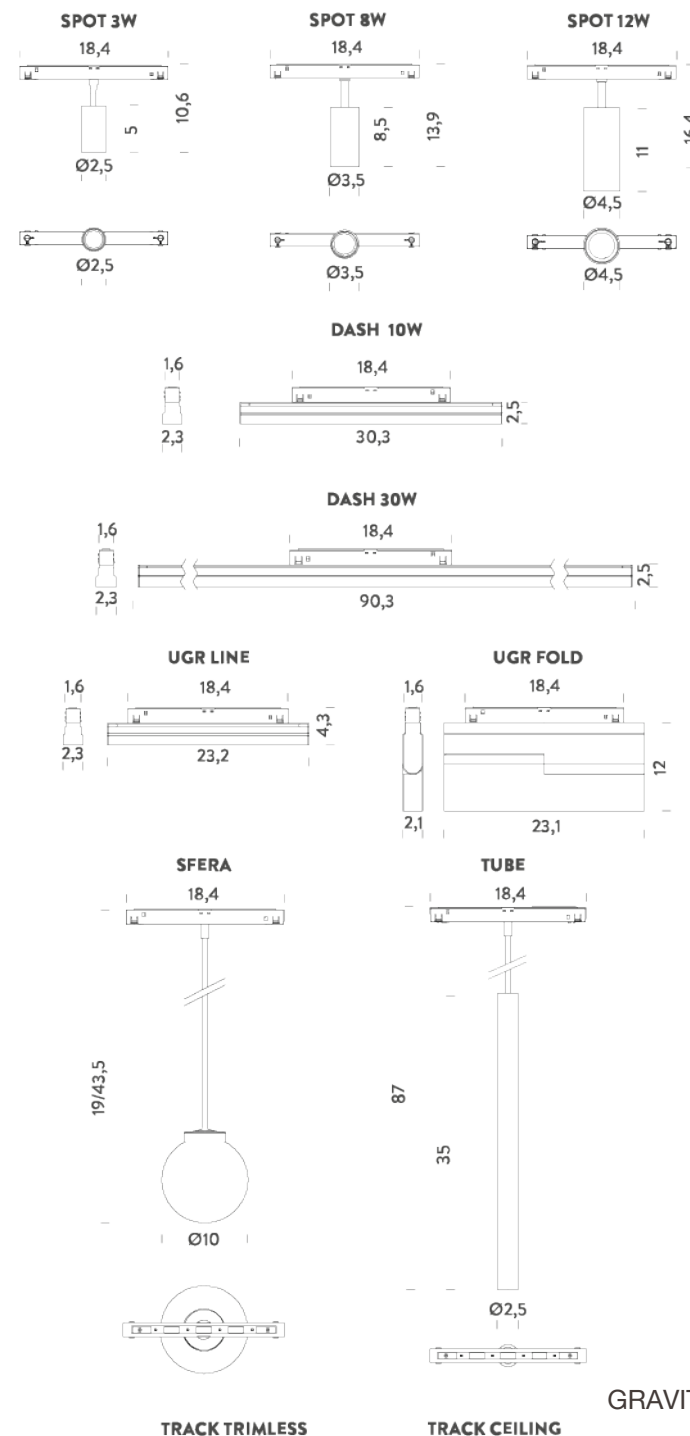

SPOT 12W | 2700K - 15°

LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	900lm
Initial luminaire efficacy	75lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,23 kg

Codes

MFLE5201345DAN

Structure


black

PACKAGE

Package 01

Dimension: 25,5x19,5x7,5 cm / Gross weight: 0,41 kg

Certificazioni

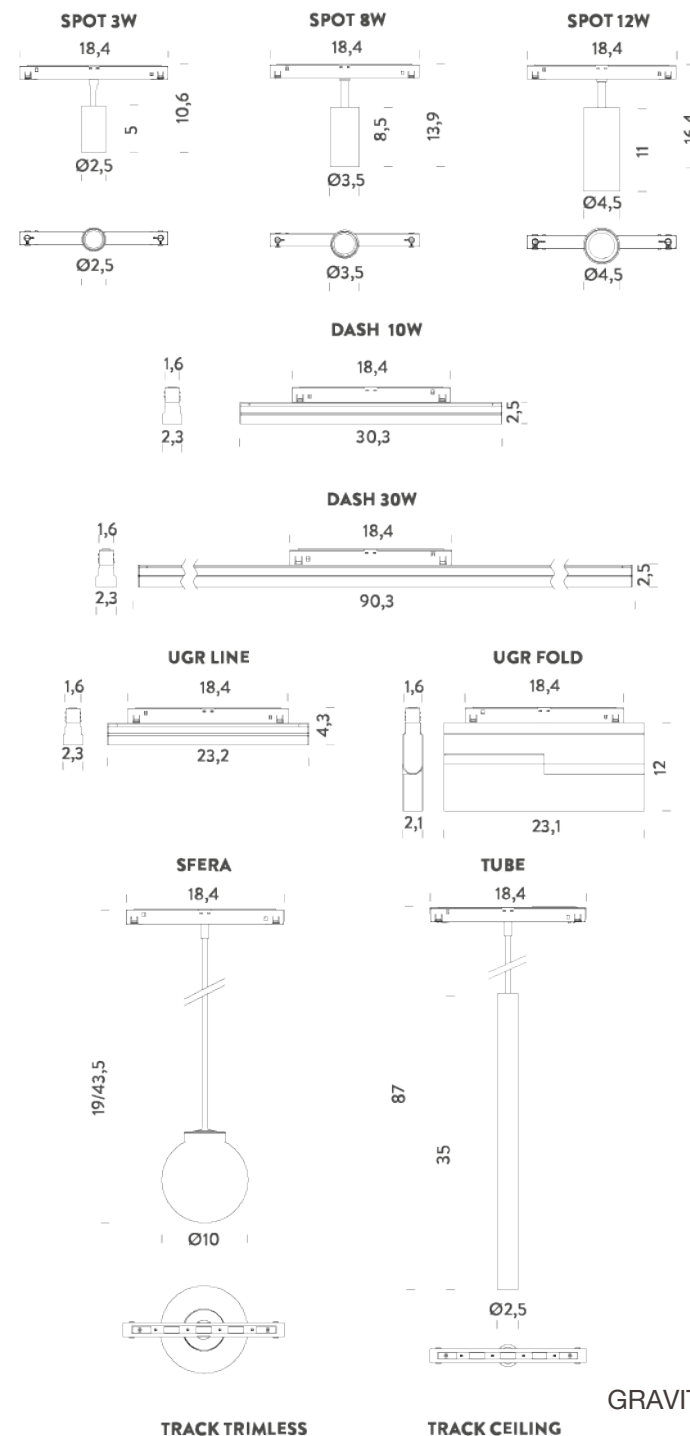

SPOT 12W | 2700K - 38°

LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	890lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,23 kg

Codes

MFLE5201745DAN

Structure


black

PACKAGE

Package 01

Dimension: 25,5x19,5x7,5 cm / Gross weight: 0,41 kg

Certificazioni

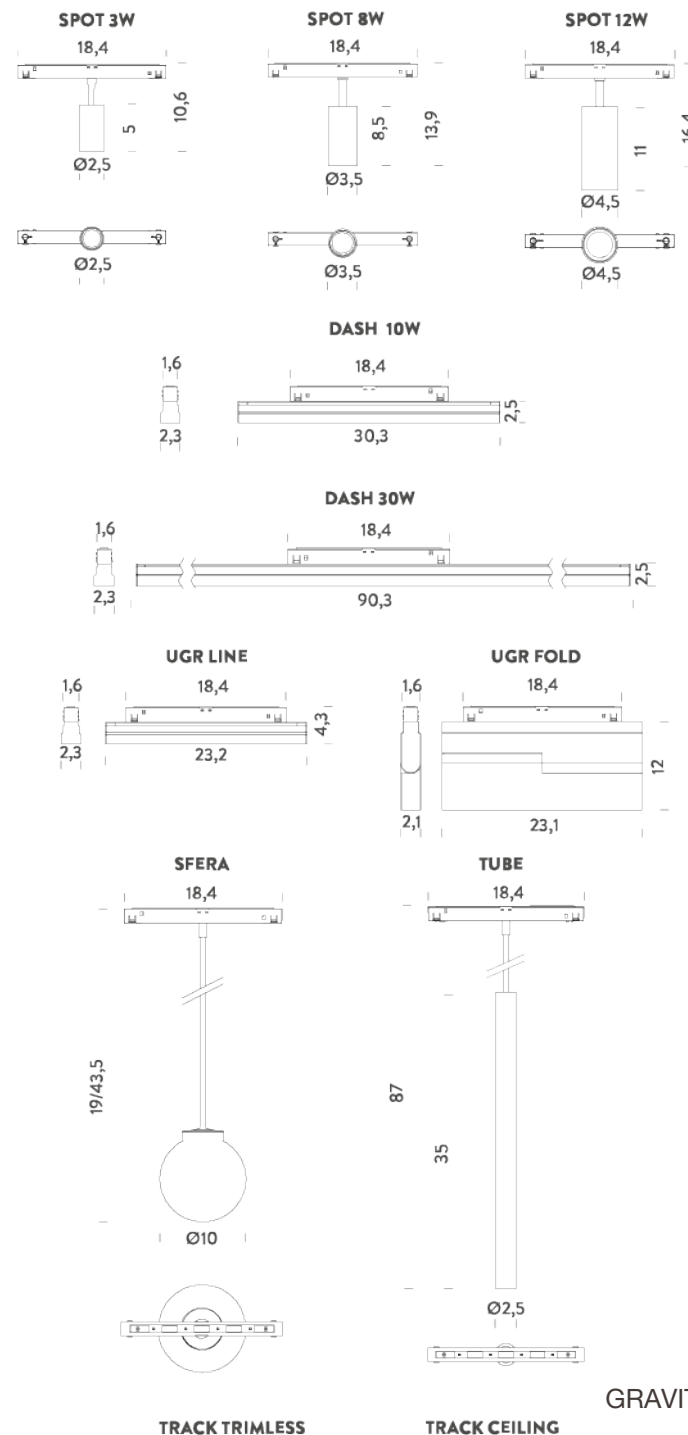

SPOT 12W | 3000K - 15°

LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	965lm
Initial luminaire efficacy	80lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,23 kg

Codes

MFLE5201345WAN

Structure


black

PACKAGE

Package 01

Dimension: 25,5x19,5x7,5 cm / Gross weight: 0,41 kg

Certificazioni

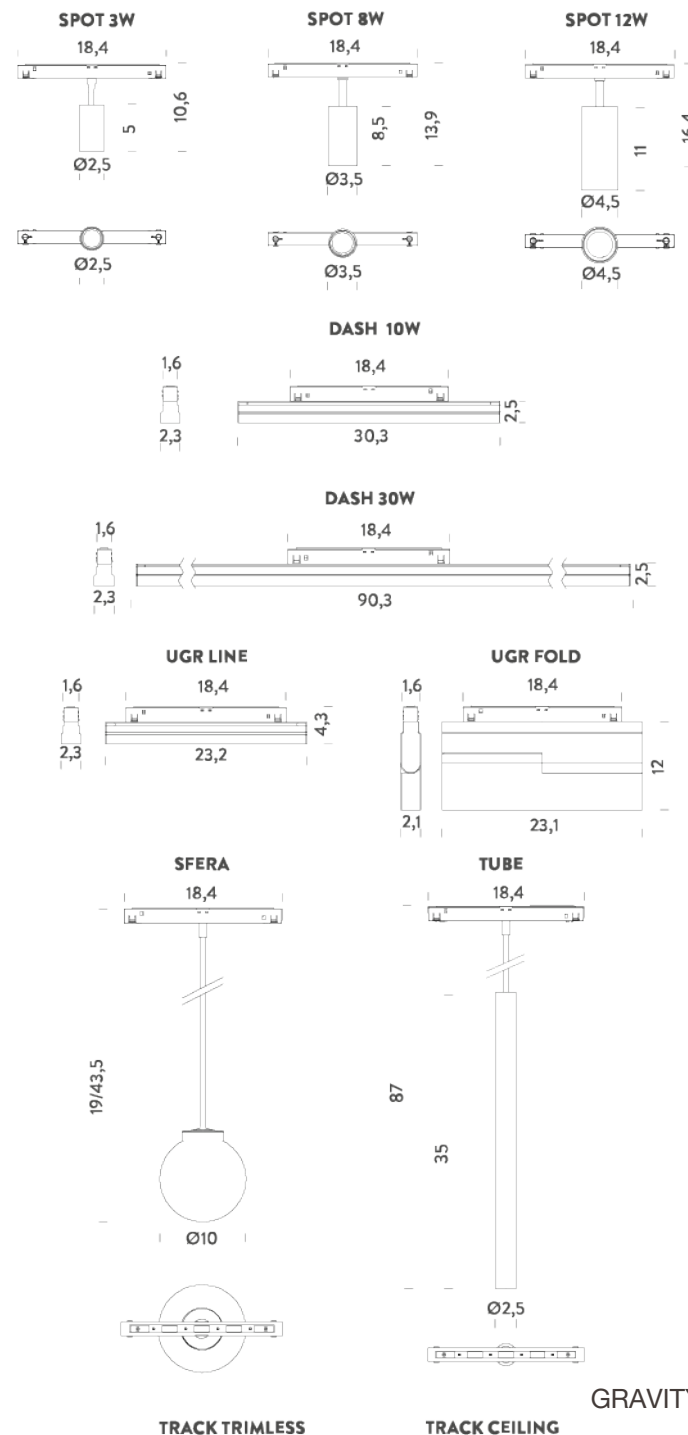

SPOT 12W | 3000K - 38°

LAMPING

Source	LED
Total power	12W
Emission	orientable
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	930lm
Initial luminaire efficacy	78lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø4,5x18,4x16,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,23 kg

Codes

MFLE5201745WAN

Structure


black

PACKAGE

Package 01

Dimension: 25,5x19,5x7,5 cm / Gross weight: 0,41 kg

Certificazioni

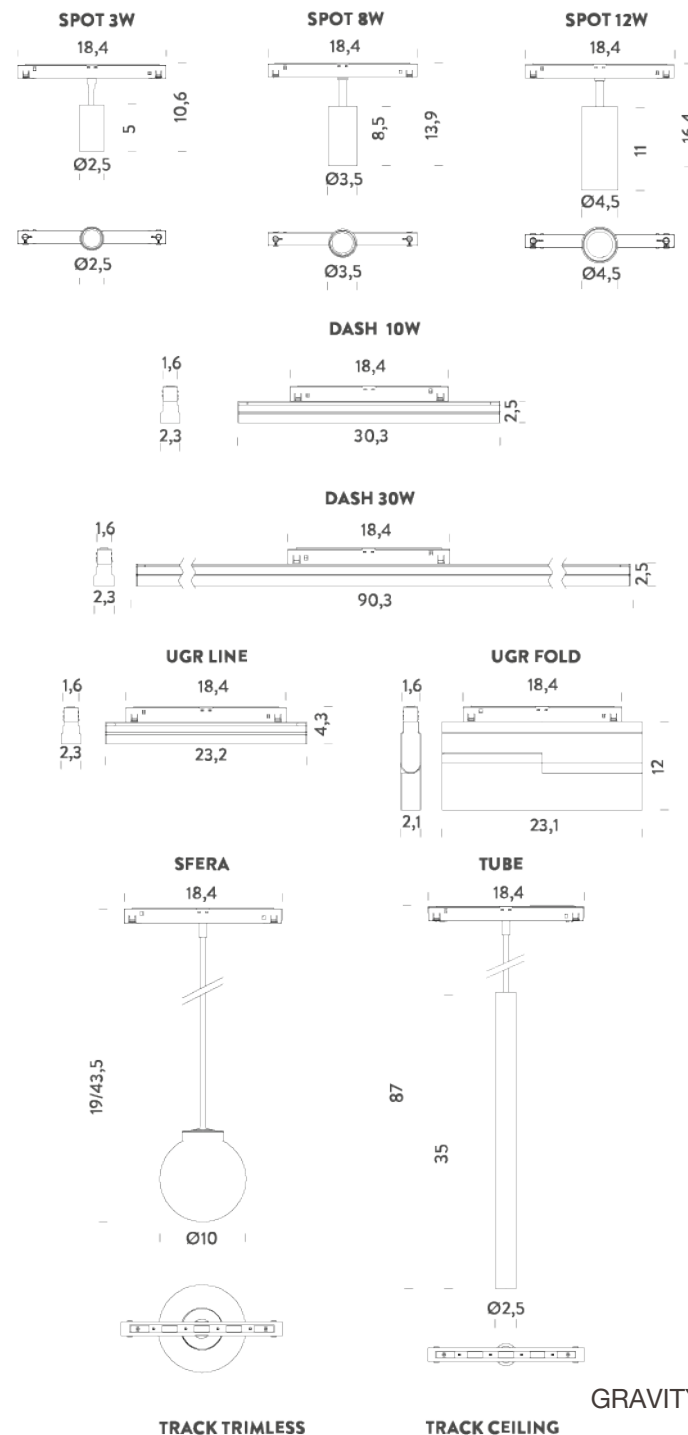

UGR LINE | 2700K

LAMPING

Source	12x LED
Total power	15W
Emission	direct UGR<19
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	1135lm
Initial luminaire efficacy	76lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	23,2x4,3x18,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5302U48DAN

Structure


black

PACKAGE

Package 01

Dimension: 25x6,5x4,5 cm / Gross weight: 0,2 kg

Certificazioni

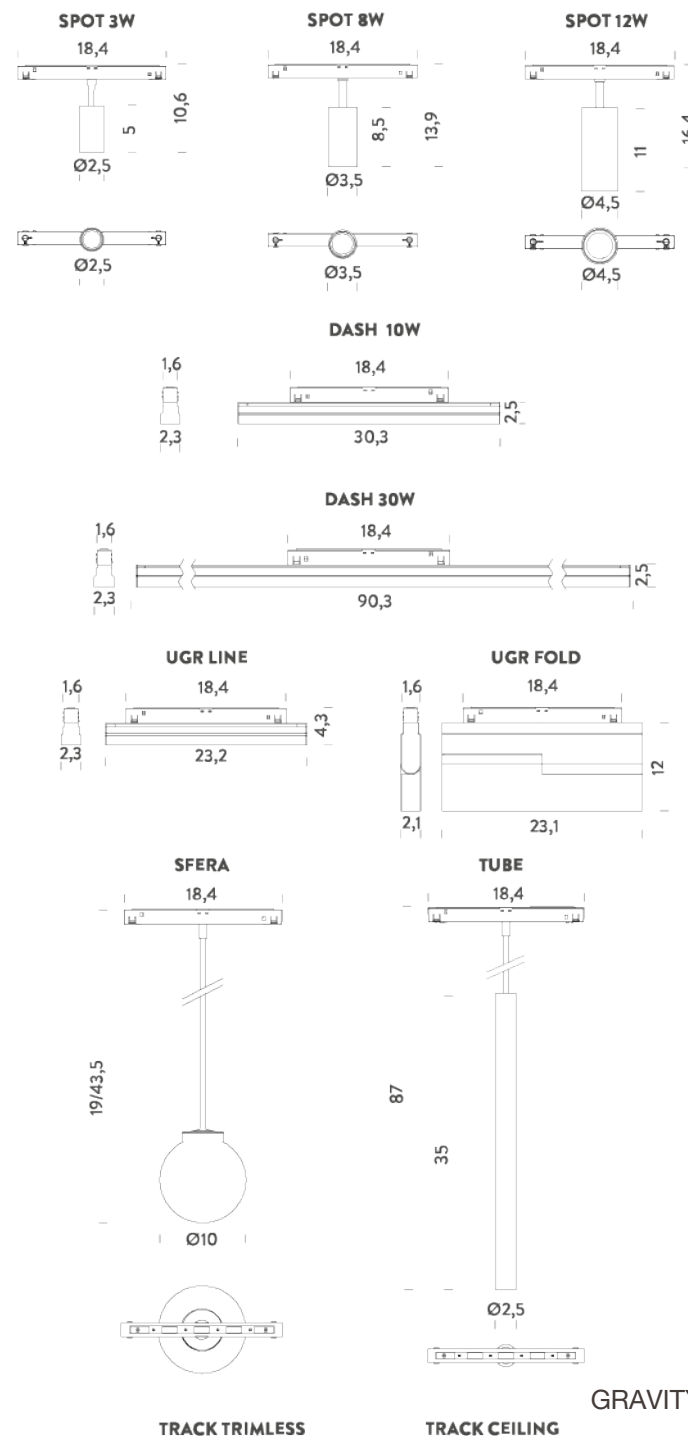

UGR LINE | 3000K

LAMPING

Source	12x LED
Total power	15W
Emission	direct UGR<19
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	1320lm
Initial luminaire efficacy	88lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	23,2x4,3x18,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,15 kg

Codes

MFLE5302U48WAN

Structure


black

PACKAGE

Package 01

Dimension: 25x6,5x4,5 cm / Gross weight: 0,2 kg

Certificazioni

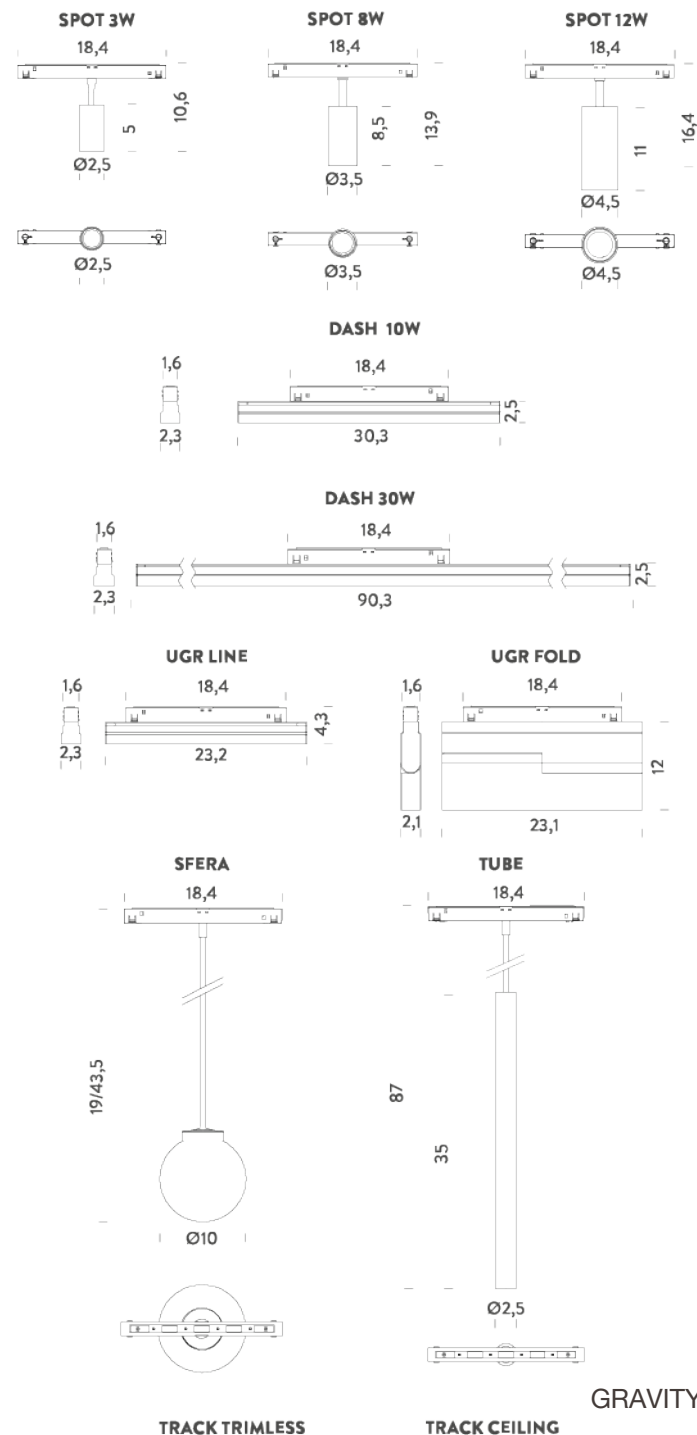

UGR FOLD | 2700K

LAMPING

Source	12x LED
Total power	20W
Emission	orientable UGR<19
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	1560lm
Initial luminaire efficacy	104lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	23,1x12x18,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Customization options	asymmetric optic
Net lamp weight	0,5 kg

Codes

MFLE5202T48DAN

Structure


black

PACKAGE

Package 01

Dimension: 29x15x4,5 cm / Gross weight: 0,65 kg

Certificazioni

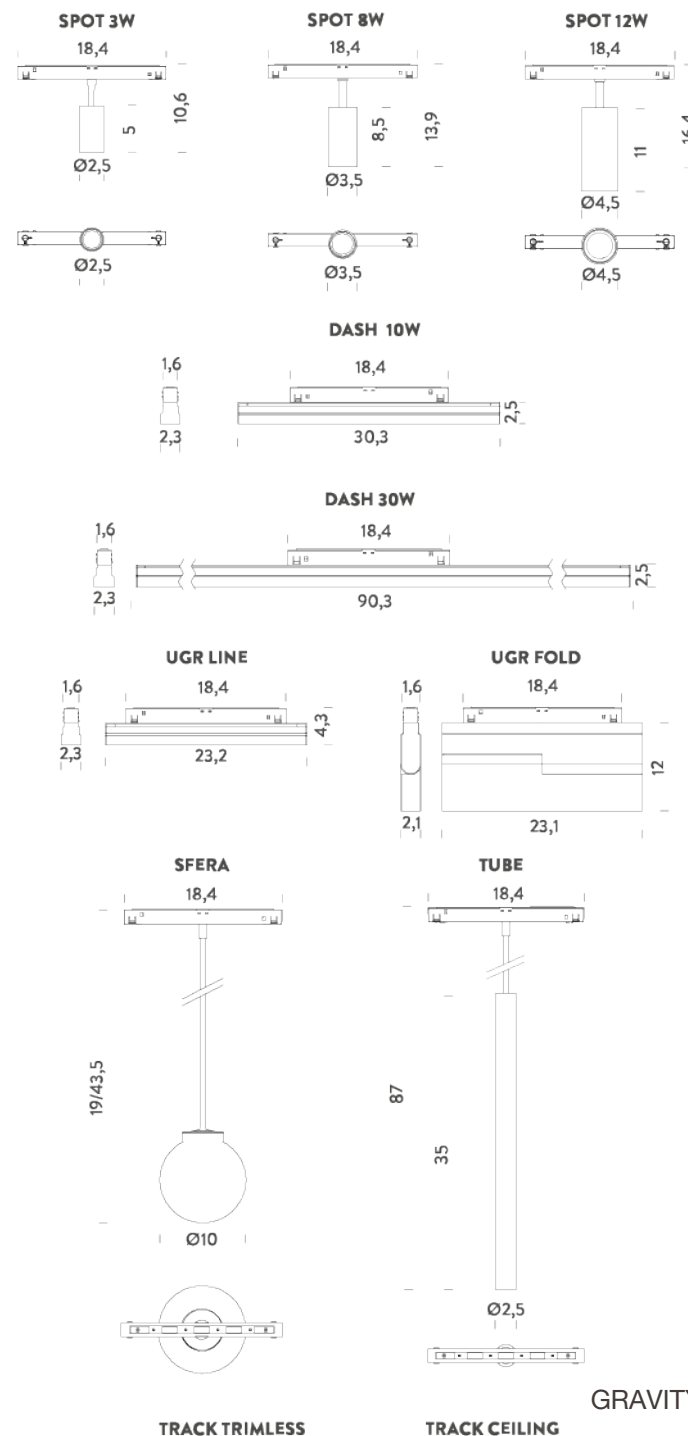

UGR FOLD | 3000K

LAMPING

Source	12x LED
Total power	20W
Emission	orientable UGR<19
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	1610lm
Initial luminaire efficacy	107lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	23,1x12x18,4cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Customization options	asymmetric optic
Net lamp weight	0,5 kg

Codes

MFLE5202T48WAN

Structure


black

PACKAGE

Package 01

Dimension: 29x15x4,5 cm / Gross weight: 0,65 kg

Certificazioni

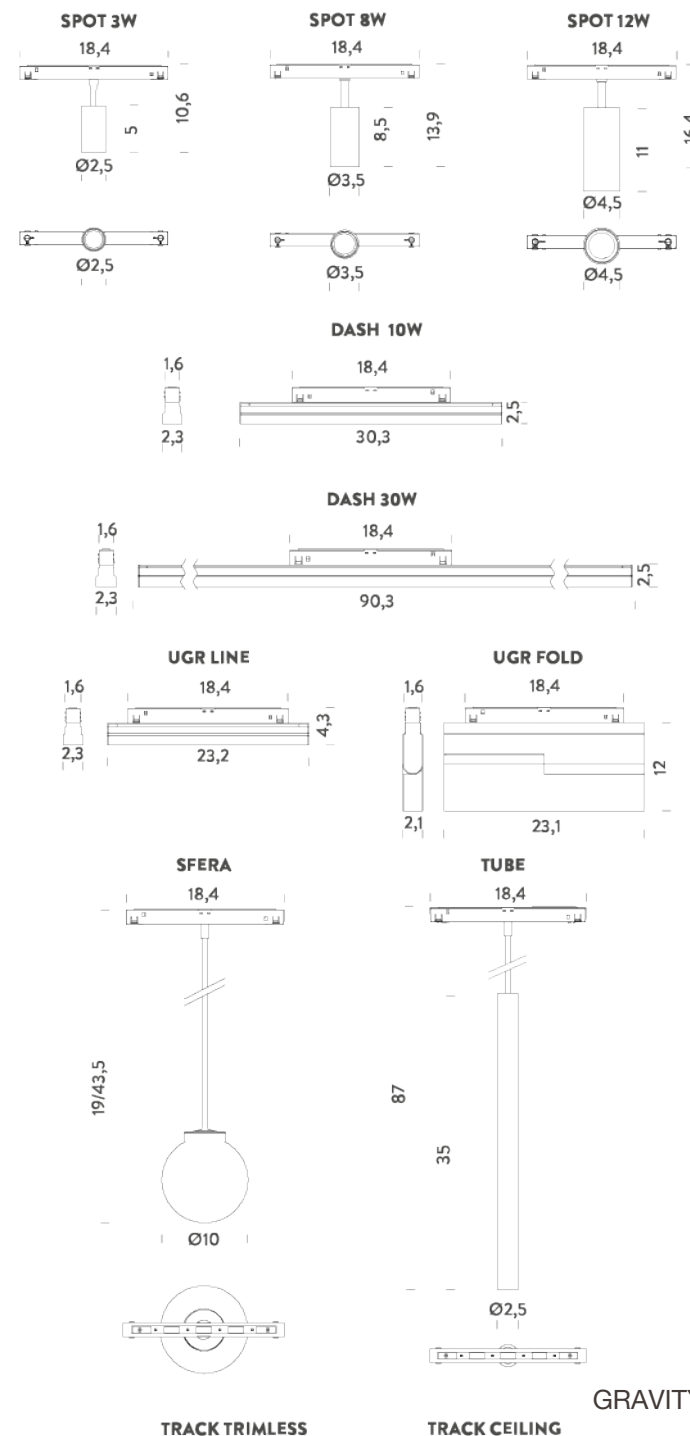

DASH 10W | 2700K

LAMPING

Source	LED strip
Total power	10W
Emission	112°
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	510lm
Initial luminaire efficacy	51lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	30,3x2,3x2,5cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,16 kg

Codes

MFLE5303G47DAN

Structure


black

PACKAGE

Package 01

Dimension: 32x6,5x4,5 cm / Gross weight: 0,2 kg

Certificazioni

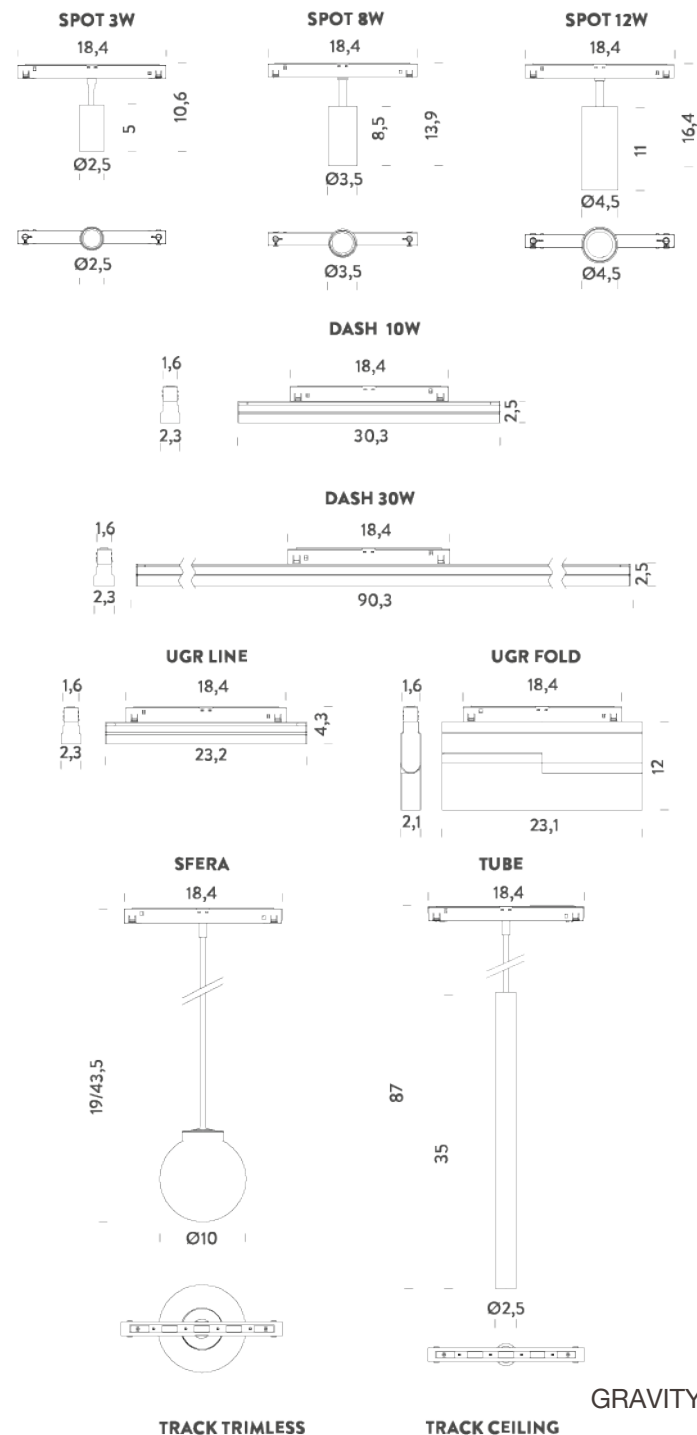

DASH 10W | 3000K

LAMPING

Source	LED strip
Total power	10W
Emission	112°
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	515lm
Initial luminaire efficacy	52lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	30,3x2,3x2,5cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,16 kg

Codes

MFLE5303G47WAN

Structure


black

PACKAGE

Package 01

Dimension: 32x6,5x4,5 cm / Gross weight: 0,2 kg

Certificazioni

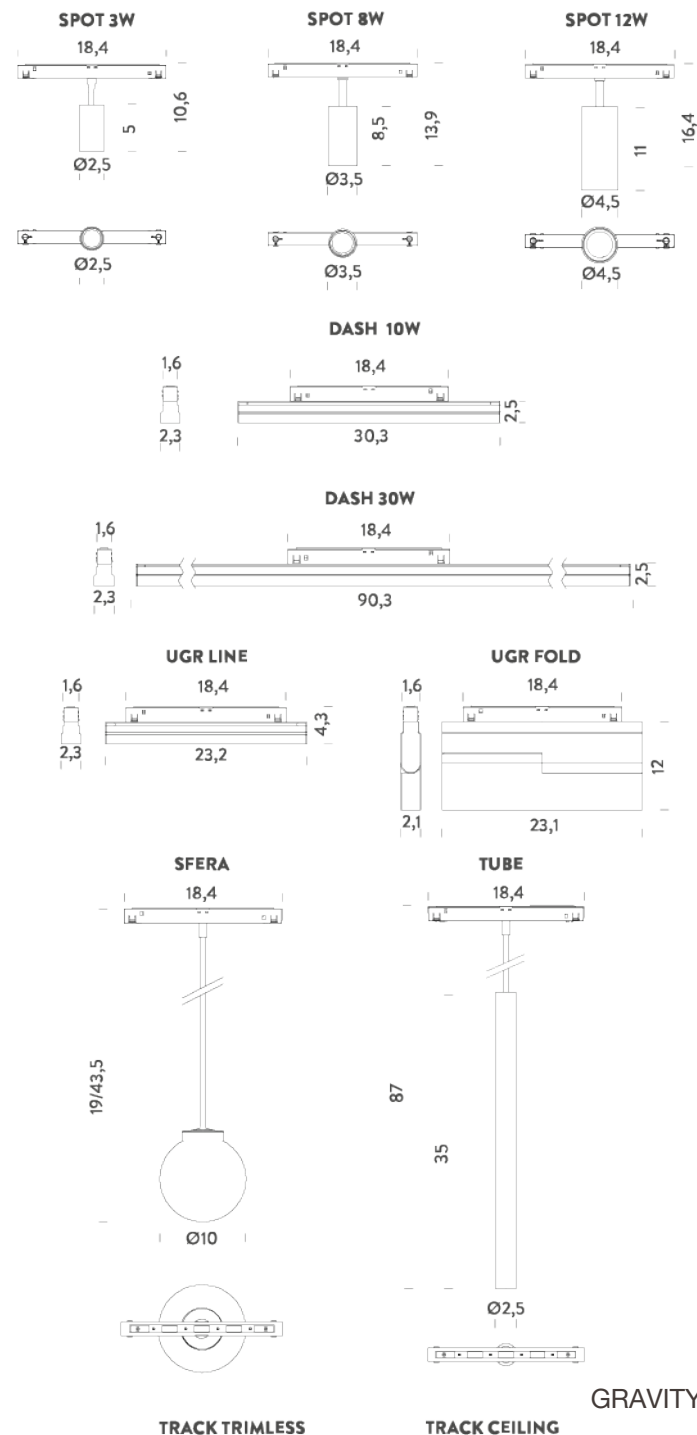

DASH 30W | 2700K

LAMPING

Source	LED strip
Total power	30W
Emission	112°
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	1435lm
Initial luminaire efficacy	48lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	90,3x2,3x2,5cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,36 kg

Codes

MFLE5309G47DAN

Structure


black

PACKAGE

Package 01

Dimension: 92x6,5x4,5 cm / Gross weight: 0,5 kg

Certificazioni

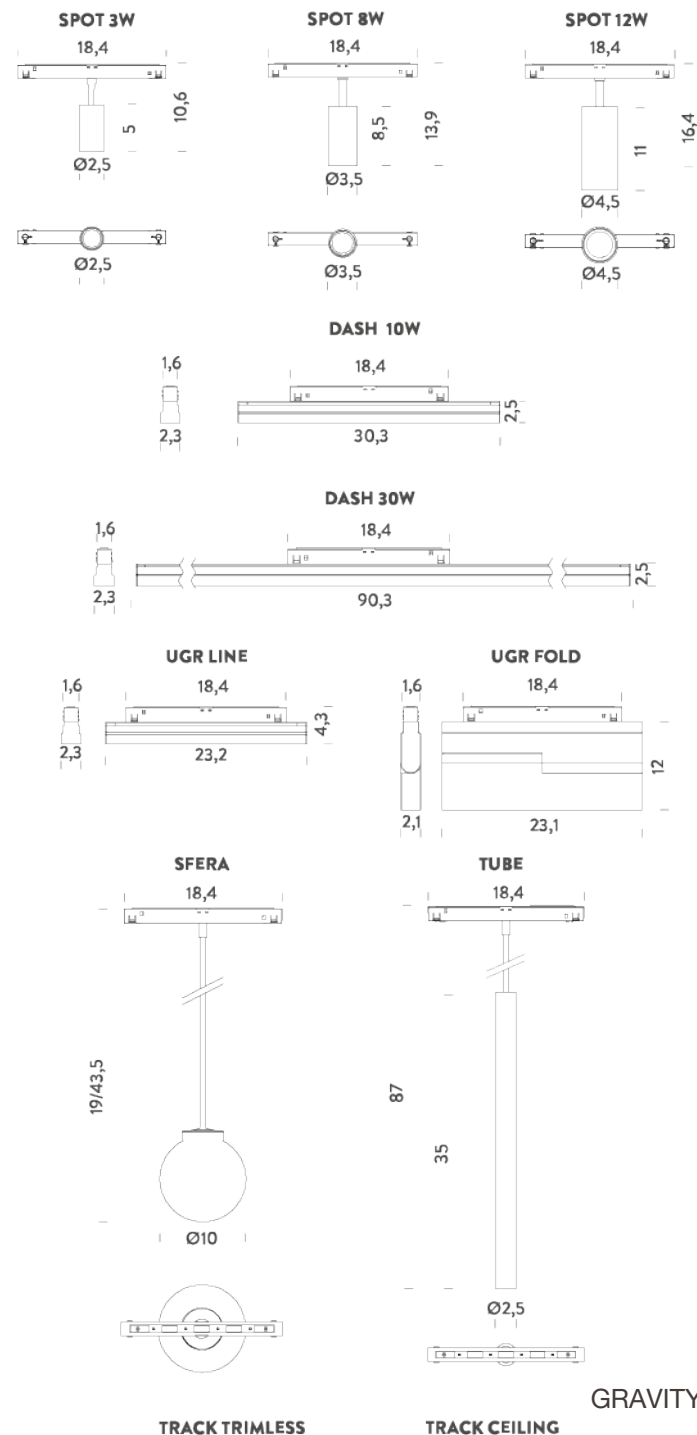

DASH 30W | 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	112°
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	1510lm
Initial luminaire efficacy	50lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	90,3x2,3x2,5cm
Materials	aluminium + polycarbonate
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,36 kg

Codes

MFLE5309G47WAN

Structure


black

PACKAGE

Package 01

Dimension: 92x6,5x4,5 cm / Gross weight: 0,5 kg

Certificazioni

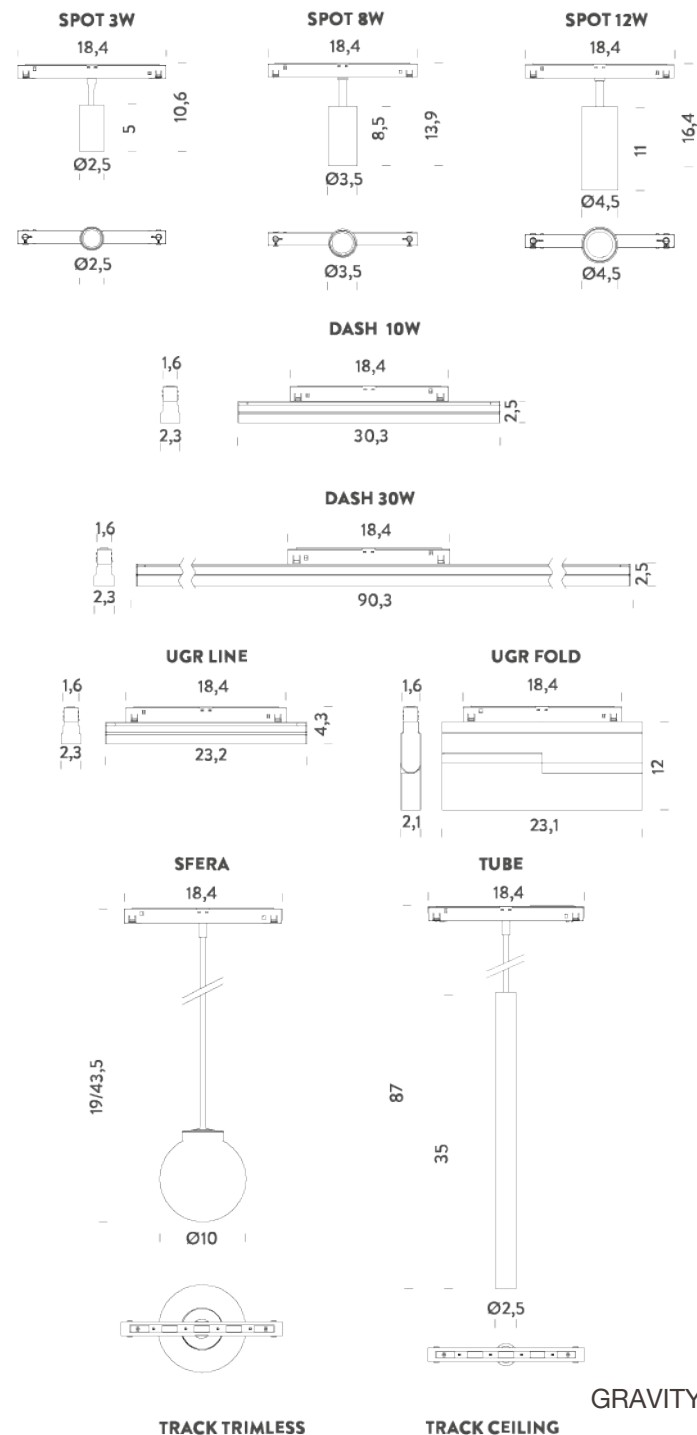

TUBE 10W | 2700K

LAMPING

Source	LED
Total power	10W
Emission	30°
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	468lm
Initial luminaire efficacy	47lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x87cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,30 kg

Codes

MGRA5601453DAN

Structure


black

PACKAGE

Package 01

Dimension: 39,5x10x7,5 cm

Certificazioni

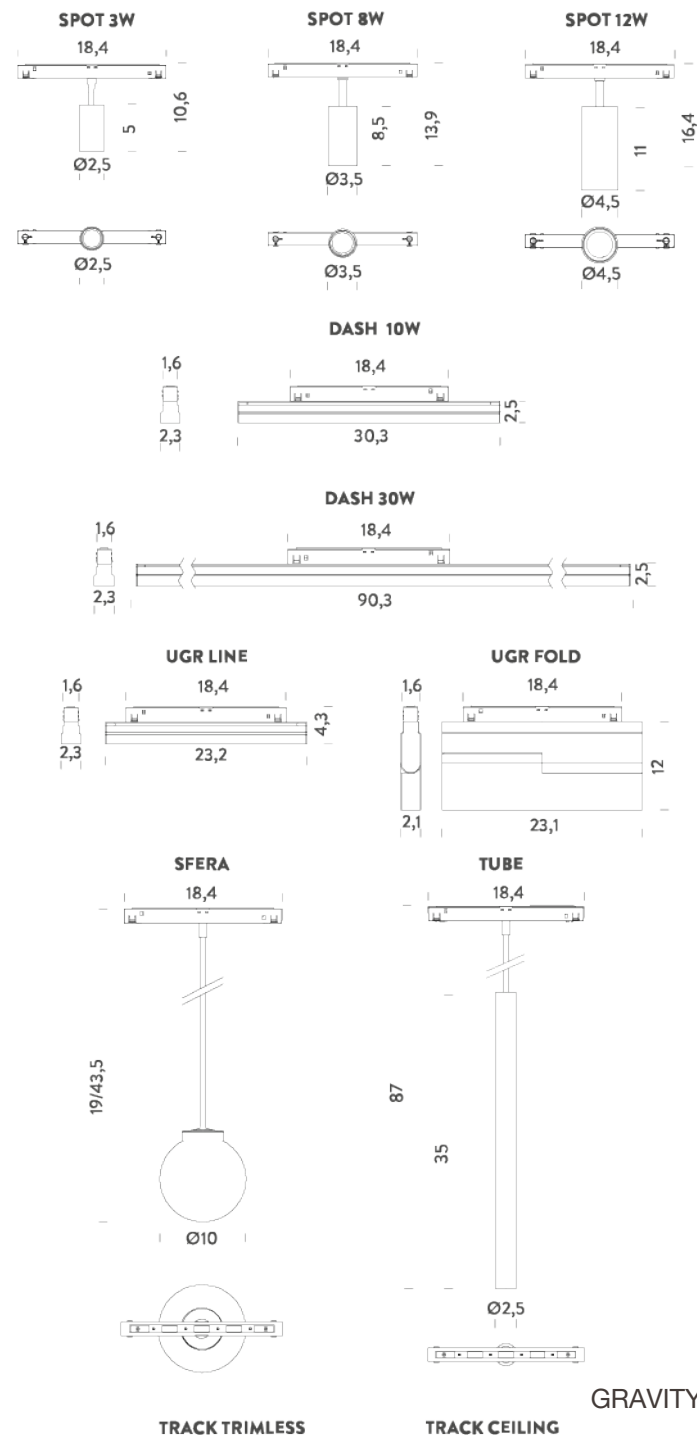

TUBE 10W | 3000K

LAMPING

Source	LED
Total power	10W
Emission	30°
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	520lm
Initial luminaire efficacy	52lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø2,5x18,4x87cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,30 kg

Codes

MGRA5601453WAN

Structure


black

PACKAGE

Package 01

Dimension: 39,5x10x7,5 cm

Certificazioni

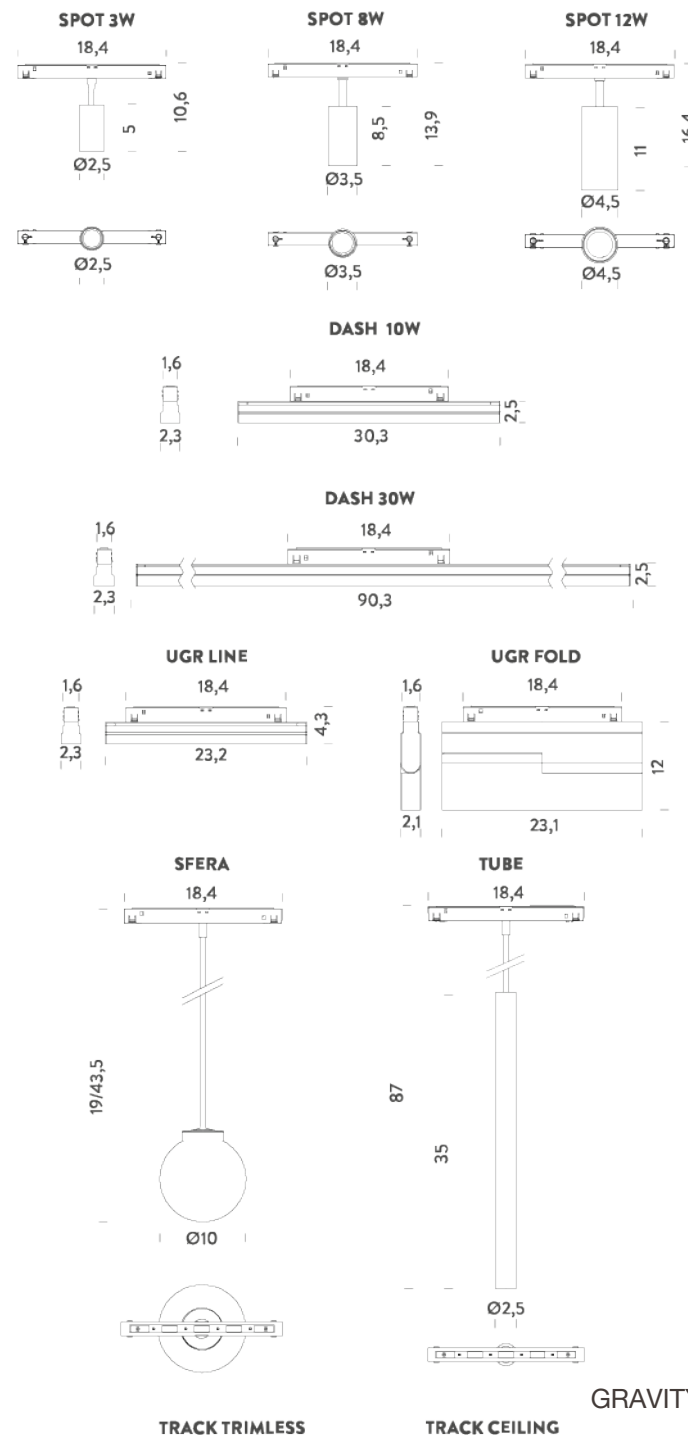

SPHERE 19CM | 2700K

LAMPING

Source	LED
Total power	5W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	348lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø10x18,4x19cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,17 kg

Codes

MGRA5621G21DAN

Structure


white glass

PACKAGE

Package 01

Dimension: 29x20x12,5 cm / Gross weight: 0,35 kg

Certificazioni

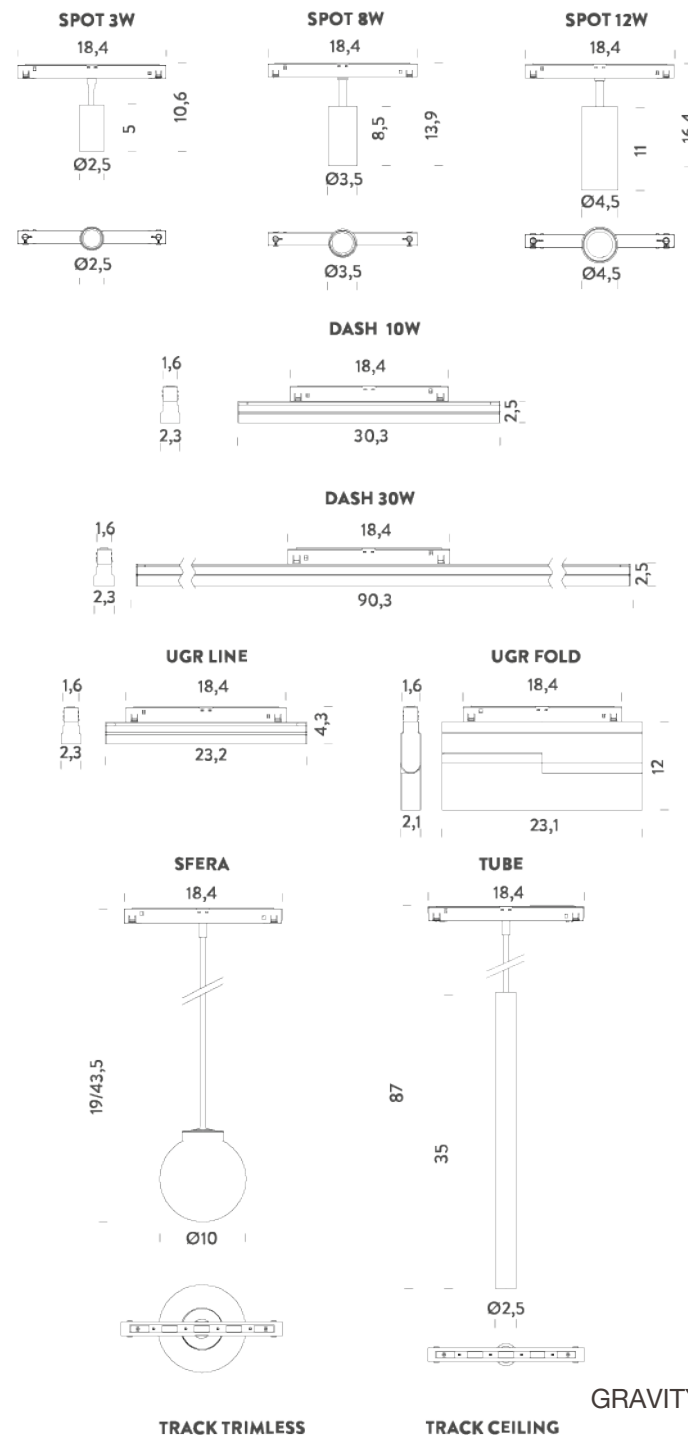

SPHERE 19CM | 3000K

LAMPING

Source	LED
Total power	5W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	427lm
Initial luminaire efficacy	85lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø10x18,4x19cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,17 kg

Codes

MGRA5621G21WAN

Structure


white glass

PACKAGE

Package 01

Dimension: 29x20x12,5 cm / Gross weight: 0,35 kg

Certificazioni

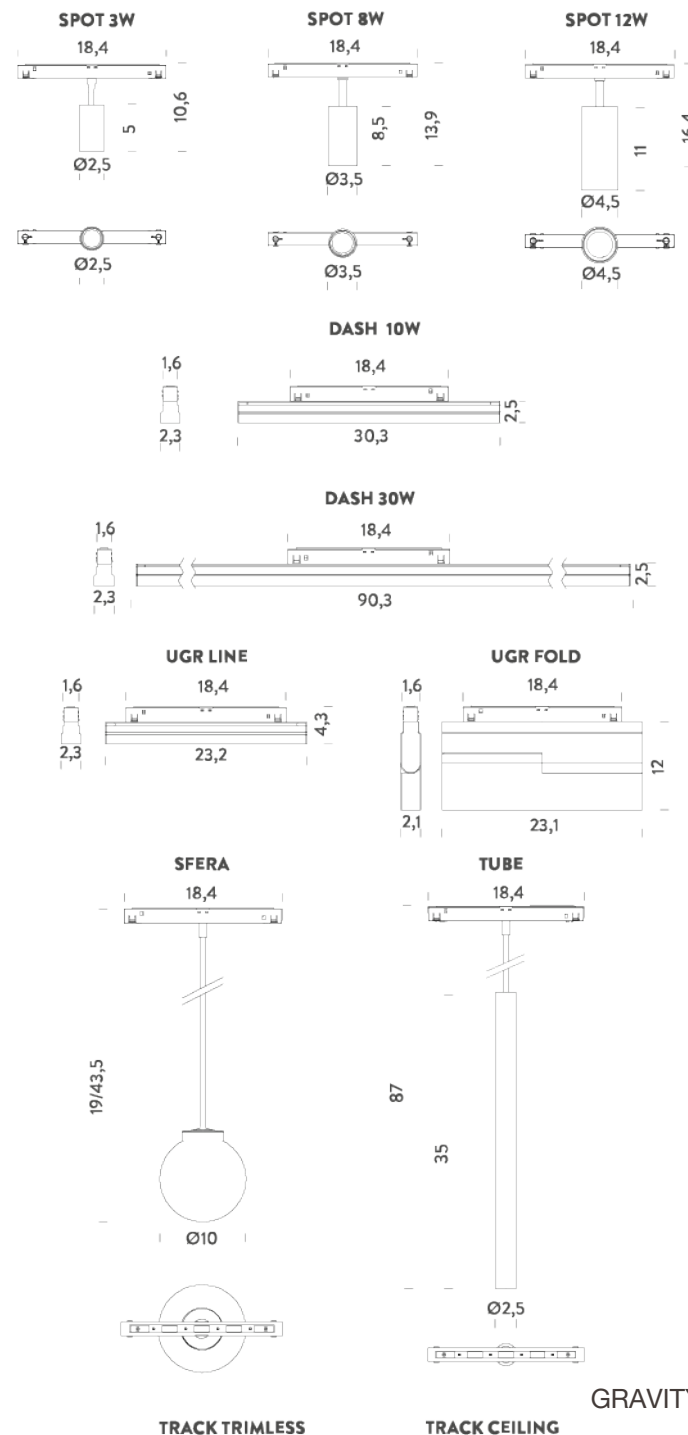

SPHERE 43,5CM | 2700K

LAMPING

Source	LED
Total power	5W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	2700K
Luminous flux	348lm
Initial luminaire efficacy	70lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø10x18,4x43,5cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,2 kg

Codes

MGRA5641G21DAN

Structure


white glass

PACKAGE

Package 01

Dimension: 49,5x29,5x15 cm / Gross weight: 0,4 kg

Certificazioni

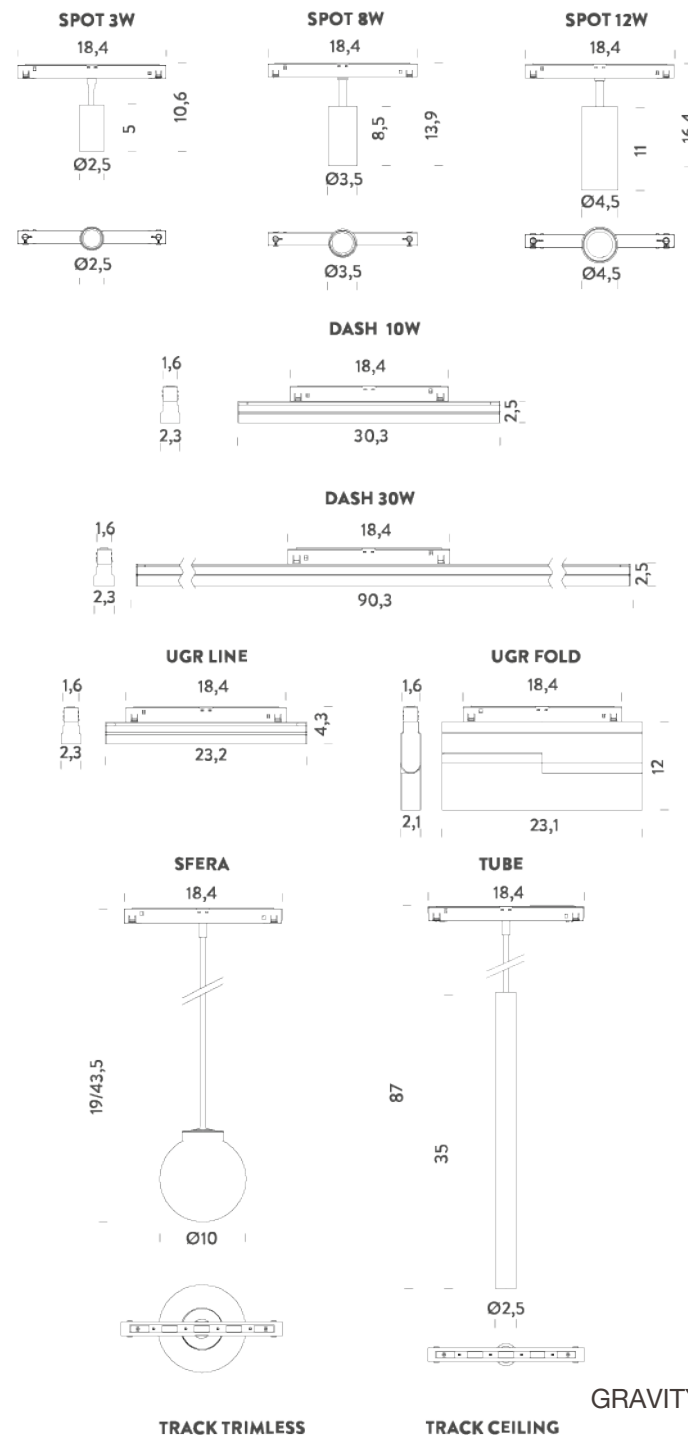

SPHERE 43,5CM | 3000K

LAMPING

Source	LED
Total power	5W
Emission	diffused
Switching	DALI
Tension	48V
Color temperature	3000K
Luminous flux	427lm
Initial luminaire efficacy	85lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	20
Dimensions	ø10x18,4x43,5cm
Ambient temperature range	-15°C / +35°C
Performance ambient temperature	25°C
Notes	driver, track and accessories not included
Net lamp weight	0,2 kg

Codes

MGRA5641G21WAN

Structure


white glass

PACKAGE

Package 01

Dimension: 49,5x29,5x15 cm / Gross weight: 0,4 kg

Certificazioni

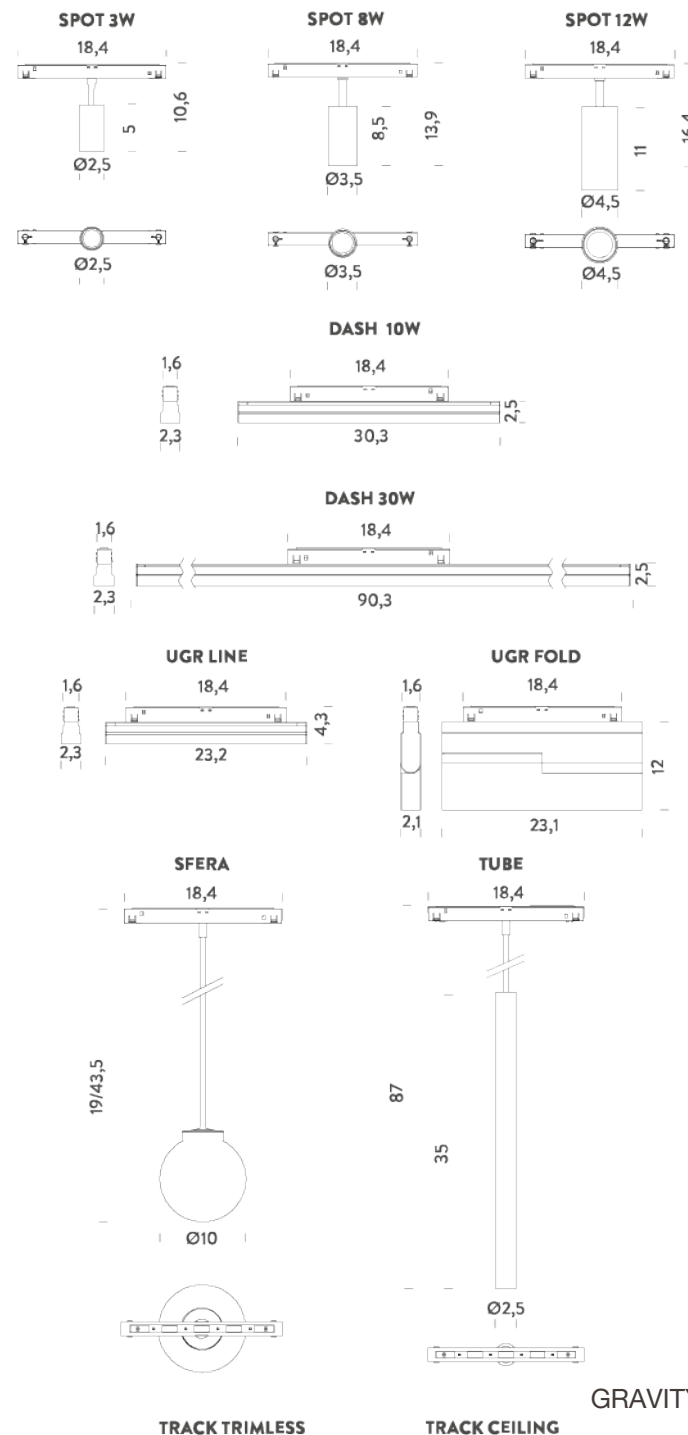

TRACK CEILING | 1M

LAMPING

Tension
Dimensions
Materials
Notes
Customization options
Accessories

48V
100x2,6x5,4cm
aluminium
pendant version available
recessed trim version
Ceiling-Pendant Track 48V - accessories, | Ceiling-Trimless Track 48V - accessories,
0,97 kg

Codes

MFLE0210NE

Structure

black


PACKAGE

Package 01

Dimension: 107x7,5x7,5 cm / Gross weight: 1,28 kg

Certificazioni

UK
CA

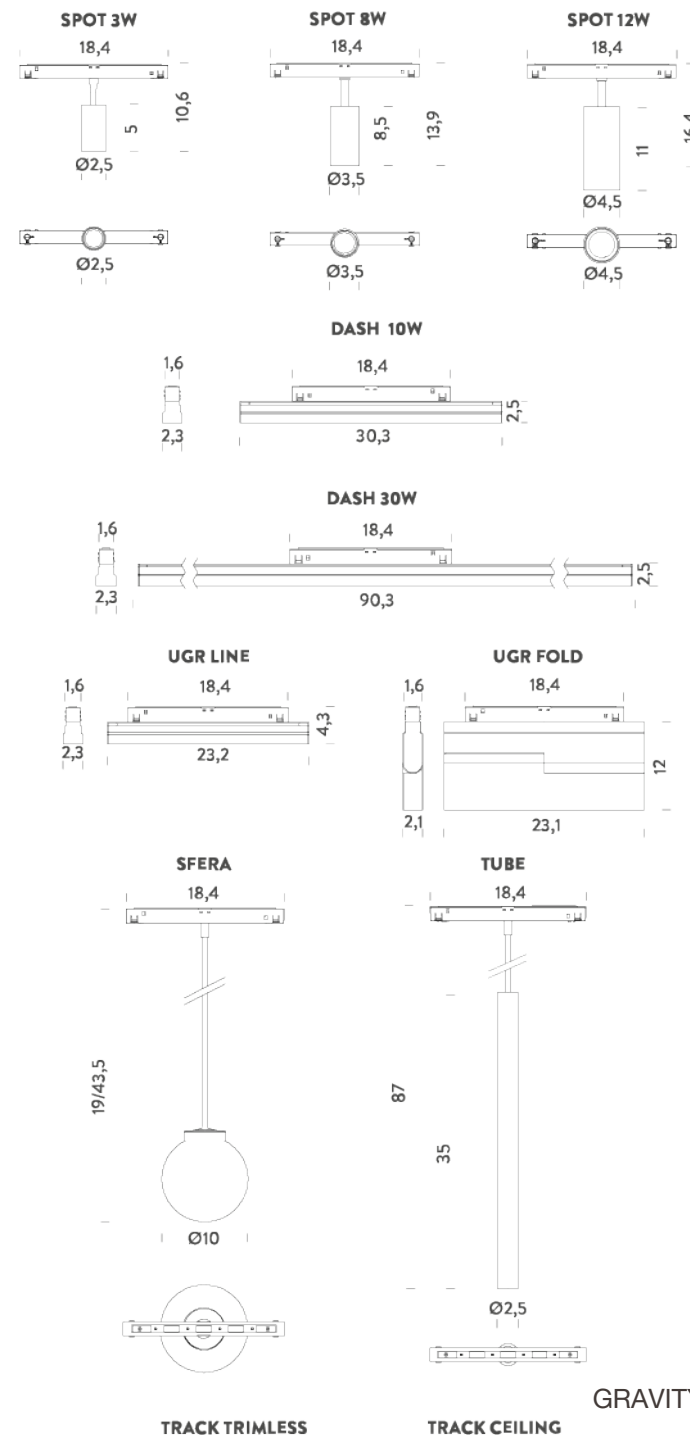

TRACK CEILING | 2M

LAMPING

Tension
Dimensions
Materials
Notes
Customization options
Accessories

48V
200x2,6x5,4cm
aluminium
pendant version available
recessed trim version
Ceiling-Pendant Track 48V - accessories, | Ceiling-Trimless Track 48V - accessories,
1,93 kg

Codes

MFLE0220NE

Structure

black


PACKAGE

Package 01

Dimension: 207x7,5x7,5 cm / Gross weight: 2,59 kg

Certificazioni

UK
CA

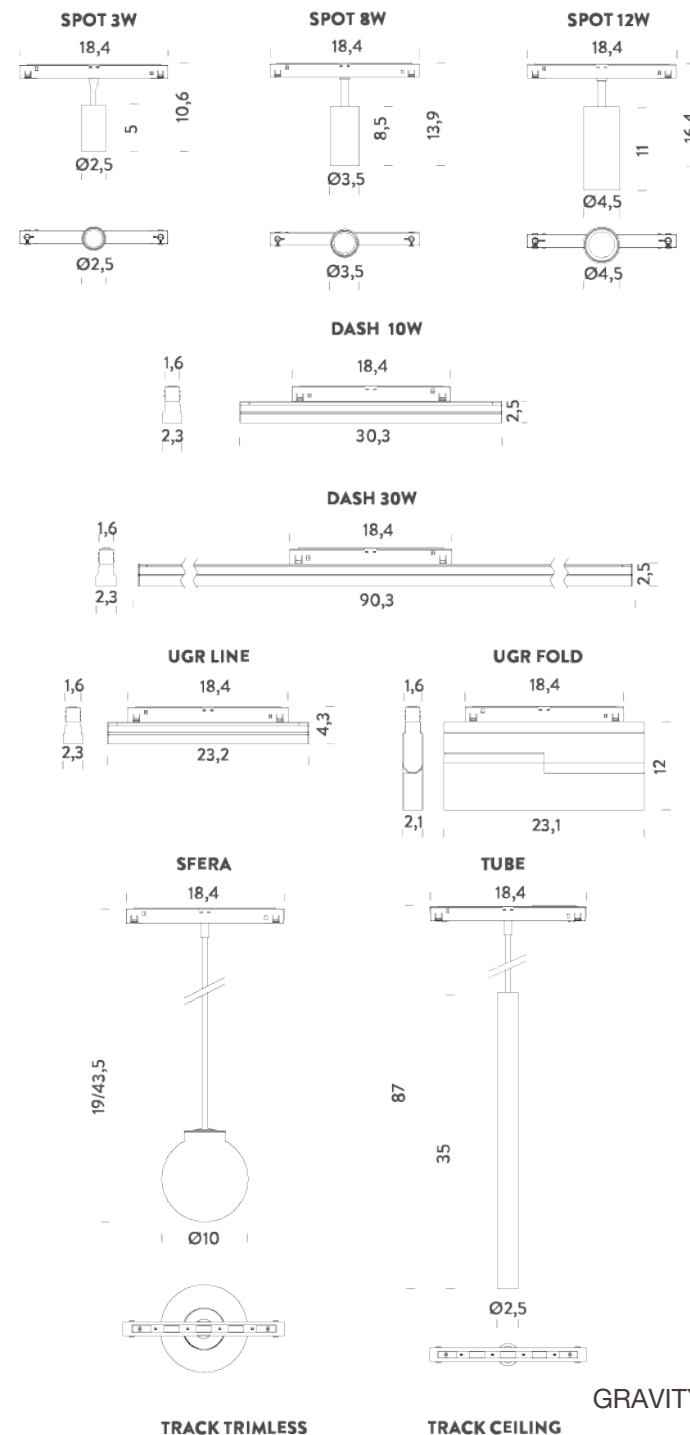

TRACK CEILING | 3M

LAMPING

Tension	48V
Dimensions	300x2,6x5x4cm
Materials	aluminium
Notes	pendant version available
Customization options	recessed trim version
Accessories	Ceiling-Pendant Track 48V - accessories, Ceiling-Trimless Track 48V - accessories,
Net lamp weight	2,9 kg

Codes

MFLE0230NE

PACKAGE

Package 01


Certificazioni



Structure

black

Dimension: 307x7,5x7,5 cm / Gross weight: 3,87 kg

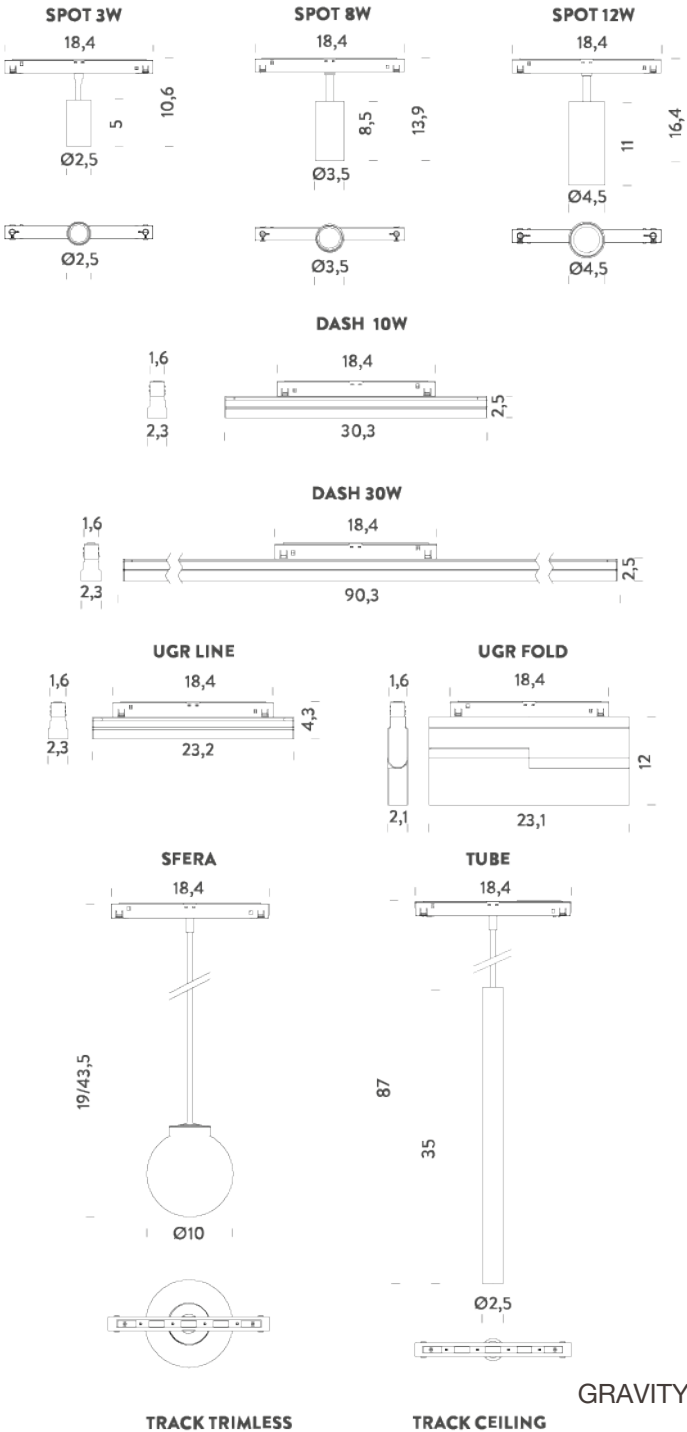

TRACK TRIMLESS | 1M

LAMPING

Tension	48V
Dimensions	100x7,4x5,4cm
Materials	aluminium
Customization options	recessed trim version
Accessories	Ceiling-Trimless Track 48V - accessories, Trimless Track 48V - accessories,
Net lamp weight	1,3 kg

Codes

MFLE0810NE

Structure


black

PACKAGE

Package 01

Dimension: 107x9,5x9,5 cm / Gross weight: 1,68 kg

Certificazioni

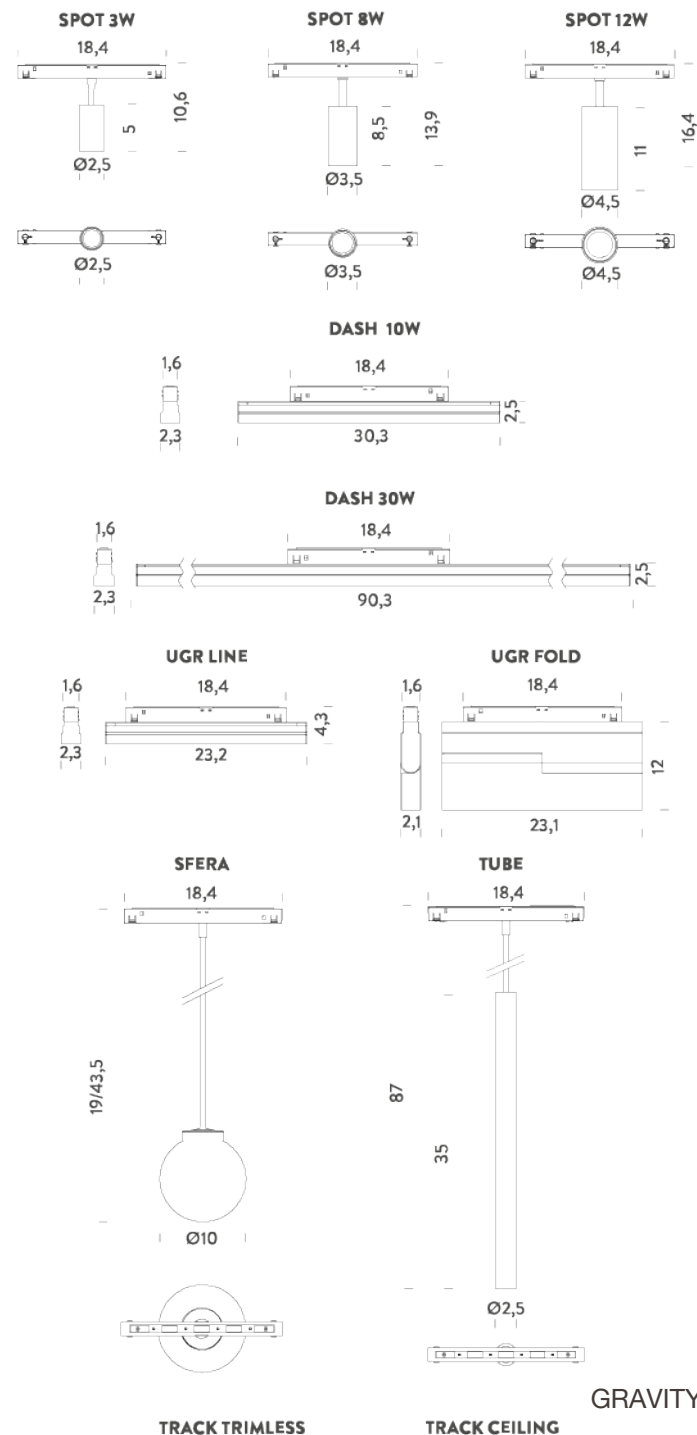

TRACK TRIMLESS | 2M

LAMPING

Tension	48V
Dimensions	200x7,4x5,4cm
Materials	aluminium
Customization options	recessed trim version
Accessories	Ceiling-Trimless Track 48V - accessories, Trimless Track 48V - accessories,
Net lamp weight	3 kg

Codes

MFLE0820NE

Structure


black

PACKAGE

Package 01

Dimension: 207x9,5x9,5 cm / Gross weight: 3,65 kg

Certificazioni

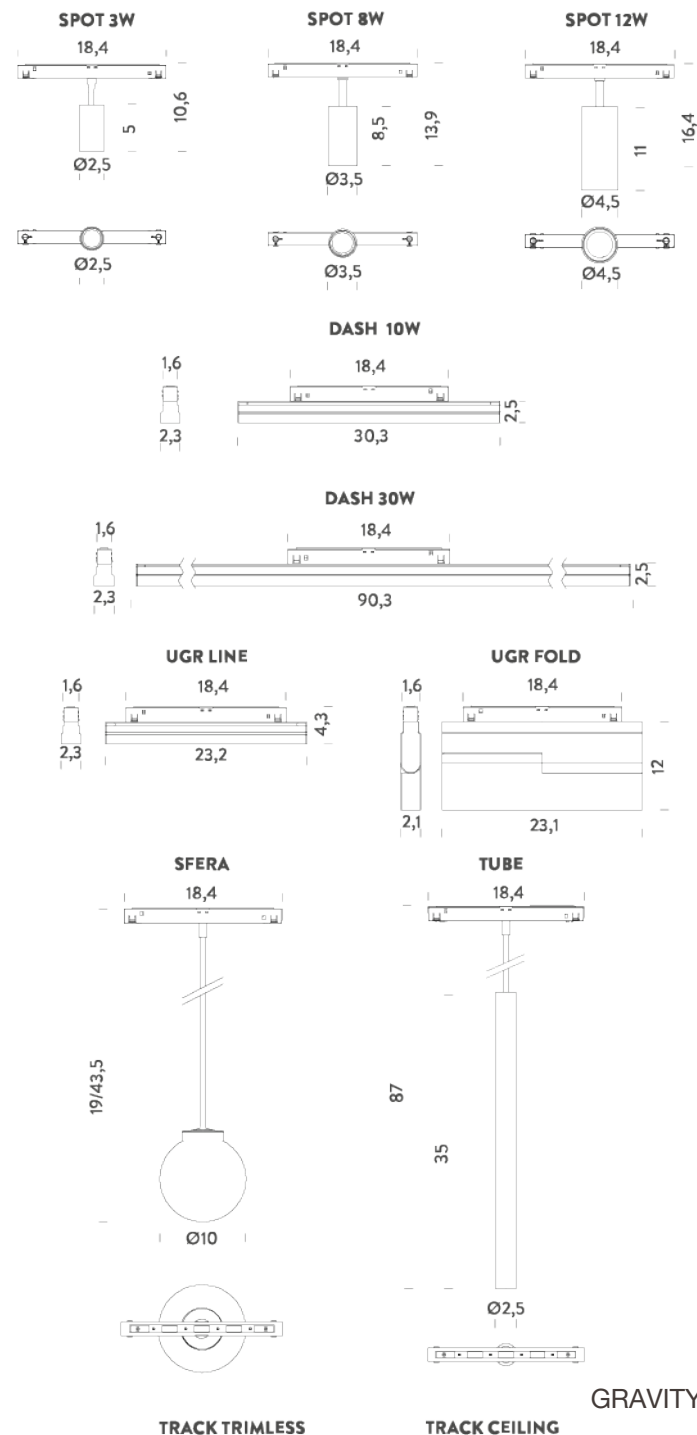

TRACK TRIMLESS | 3M

LAMPING

Tension	48V
Dimensions	300x7,4x5,4cm
Materials	aluminium
Customization options	recessed trim version
Accessories	Ceiling-Trimless Track 48V - accessories, Trimless Track 48V - accessories,
Net lamp weight	4,02 kg

Codes

MFLE0830NE

Structure

black

PACKAGE

Package 01

Dimension: 307x9,5x9,5 cm / Gross weight: 5,33 kg

Certificazioni

