

MINIFLUX LINEA WALL

Miniflux Linea est la nouvelle gamme de systèmes linéaires dédiée à l'éclairage intérieur général et décoratif. Il est divisé en trois versions, respectivement suspendues avec diffuseur transparent ou opale et avec fixation murale à l'aide d'une structure spéciale ou d'un clip. Corps en profilé d'aluminium sur lequel est positionnée une bande LED 24V DC avec CRI>97. La collection est proposée en différentes finitions et températures de couleur. Alimentation déportée incluse (driver embarqué pour version murale).



WALL 8° | 2700K

LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	2700K
Luminous flux	681lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
Energy class	F
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	wall support with integrated driver and dimmable push button included driver included RAL 9005 black
Customization options	tube length external electrical cable
Net lamp weight	0,6 kg

Codes

BMLA3908026DAN

PACKAGE

Package 01

Certificazioni




Structure


black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

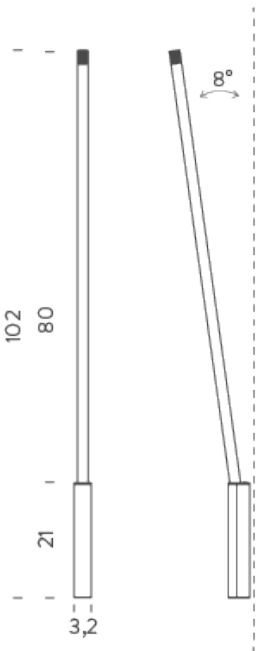

MINIFLUX LINEA WALL

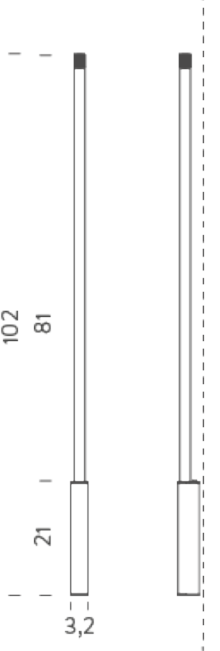

WALL 8° | 3000K

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
Energy class
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Mechanical impact protection code
Notes

LED strip
12W
direct
push-button
24V
3000K
717lm
60m/W
SDCM<3
>97
F
40
102xø3,2cm
polycarbonate
-20°C / +35°C
25°C
IK08
wall support with integrated driver and dimmable
push button included | driver included | RAL 9005
black
tube length | external electrical cable
0,6 kg

Customization options
Net lamp weight

Codes

BMLA3908026WAN

PACKAGE

Package 01

Certificazioni




Structure


black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

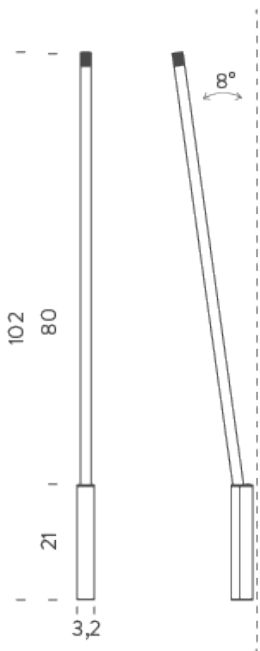

MINIFLUX LINEA WALL

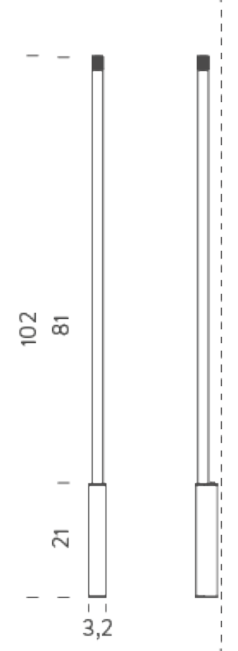

WALL | 2700K

LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	2700K
Luminous flux	681lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	

LED strip
12W
direct
push-button
24V
2700K
681lm
57lm/W
SDCM<3
>97
40
102xø3,2cm
polycarbonate
-20°C / +35°C
25°C
IK08
wall support with integrated driver and dimmable
push button included driver included RAL 9005
black
tube length external electrical cable
0,6 kg

Customization options
Net lamp weight

Codes
BMLA3908026DAN

PACKAGE
Package 01


Certificazioni




Structure
black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

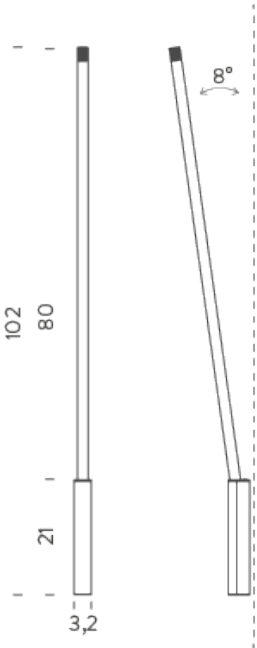

MINIFLUX LINEA WALL

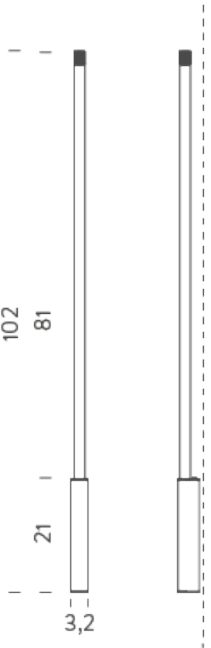

WALL | 3000K

LAMPING

Source	LED strip
Total power	12W
Emission	direct
Switching	push-button
Tension	24V
Color temperature	3000K
Luminous flux	717lm
Initial luminaire efficacy	60lm/W
Initial chromaticity	SDCM<3
Typ CRI	>97
IP class	40
Dimensions	102xø3,2cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	wall support with integrated driver and dimmable push button included driver included RAL 9005 black
Customization options	tube length external electrical cable
Net lamp weight	0,6 kg

Codes

BMLA3908026WAN

PACKAGE

Package 01

Certificazioni




Structure

black

Dimension: 140x8x8 cm / Gross weight: 2,4 kg

MINIFLUX LINEA WALL 8°

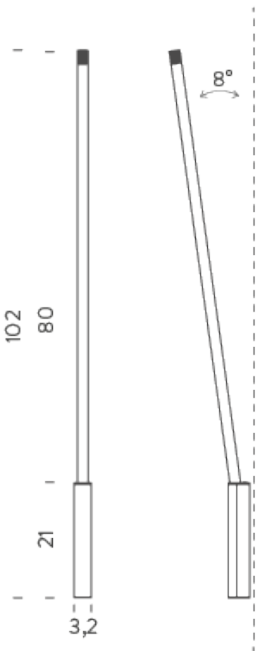

MINIFLUX LINEA WALL

