

# WALKLINE FAÇADE

Walkline Façade est un système d'éclairage de plafond LED linéaire pour extérieur, destiné à l'éclairage de façade. Il est composé d'un profilé en aluminium anodisé naturel et d'une surface en résine transparente. Walkline Façade peut être orienté et est disponible en différentes longueurs et avec optique wallwasher 30°. Il est dimmable 1-10V, DALI ou DMX.



0,61M | 3000K

LAMPING

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Source                            | LED strip                            |
| Total power                       | 11W                                  |
| Emission                          | wallwasher 30°                       |
| Switching                         | according to driver                  |
| Tension                           | 24VDC                                |
| Color temperature                 | 3000K                                |
| Luminous flux                     | 1030lm                               |
| Initial luminaire efficacy        | 94lm/W                               |
| Initial chromaticity              | SDCM<3                               |
| Typ CRI                           | 90                                   |
| Energy class                      | F                                    |
| IP class                          | 67                                   |
| Dimensions                        | 61,4x3x4,6cm                         |
| Materials                         | aluminium + PU resin                 |
| Ambient temperature range         | -20°C / +35°C                        |
| Performance ambient temperature   | 25°C                                 |
| Mechanical impact protection code | IK10                                 |
| Notes                             | driver not included, cable length 1m |
| Customization options             | CCT 2700K, body length               |
| Net lamp weight                   | 1,5 kg                               |

Codes

BWLFS806452WAA

Structure


grey

PACKAGE

Package 01

Dimension: 63x3x9 cm / Gross weight: 1,5 kg

Certificazioni

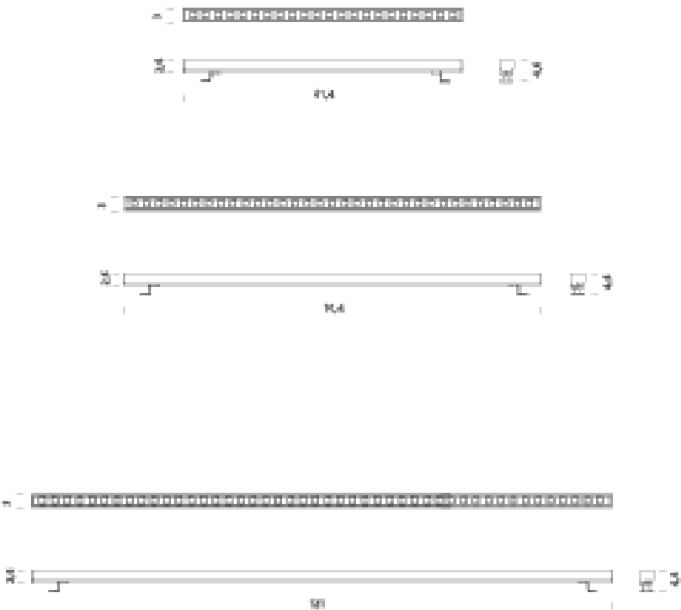

0,61M | 4000K

LAMPING

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Source                            | LED strip                            |
| Total power                       | 11W                                  |
| Emission                          | wallwasher 30°                       |
| Switching                         | according to driver                  |
| Tension                           | 24VDC                                |
| Color temperature                 | 4000K                                |
| Luminous flux                     | 1144lm                               |
| Initial luminaire efficacy        | 104lm/W                              |
| Initial chromaticity              | SDCM<3                               |
| Typ CRI                           | 90                                   |
| Energy class                      | F                                    |
| IP class                          | 67                                   |
| Dimensions                        | 61,4x3x4,6cm                         |
| Materials                         | aluminium + PU resin                 |
| Ambient temperature range         | -20°C / +35°C                        |
| Performance ambient temperature   | 25°C                                 |
| Mechanical impact protection code | IK10                                 |
| Notes                             | driver not included, cable length 1m |
| Customization options             | CCT 2700K, body length               |
| Net lamp weight                   | 1,5 kg                               |

Codes

BWLFS806452NAA

Structure


grey

PACKAGE

Package 01

Dimension: 63x3x9 cm / Gross weight: 1,5 kg

Certificazioni

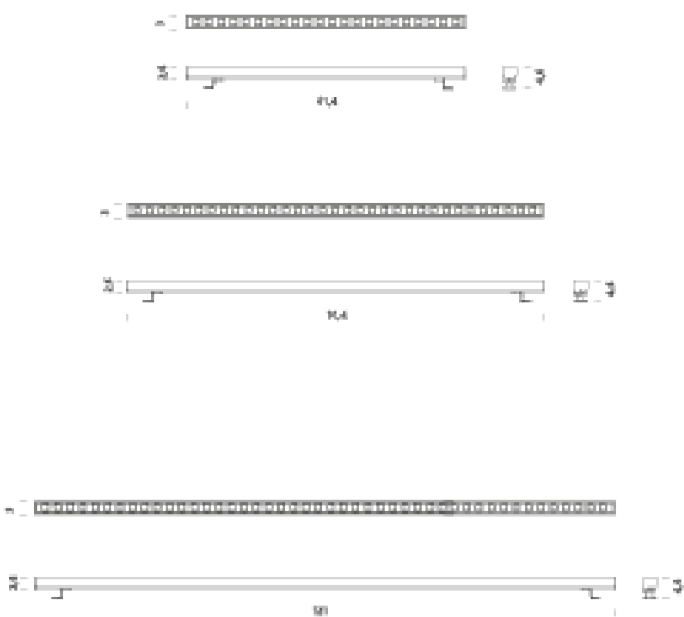

0,91M | 3000K

LAMPING

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Source                            | LED strip                            |
| Total power                       | 16W                                  |
| Emission                          | wallwasher 30°                       |
| Switching                         | according to driver                  |
| Tension                           | 24VDC                                |
| Color temperature                 | 3000K                                |
| Luminous flux                     | 2060lm                               |
| Initial luminaire efficacy        | 129lm/W                              |
| Initial chromaticity              | SDCM<3                               |
| Typ CRI                           | 90                                   |
| Energy class                      | F                                    |
| IP class                          | 67                                   |
| Dimensions                        | 91,4x3x4,6cm                         |
| Materials                         | aluminium + PU resin                 |
| Ambient temperature range         | -20°C / +35°C                        |
| Performance ambient temperature   | 25°C                                 |
| Mechanical impact protection code | IK10                                 |
| Notes                             | driver not included, cable length 1m |
| Customization options             | CCT 2700K, body length               |
| Net lamp weight                   | 2,3 kg                               |

Codes

BWLFS809452WAA

PACKAGE

Package 01


Certificazioni



Structure

grey

Dimension: 93x3x9 cm / Gross weight: 2,3 kg

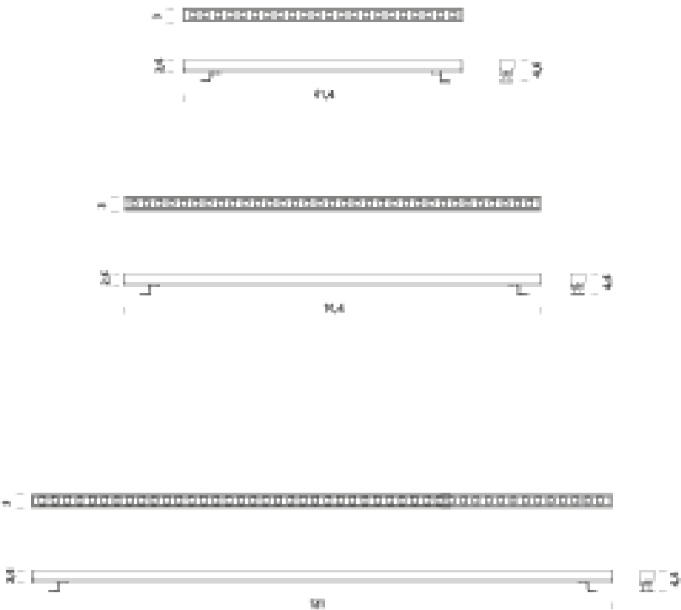

0,91M | 4000K

LAMPING

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Source                            | LED strip                            |
| Total power                       | 16W                                  |
| Emission                          | wallwasher 30°                       |
| Switching                         | according to driver                  |
| Tension                           | 24VDC                                |
| Color temperature                 | 4000K                                |
| Luminous flux                     | 2228lm                               |
| Initial luminaire efficacy        | 139lm/W                              |
| Initial chromaticity              | SDCM<3                               |
| Typ CRI                           | 90                                   |
| Energy class                      | F                                    |
| IP class                          | 67                                   |
| Dimensions                        | 91,4x3x4,6cm                         |
| Materials                         | aluminium + PU resin                 |
| Ambient temperature range         | -20°C / +35°C                        |
| Performance ambient temperature   | 25°C                                 |
| Mechanical impact protection code | IK10                                 |
| Notes                             | driver not included, cable length 1m |
| Customization options             | CCT 2700K, body length               |
| Net lamp weight                   | 2,3 kg                               |

Codes

BWLFS809452NAA

Structure


grey

PACKAGE

Package 01

Dimension: 93x3x9 cm / Gross weight: 2,3 kg

Certificazioni

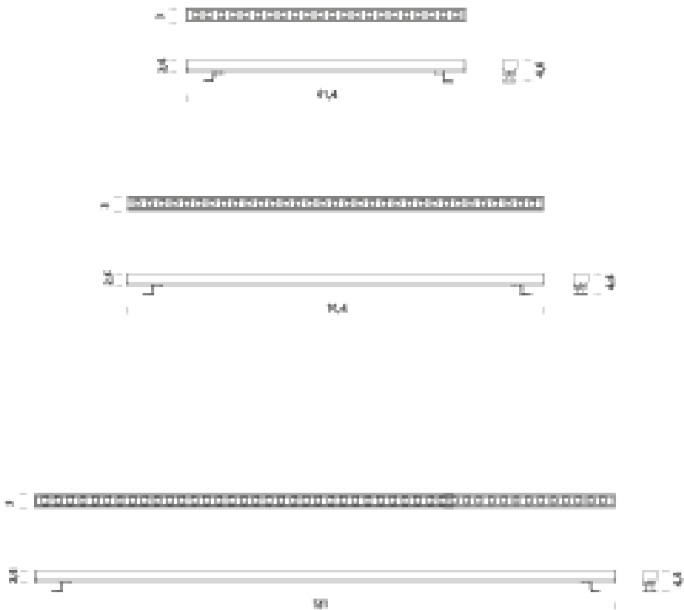

1,21M | 3000K

LAMPING

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Source                            | LED strip                            |
| Total power                       | 22W                                  |
| Emission                          | wallwasher 30°                       |
| Switching                         | according to driver                  |
| Tension                           | 24VDC                                |
| Color temperature                 | 3000K                                |
| Luminous flux                     | 3433lm                               |
| Initial luminaire efficacy        | 156lm/m                              |
| Initial chromaticity              | SDCM<3                               |
| Typ CRI                           | 90                                   |
| Energy class                      | F                                    |
| IP class                          | 67                                   |
| Dimensions                        | 121,4x3x4,6cm                        |
| Materials                         | aluminium + PU resin                 |
| Ambient temperature range         | -20°C / +35°C                        |
| Performance ambient temperature   | 25°C                                 |
| Mechanical impact protection code | IK10                                 |
| Notes                             | driver not included, cable length 1m |
| Customization options             | CCT 2700K, body length               |
| Net lamp weight                   | 3 kg                                 |

Codes

BWLFS812452WAA

PACKAGE

Package 01


Certificazioni



Structure

grey

Dimension: 123x3x9 cm / Gross weight: 3 kg

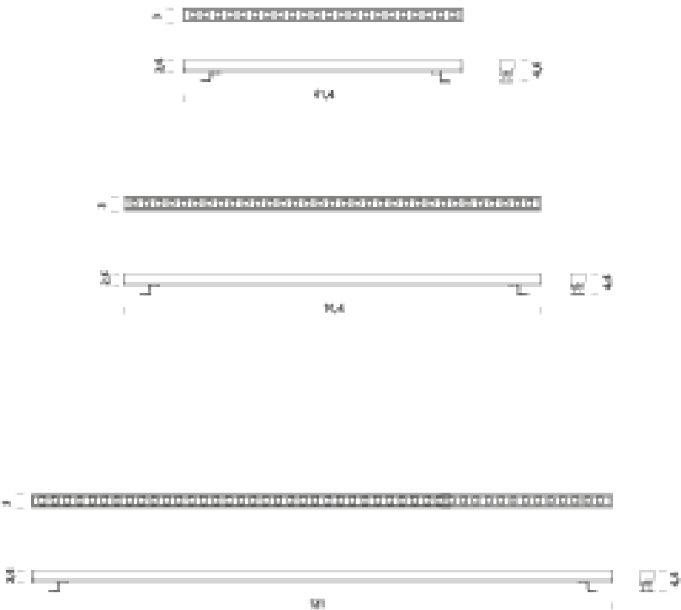

1,21M | 4000K

LAMPING

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Source                            | LED strip                            |
| Total power                       | 22W                                  |
| Emission                          | wallwasher 30°                       |
| Switching                         | according to driver                  |
| Tension                           | 24VDC                                |
| Color temperature                 | 4000K                                |
| Luminous flux                     | 3815lm                               |
| Initial luminaire efficacy        | 173lm/W                              |
| Initial chromaticity              | SDCM<3                               |
| Typ CRI                           | 90                                   |
| Energy class                      | F                                    |
| IP class                          | 67                                   |
| Dimensions                        | 121,4x3x4,6cm                        |
| Materials                         | aluminium + PU resin                 |
| Ambient temperature range         | -20°C / +35°C                        |
| Performance ambient temperature   | 25°C                                 |
| Mechanical impact protection code | IK10                                 |
| Notes                             | driver not included, cable length 1m |
| Customization options             | CCT 2700K, body length               |
| Net lamp weight                   | 3 kg                                 |

Codes

BWLFS812452NAA

Structure

grey

PACKAGE

Package 01

Dimension: 123x3x9 cm / Gross weight: 3 kg

Certificazioni

