

PATTERN

Pattern est un spot downlight encastré, composé d'un module de lentilles avec optique fixe. Il est disponible en finition noire dans les trois puissances 6W, 10W et 20W. Driver non inclus.



6W | 2700K

LAMPING

Source	3x LED
Total power	6W
Emission	direct 36°
Switching	according to driver
Tension	700mA
Color temperature	2700K
Luminous flux	441lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	9,8x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,29 kg

Codes

MPAT2103U67DNE

Structure


black

PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,29 kg

Certificazioni

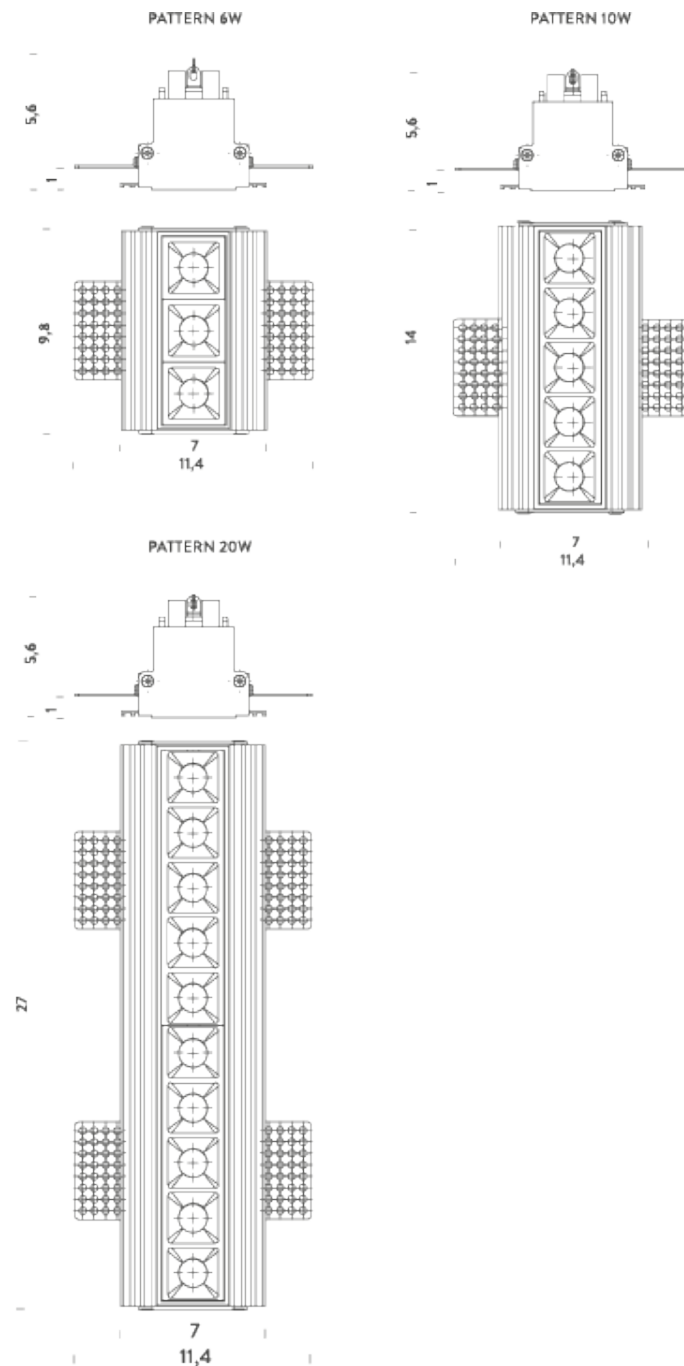

6W | 3000K

LAMPING

Source	3x LED
Total power	6W
Emission	direct 36°
Switching	according to driver
Tension	700mA
Color temperature	3000K
Luminous flux	490lm
Initial luminaire efficacy	82lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	9,8 5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,29 kg

Codes

MPAT2103U67WNE

PACKAGE

Package 01


Certificazioni



Structure

black

Dimension: 19x8x8,5 cm / Gross weight: 0,29 kg

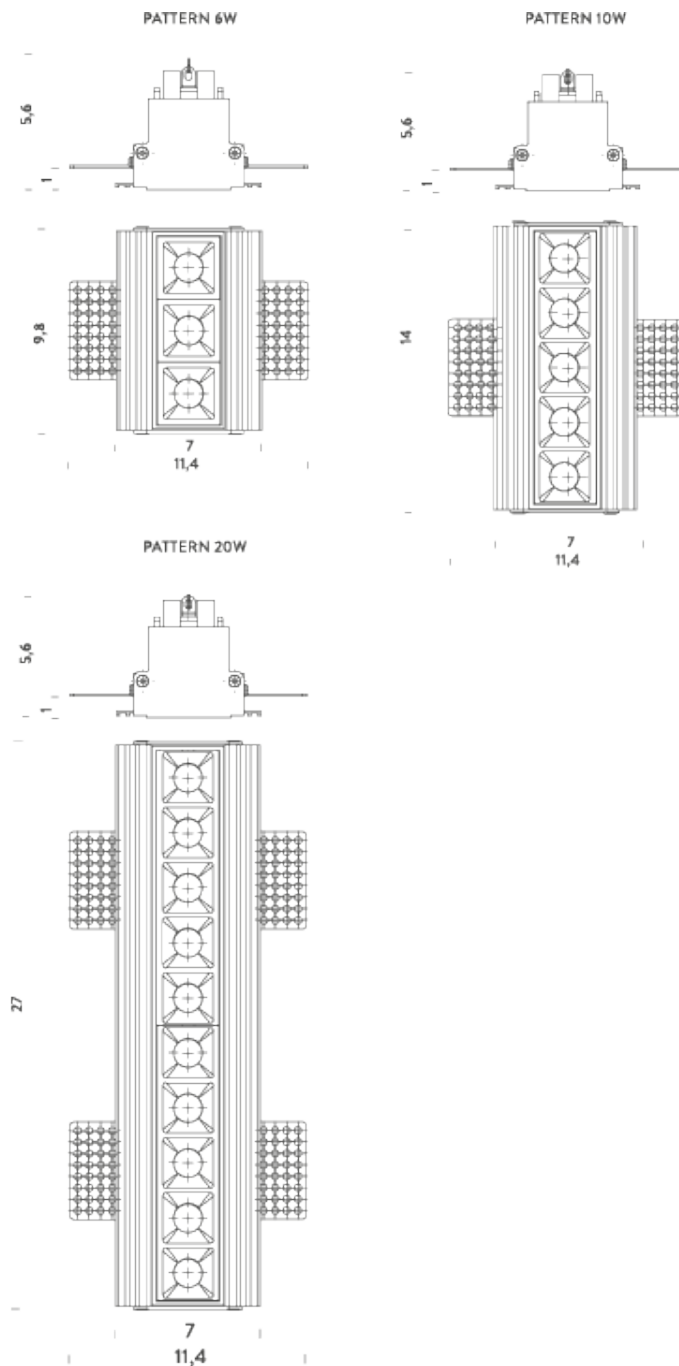

10W | 2700K

LAMPING

Source	5x LED
Total power	10W
Emission	direct 36°
Switching	according to driver
Tension	700mA
Color temperature	2700K
Luminous flux	660lm
Initial luminaire efficacy	66lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	14,1x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°c
Notes	RAL 9005 black , driver not included
Net lamp weight	0,53 kg

Codes

MPAT2105U67DNE

Structure


black

PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,53 kg

Certificazioni

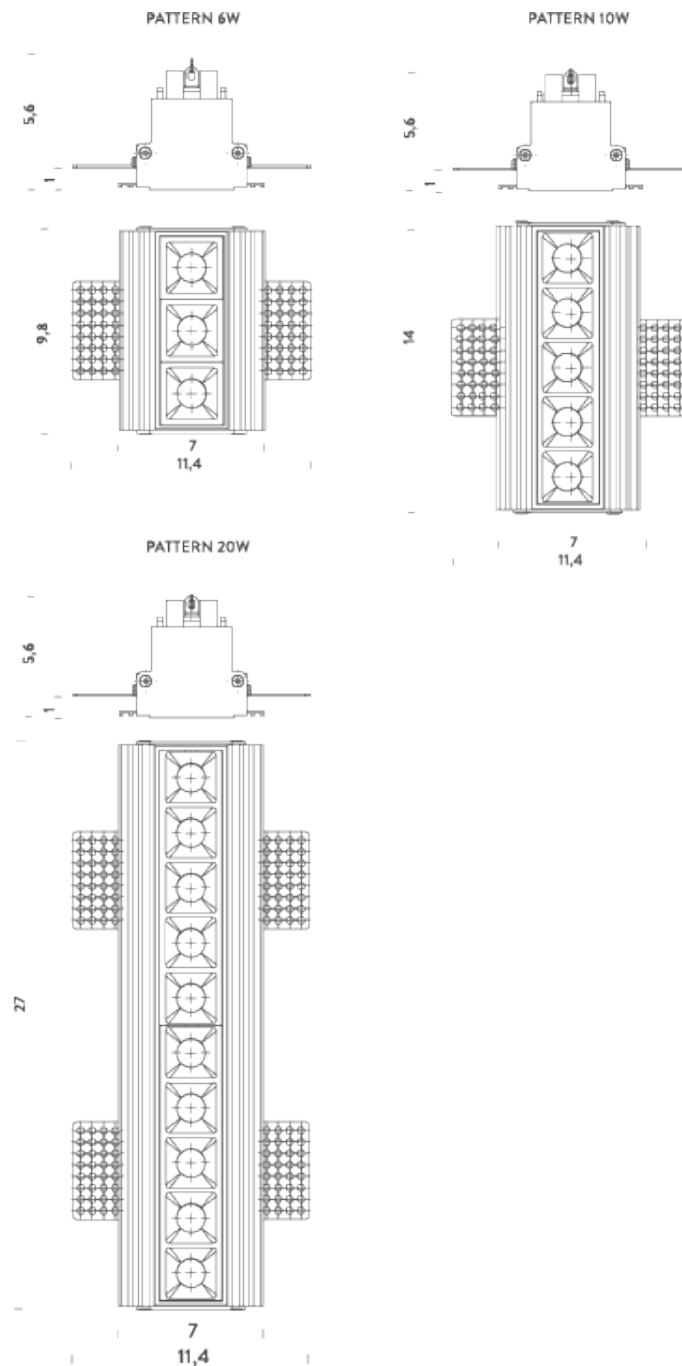

10W | 3000K

LAMPING

Source	5xLED
Total power	10W
Emission	direct 36°
Switching	according to driver
Tension	700mA
Color temperature	3000K
Luminous flux	736lm
Initial luminaire efficacy	74lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	14,1x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,53 kg

Codes

MPAT2105U67WNE

Structure


black

PACKAGE

Package 01

Dimension: 19x8x8,5 cm / Gross weight: 0,53 kg

Certificazioni

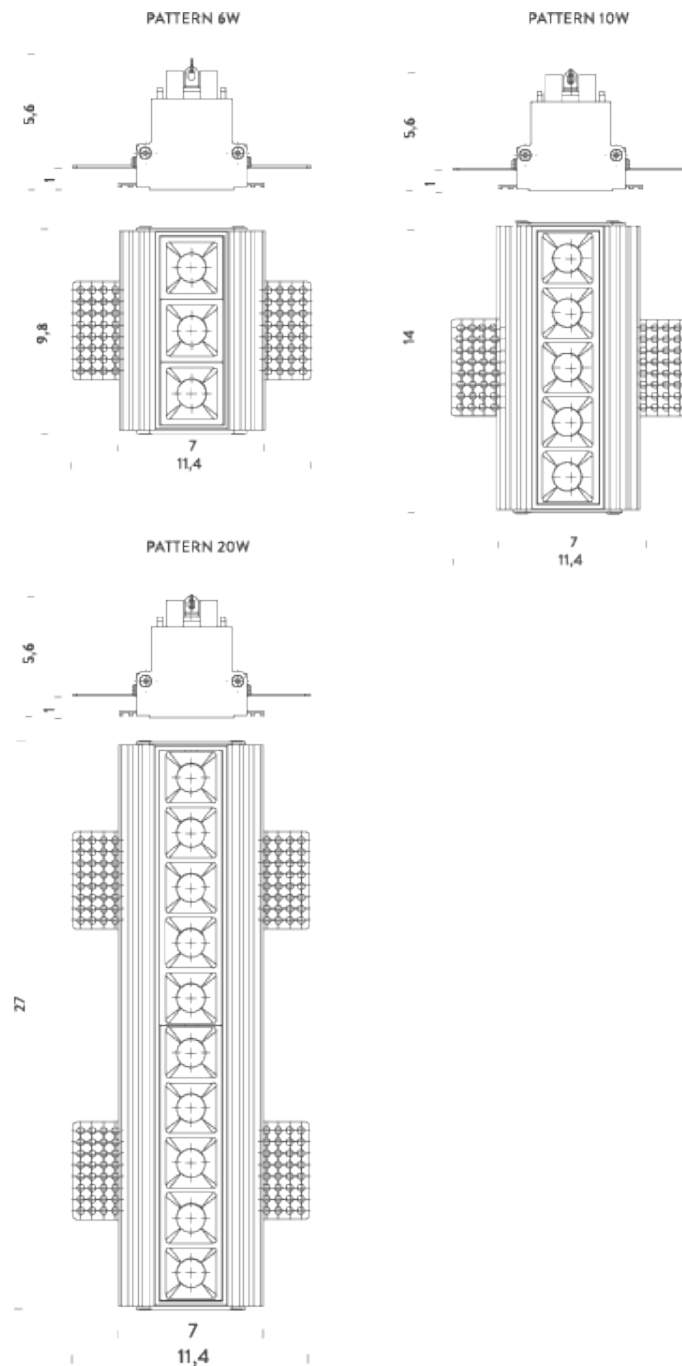

20W | 2700K

LAMPING

Source	10x LED
Total power	20W
Emission	direct 36°
Switching	according to driver
Tension	600mA
Color temperature	2700K
Luminous flux	1330lm
Initial luminaire efficacy	65lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	27,3x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,90 kg

Codes

MPAT2110U67DNE

Structure


black

PACKAGE

Package 01

Dimension: 32,5x8x8,5 cm / Gross weight: 0,90 kg

Certificazioni

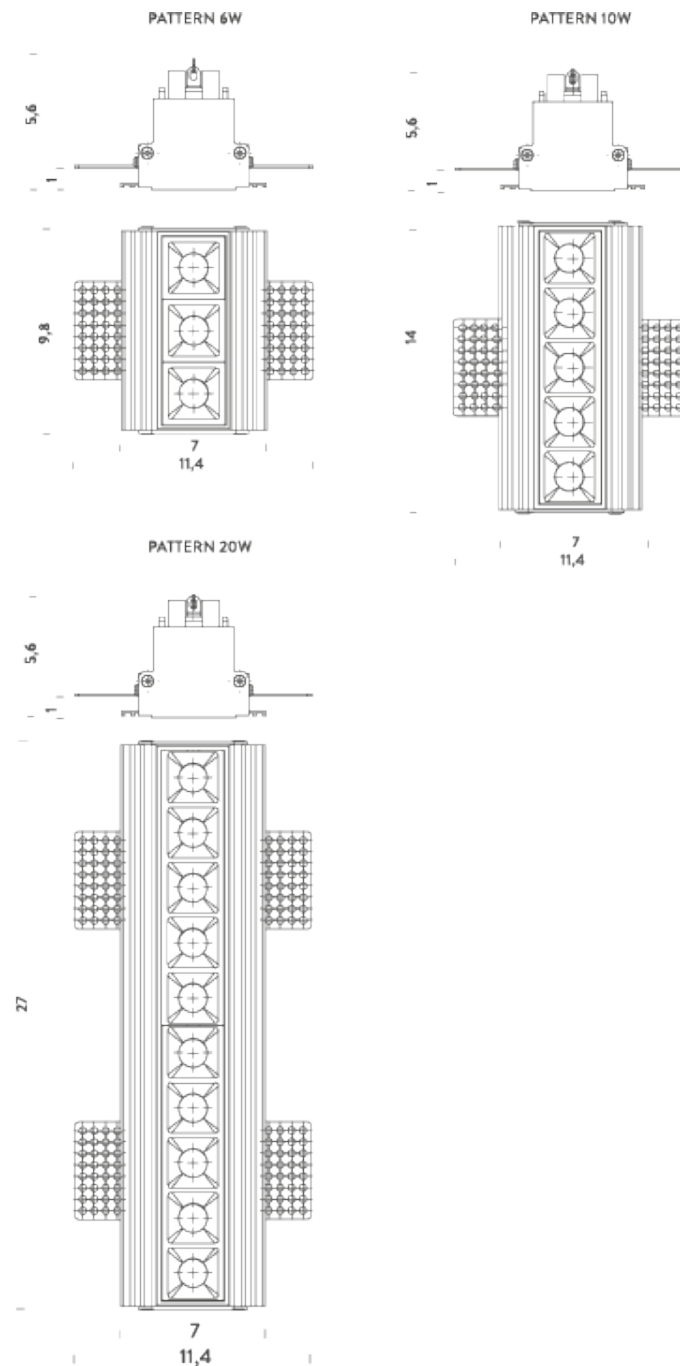

20W | 3000K

LAMPING

Source	10x LED
Total power	20W
Emission	direct 36°
Switching	according to driver
Tension	600mA
Color temperature	3000K
Luminous flux	1444lm
Initial luminaire efficacy	72lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	F
IP class	20
Dimensions	27,3x5,6x7cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	RAL 9005 black , driver not included
Net lamp weight	0,90 kg

Codes

MPAT2110U67WNE

Structure

black

PACKAGE

Package 01

Dimension: 32,5x8x8,5 cm / Gross weight: 0,90 kg

Certificazioni

