

SLACKLINE REGULAR

La famiglia SLACKLINE è composta da un'ampia selezione di profili in alluminio con differenti tipologie di fissaggio, dotati della stessa sorgente LED: Slackline Trim, Slackline Regular e Slackline Micro. Queste caratteristiche rendono l'impiego di Slackline molto flessibile in ogni ambiente.

Design minimal ed elevata qualità della luce.

Slackline rappresenta la soluzione ideale per realizzare soluzioni in linea continua (su richiesta).

A seconda del tipo di fissaggio, è proposto in differenti lunghezze standard e con CRI>94.



RECESSED | 1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	5,14x1,35x100,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options
Accessories
Net lamp weight

CCT 2700K, body length
Drivers 24VDC + DALI interface,
0,45 kg

Codes

BSLA2110G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

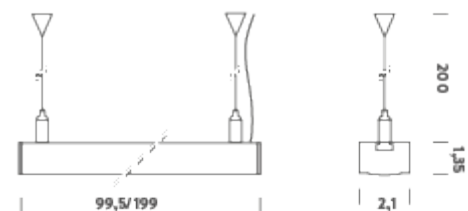

CEILING



RECESSED

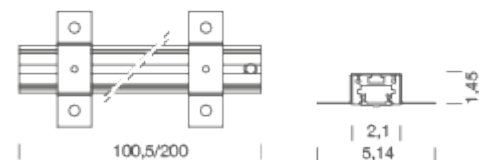

WALL MOUNTED



RECESSED | 1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	5,14x1,35x100,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options
Accessories
Net lamp weight

CCT 2700K, body length
Drivers 24VDC + DALI interface,
0,45 kg

Codes

BSLA2110G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

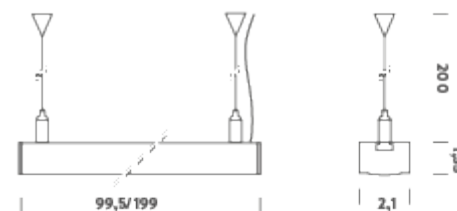


CEILING



RECESSED

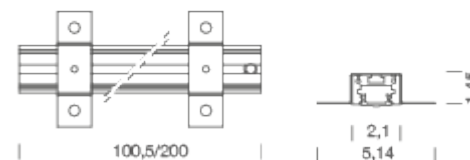

WALL MOUNTED

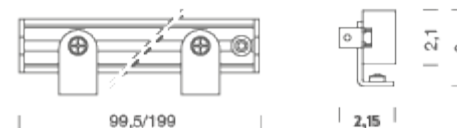

RECESSED | 2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	5,14x1,35x200cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options
Accessories
Net lamp weight

CCT 2700K, body length
Drivers 24VDC + DALI interface,
0,87 kg

Codes

BSLA2120G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

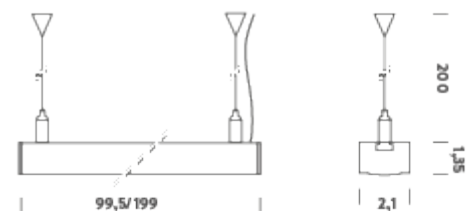

CEILING

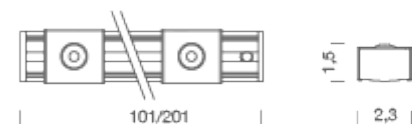

RECESSED

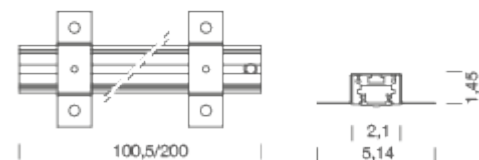

WALL MOUNTED



RECESSED | 2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	5,14x1,35x200cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA2120G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

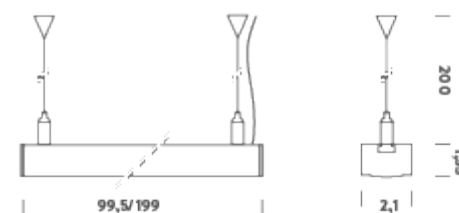


CEILING



RECESSED

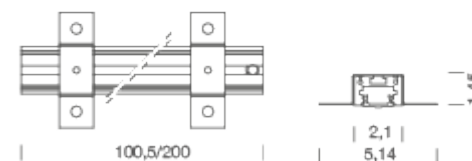

WALL MOUNTED



PENDANT | 1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,1x1,35x99,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options
Accessories
Net lamp weight

CCT 2700K, body length
Drivers 24VDC + DALI interface,
0,45 kg

Codes

BSLA0310G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

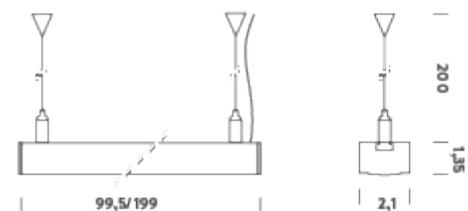

CEILING

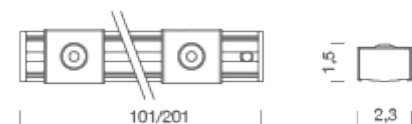

RECESSED

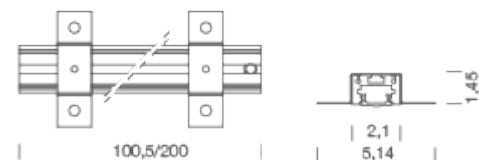

WALL MOUNTED



PENDANT | 1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,1x1,35x99,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options
Accessories
Net lamp weight

CCT 2700K, body length
Drivers 24VDC + DALI interface,
0,45 kg

Codes

BSLA0310G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

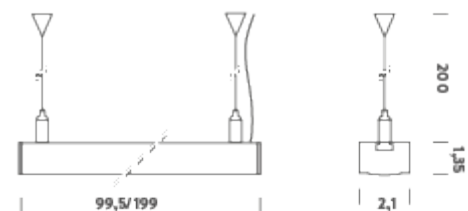

CEILING

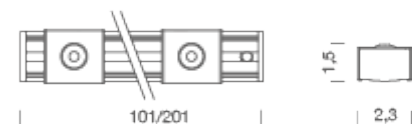

RECESSED

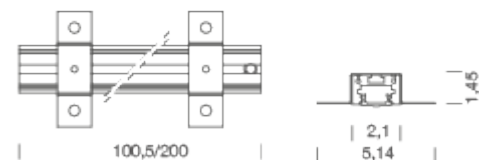

WALL MOUNTED



PENDANT | 2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,1x1,35x199,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options
Accessories
Net lamp weight

CCT 2700K, body length
Drivers 24VDC + DALI interface,
0,87 kg

Codes

BSLA0320G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

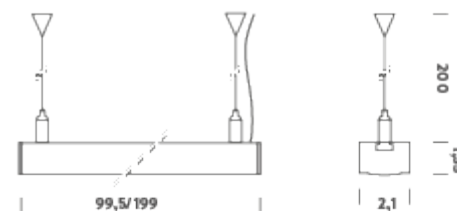


CEILING



RECESSED

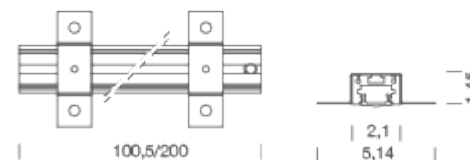

WALL MOUNTED

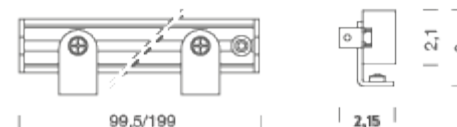

PENDANT | 2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according do driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,1x1,35x199,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options
Accessories
Net lamp weight

CCT 2700K, body length
Drivers 24VDC + DALI interface,
0,87 kg

Codes

BSLA0320G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

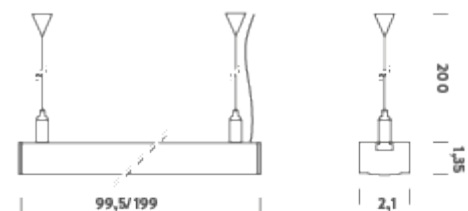

CEILING

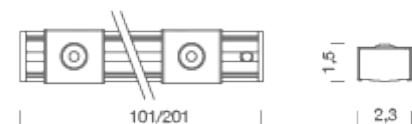

RECESSED

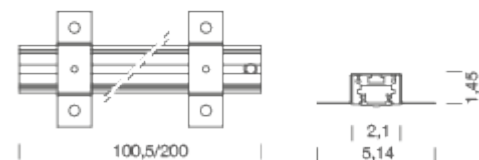

WALL MOUNTED



CEILING | 1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,3x1,5x101cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0410G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

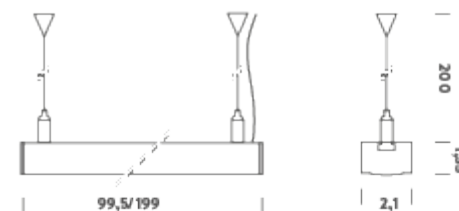


CEILING



RECESSED

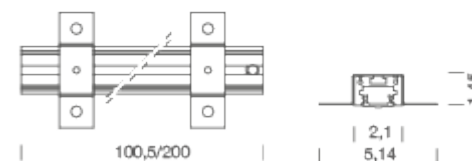

WALL MOUNTED

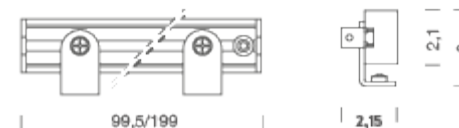

CEILING | 1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,3x1,5x101cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA0410G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni




SUSPENDED

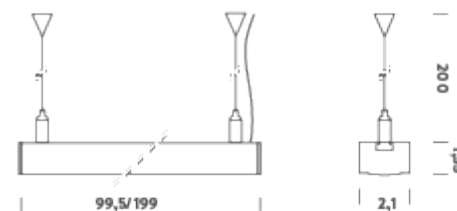


CEILING



RECESSED

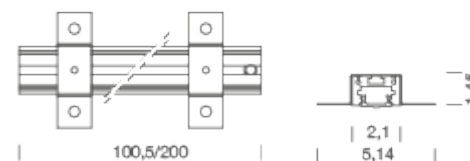

WALL MOUNTED



CEILING | 2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,3x1,5x201cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0420G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

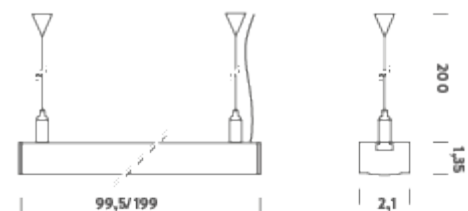

CEILING

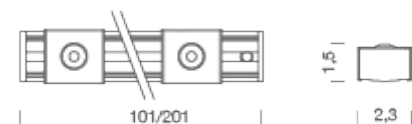

RECESSED

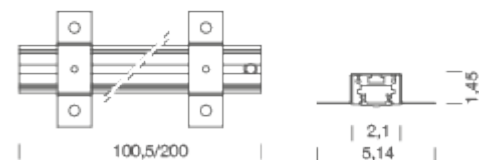

WALL MOUNTED



CEILING | 2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,3x1,5x201cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA0420G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg

Certificazioni




SUSPENDED

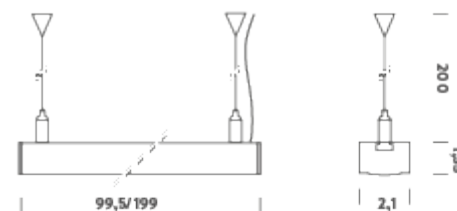


CEILING



RECESSED

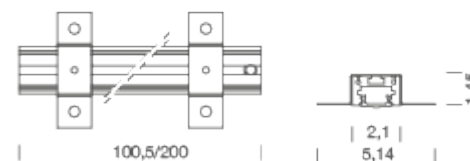

WALL MOUNTED

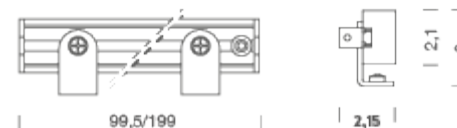

WALL | 1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	860lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,25x2,15x99,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,45 kg

Codes

BSLA4010G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

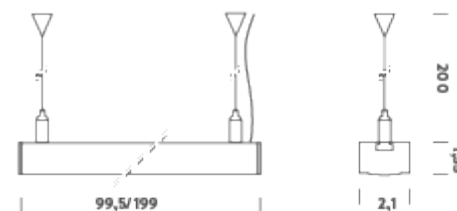


CEILING



RECESSED

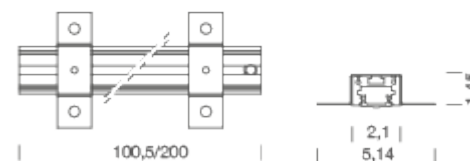

WALL MOUNTED

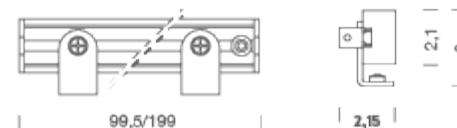

WALL | 1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	890lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,25x2,15x99,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options
Accessories
Net lamp weight

CCT 2700K, body length
Drivers 24VDC + DALI interface,
0,45 kg

Codes

BSLA4010G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg


Certificazioni




SUSPENDED

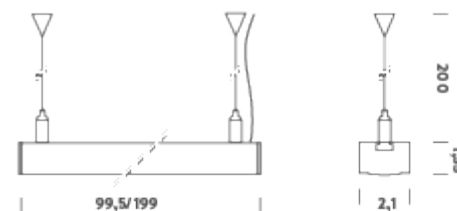


CEILING



RECESSED

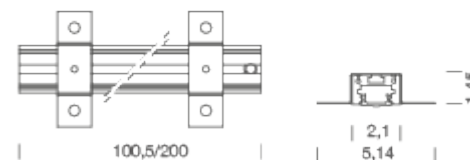

WALL MOUNTED

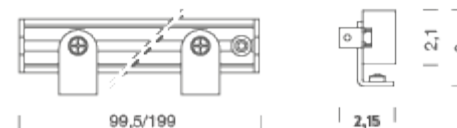

WALL | 2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1720lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM <3
Typ CRI	97
Energy class	F
IP class	40
Dimensions	2,25x2,15x199cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options
Accessories
Net lamp weight

CCT 2700K, body length
Drivers 24VDC + DALI interface,
0,87 kg

Codes

BSLA4020G26WAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

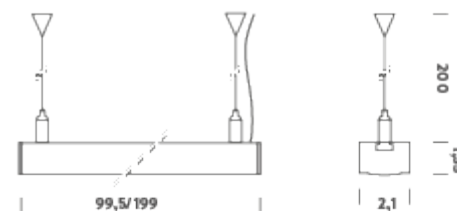


CEILING



RECESSED

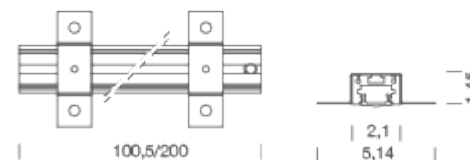

WALL MOUNTED

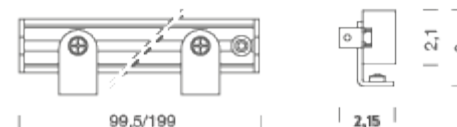

WALL | 2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1780lm
Initial luminaire efficacy	59lm/W
Initial chromaticity	SDCM <3
Typ CRI	94
Energy class	E
IP class	40
Dimensions	2,25x2,15x199cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°C
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m (ceiling, wall, recessed), 2m (pendant), Wooden fixing clip included for trim recessed version

Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,87 kg

Codes

BSLA4020G26NAA

Structure

grey

PACKAGE


Package 01

Dimension: 205x11x2,5 cm / Gross weight: 0,87 kg


Certificazioni




SUSPENDED

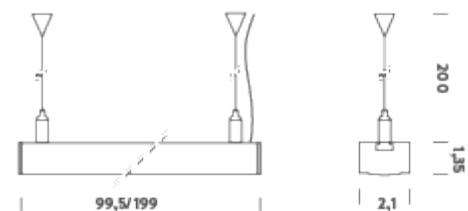

CEILING

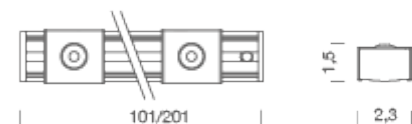

RECESSED

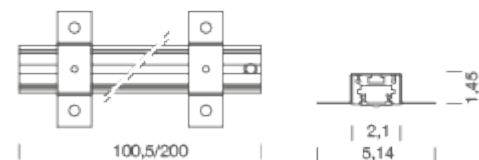

WALL MOUNTED

