


SLACKLINE MICRO

La famiglia SLACKLINE è composta da un'ampia selezione di profili in alluminio con differenti tipologie di fissaggio, dotati della stessa sorgente LED: Slackline Trim, Slackline Regular e Slackline Micro. Queste caratteristiche rendono l'impiego di Slackline molto flessibile in ogni ambiente.

Design minimal ed elevata qualità della luce.

Slackline rappresenta la soluzione ideale per realizzare soluzioni in linea continua (su richiesta).

A seconda del tipo di fissaggio, è proposto in differenti lunghezze standard e con CRI>94.

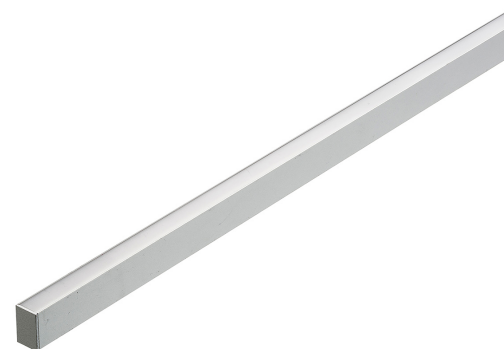

1M - 3000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	457lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x98,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,2 kg

Codes

BSLM0410G65WAA

Structure

grey

PACKAGE

Package 01

Dimension: 100x5x5 cm / Gross weight: 0,2 kg

Certificazioni



1M - 4000K

LAMPING

Source	LED strip
Total power	15W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	540lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x98,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,2 kg

Codes

BSLM0410G65NAA

Structure

grey

PACKAGE

Package 01

Dimension: 100x5x5 cm / Gross weight: 0,2 kg

Certificazioni



2M - 3000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	914lm
Initial luminaire efficacy	30lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x198,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,4 kg

Codes

BSLM0420G65WAA

Structure

grey

PACKAGE

Package 01

Dimension: 200x5x5 cm / Gross weight: 0,4 kg

Certificazioni



2M - 4000K

LAMPING

Source	LED strip
Total power	30W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1080lm
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
IP class	40
Dimensions	1,5x1x198,5cm
Materials	anodized aluminum
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,4 kg

Codes

BSLM0420G65NAA

Structure

grey

PACKAGE

Package 01

Dimension: 200x5x5 cm / Gross weight: 0,4 kg

Certificazioni



3M | 3000K



LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1377lm
Initial luminaire efficacy	31lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	1,5x1x298,5cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,60 kg

Codes

BSLM0430G65WAA

Structure

grey

PACKAGE

Package 01

Dimension: 300x5x5 cm / Gross weight: 0,60 kg

Certificazioni



3M | 4000K



LAMPING

Source	LED strip
Total power	45W
Emission	diffused
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4000K
Initial luminaire efficacy	36lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
IP class	40
Dimensions	1,5x1x298,5cm
Materials	anodized aluminium
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°C
Notes	driver not included, cable length 0,5m
Customization options	CCT 2700K, body length
Accessories	Drivers 24VDC + DALI interface,
Net lamp weight	0,6 kg

Codes

BSLM0430G65NAA

Structure

grey

PACKAGE

Package 01

Dimension: 300x5x5 cm / Gross weight: 0,6 kg

Certificazioni

