

MINIFLUX TRANSPARENT

MINIFLUX è un sistema a LED modulare per interni/esterni adatto all'illuminazione in velette, decorativa e d'accento.

Corpo in profilato in alluminio su cui è posizionata una striscia di Nastro LED 24V DC ad alta emissione. Diffusore in policarbonato trasparente. Il fissaggio avviene tramite staffe in policarbonato trasparente che permettono l'orientabilità del prodotto.

Miniflux è proposto in diverse lunghezze e temperature colore.

Il diametro del tubo in policarbonato varia a seconda del flusso luminoso della lampada.

Alimentatore escluso.



Ø1,6CM | 1M - 2700K

LAMPING

Source	LED strip
Total power	14,5W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1500lm
Initial luminaire efficacy	103lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	Ø1,6x104cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options

Accessories

Net lamp weight

CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,32 kg

Codes

BBOK0910041DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

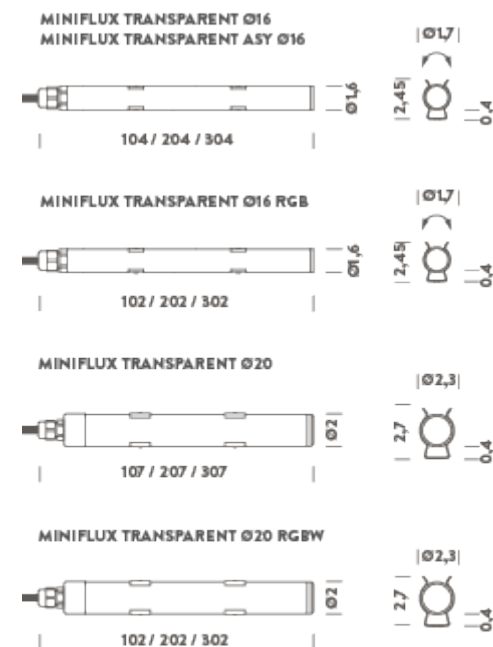

Ø1,6CM | 1M - 3000K

LAMPING

Source	LED strip
Total power	14,5W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1600lm
Initial luminaire efficacy	110lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	Ø1,6x104cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes

BBOK0910041WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

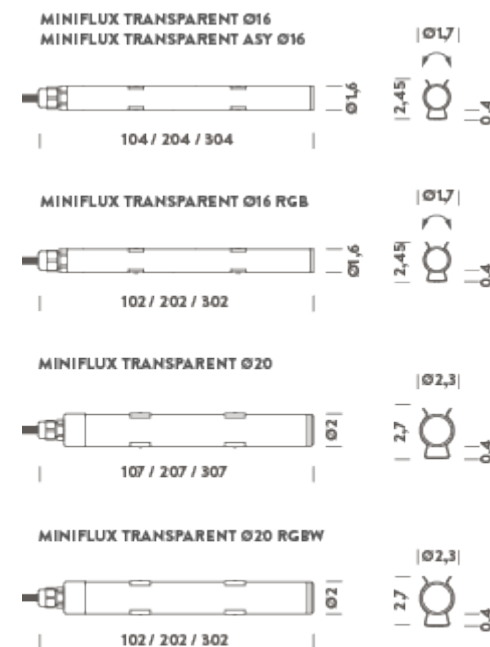

Ø1,6CM | 1M - 4000K

LAMPING

Source	LED strip
Total power	14,5W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1880lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	Ø1,6x104cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes

BBOK0910041NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

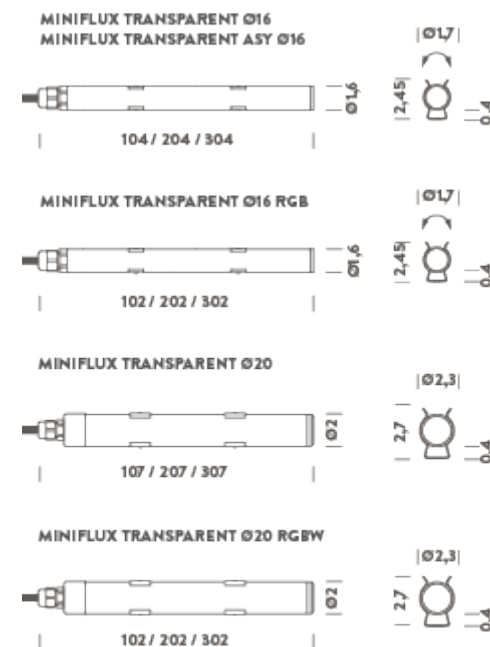

Ø1,6CM | 1M - 2700K ASY

LAMPING

Source	LED strip
Total power	14,5W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	1360lm
Initial luminaire efficacy	94lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	Ø1,6x104cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options

Accessories

Net lamp weight

CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,32 kg

Codes

BBOK0910241DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

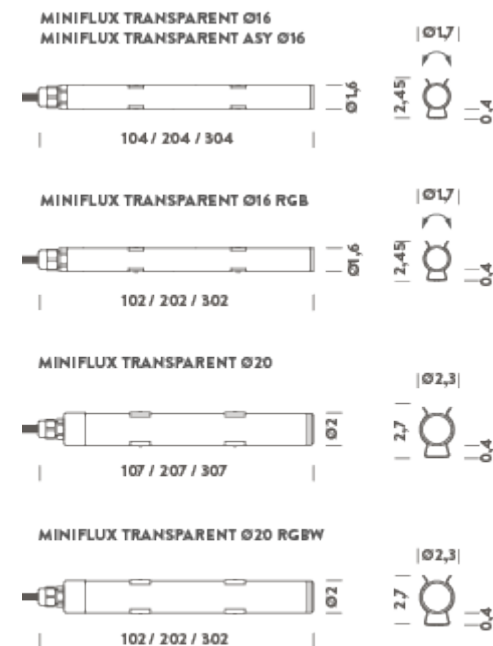

Ø1,6CM | 1M - 3000K ASY

LAMPING

Source	LED strip
Total power	14,5W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	1430lm
Initial luminaire efficacy	99lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x107cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options
Accessories

Net lamp weight

Codes

BBOK0910241WPC

PACKAGE

Package 01

Certificazioni




LED strip
14,5W
asymmetric
according to driver
24VDC
3000K
1430lm
99lm/W
SDCM <3
90
E
65
ø2x107cm
polycarbonate
-20°C / +50°C
25°C
IK08
clip included, driver and other accessory not included, cable length 2m
CCT 2700K, tube length
Connectors kit IP68, Drivers 24VDC + DALI interface,
0,32 kg

Structure

transparent

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

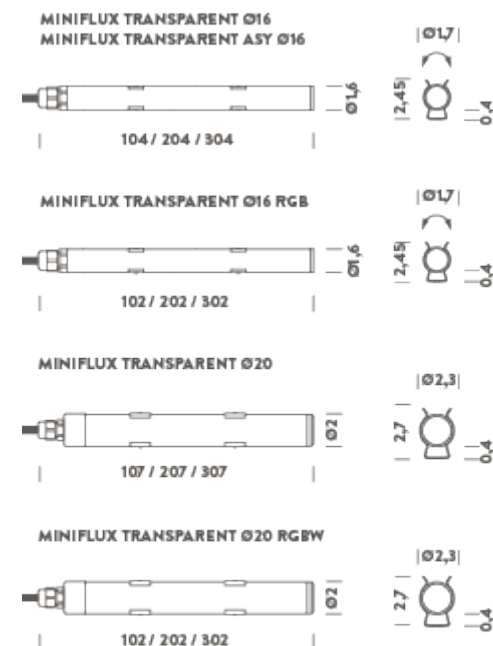

Ø1,6CM | 1M - 4000K ASY

LAMPING

Source	LED strip
Total power	14,5W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	1660lm
Initial luminaire efficacy	114lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x107cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,32 kg

Codes

BBOK0910241NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

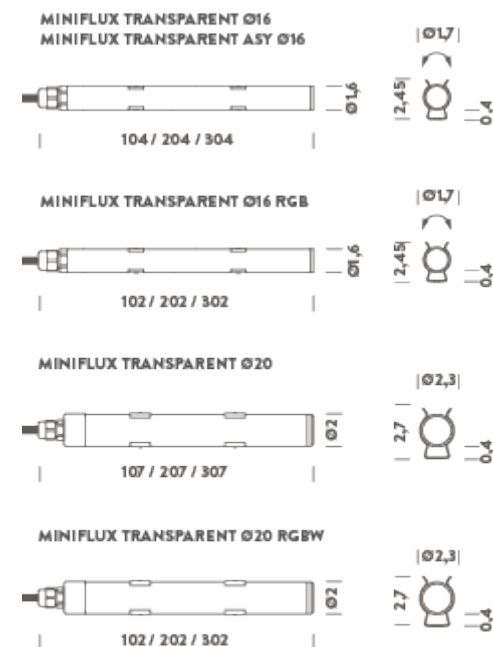

Ø1,6CM | 2M - 2700K

LAMPING

Source	LED strip
Total power	29W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	3000lm
Initial luminaire efficacy	103lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	Ø1,6x204cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920041DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

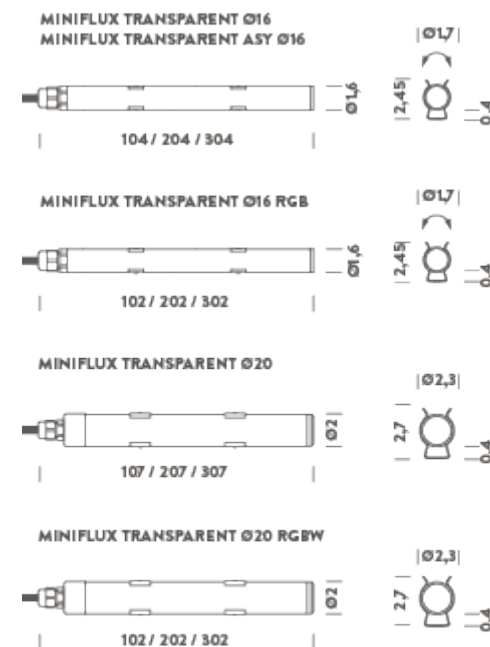

Ø1,6CM | 2M - 3000K

LAMPING

Source	LED strip
Total power	29W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	3200lm
Initial luminaire efficacy	100lm/W
Initial chromaticity	SDCM < 2
Typ CRI	90
Energy class	E
IP class	65
Dimensions	Ø1,6x204cm
Materials	polycarbonate
Ambient temperature range	- 20°C / 50°
Performance ambient temperature	25°
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920041WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

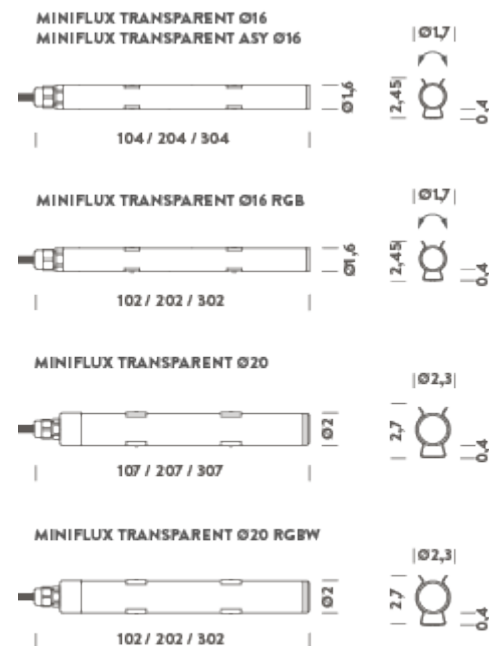

Ø1,6CM | 2M - 4000K

LAMPING

Source	LED strip
Total power	29W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3760lm
Initial luminaire efficacy	110lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	Ø1,6x204cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options

Accessories

Net lamp weight

CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,5 kg

Codes

BBOK0920041NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

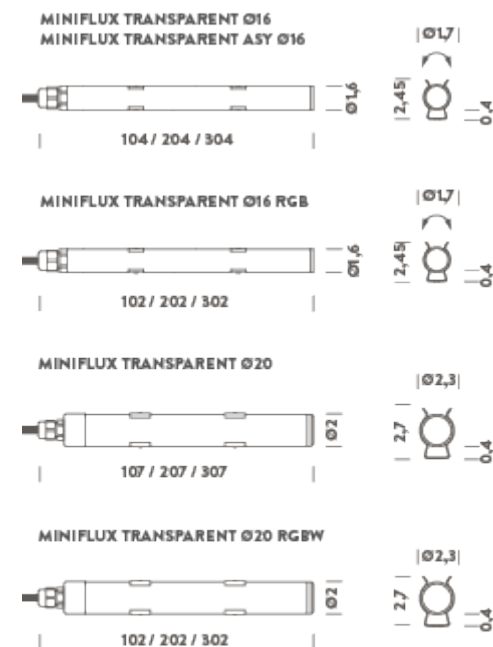

Ø1,6CM | 2M - 2700K ASY

LAMPING

Source	LED strip
Total power	29W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	2720lm
Initial luminaire efficacy	94lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920241DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

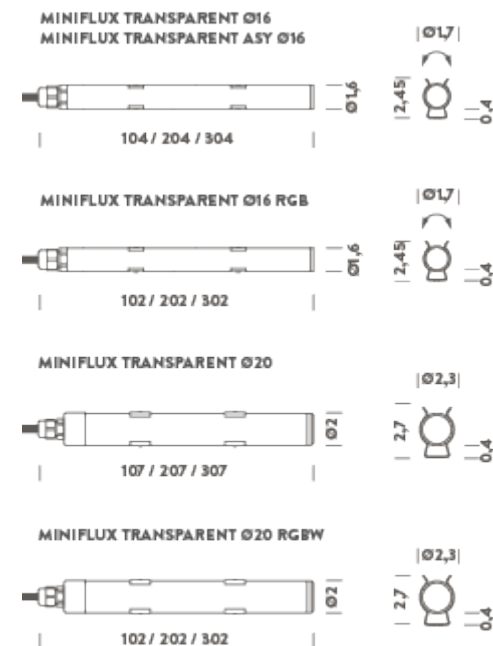

Ø1,6CM | 2M - 3000K ASY

LAMPING

Source	LED strip
Total power	29W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2860lm
Initial luminaire efficacy	99lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options
Accessories

Net lamp weight

Codes

BBOK0920241WPC

PACKAGE

Package 01

Certificazioni




clip included, driver and other accessory not included, cable length 2m
CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,5 kg

Structure

transparent

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

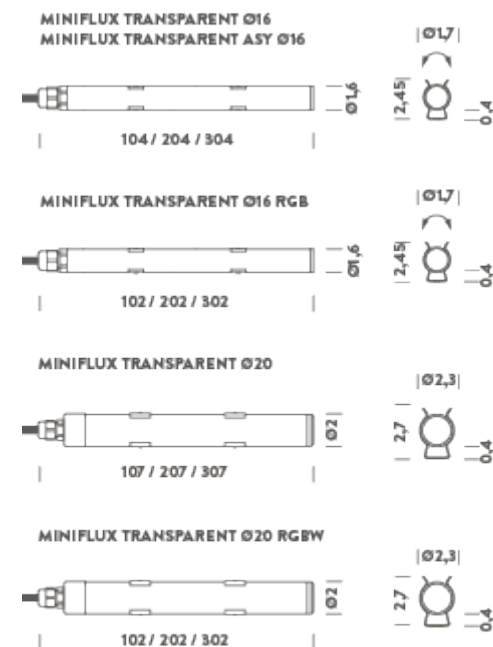

Ø1,6CM | 2M - 4000K ASY

LAMPING

Source	LED strip
Total power	29W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	3320lm
Initial luminaire efficacy	114lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,5 kg

Codes

BBOK0920241NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

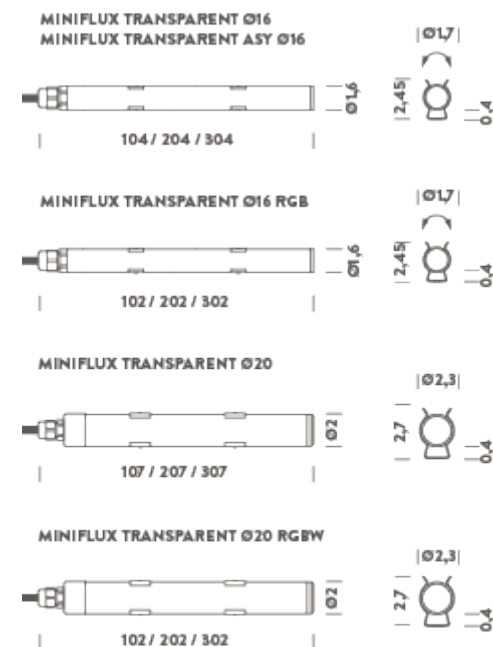

Ø1,6CM | 3M - 2700K

LAMPING

Source	LED strip
Total power	42W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4500lm
Initial luminaire efficacy	107lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	Ø1,6x304cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

BBOK0930041DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

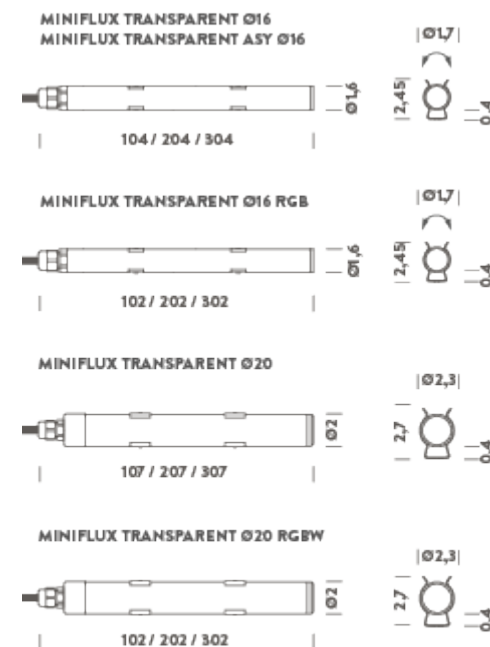

Ø1,6CM | 3M - 3000K

LAMPING

Source	LED strip
Total power	42W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4800lm
Initial luminaire efficacy	114lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø1,6x304cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

BBOK0930041WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

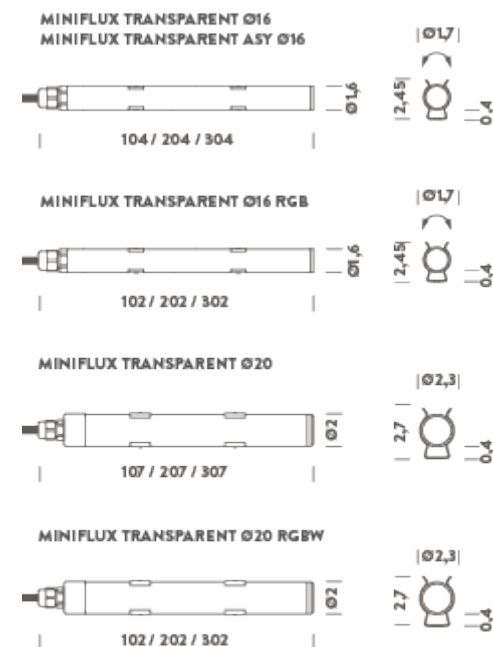

Ø1,6CM | 3M - 4000K

LAMPING

Source	LED strip
Total power	42W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5640lm
Initial luminaire efficacy	134lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	Ø1,6x304cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

BBOK0930041NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

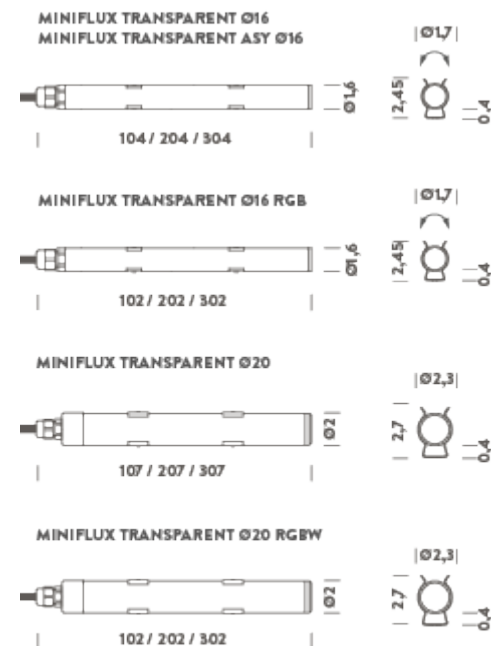

Ø1,6CM | 3M - 2700K ASY

LAMPING

Source	LED strip
Total power	42W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	2700K
Luminous flux	4080lm
Initial luminaire efficacy	97lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

BBOK0930241DPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

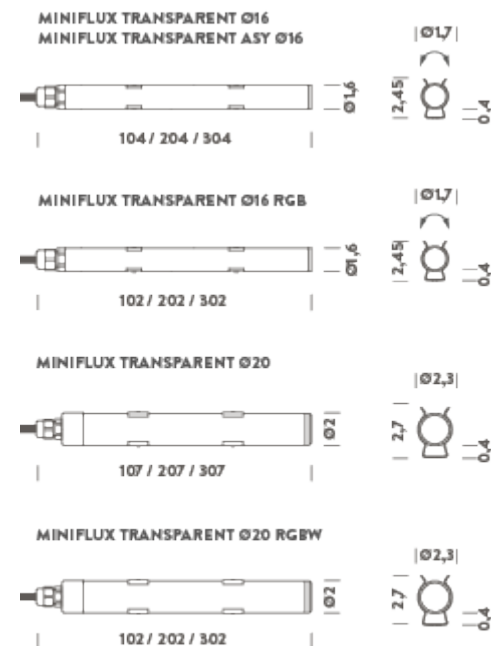

Ø1,6CM | 3M - 3000K ASY

LAMPING

Source	LED strip
Total power	42W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	4290lm
Initial luminaire efficacy	102lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	E
IP class	65
Dimensions	ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

BBOK0930241WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

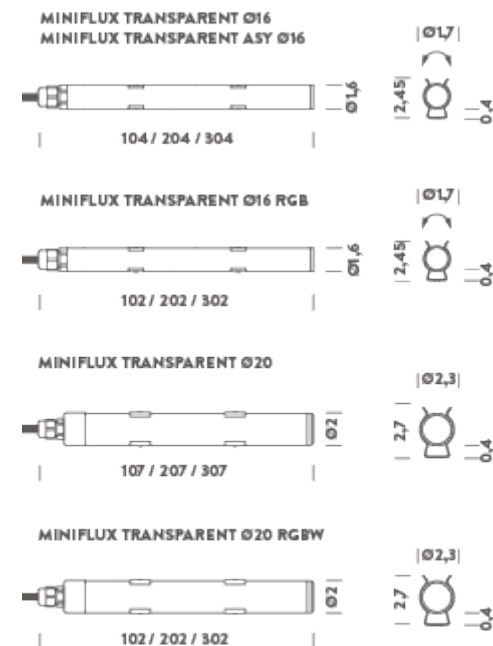

Ø1,6CM | 3M - 4000K ASY

LAMPING

Source	LED strip
Total power	42W
Emission	asymmetric
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	4980lm
Initial luminaire efficacy	119lm/W
Initial chromaticity	SDCM <3
Typ CRI	90
Energy class	D
IP class	65
Dimensions	ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +50°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	CCT 2700K, tube length
Accessories	Connectors kit IP68, Drivers 24VDC + DALI interface,
Net lamp weight	0,72 kg

Codes

BBOK0930241NPC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

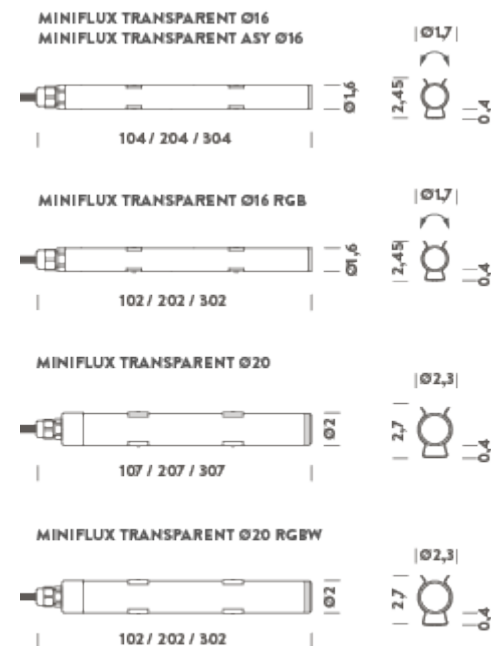

Ø2CM | 1M - 3000K

LAMPING

Source	LED strip
Total power	20W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	Ø2x107cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08

Notes

clip included, driver and other accessory not included, cable length 2m
CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,32 kg

Customization options

Accessories

Net lamp weight

Codes

BBOK0910015WPC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

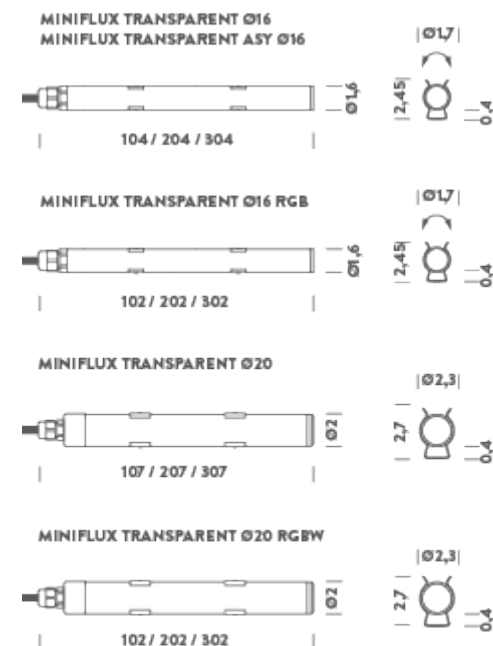

Ø2CM | 1M - 4000K

LAMPING

Source	LED strip
Total power	20W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	2600lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	Ø2x107cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options
Accessories

Net lamp weight

Codes

BBOK0910015NPC

PACKAGE

Package 01

Certificazioni




LED strip
20W
direct 120°
according to driver
24VDC
4000K
2600lm
130lm/W
SDCM <3
80
D
65
Ø2x107cm
polycarbonate
-20°C / +35°C
25°C
IK08
clip included, driver and other accessory not included, cable length 2m
CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,32 kg

Structure

transparent

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

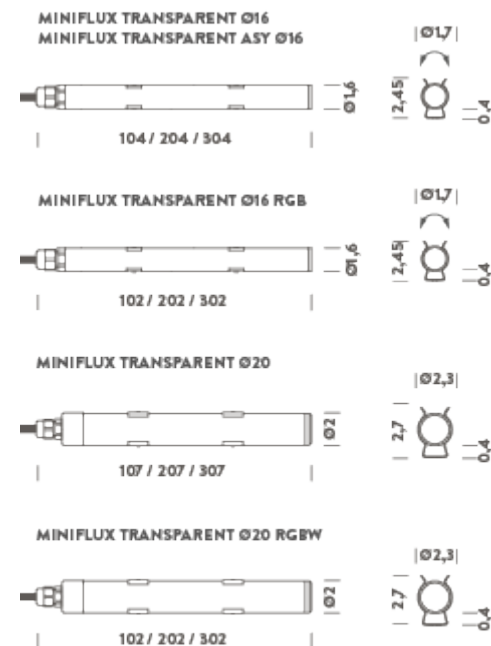

Ø2CM | 2M - 3000K

LAMPING

Source	LED strip
Total power	40W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options
Accessories

Net lamp weight

Codes

BBOK0920015WPC

PACKAGE

Package 01


Certificazioni



LED strip
40W
direct 120°
according to driver
24VDC
3000K
5200lm
130lm/W
SDCM <3
80
D
65
ø2x207cm
polycarbonate
-20°C / +35°C
25°C
IK08
clip included, driver and other accessory not included, cable length 2m
CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,5 kg

Structure
transparent

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

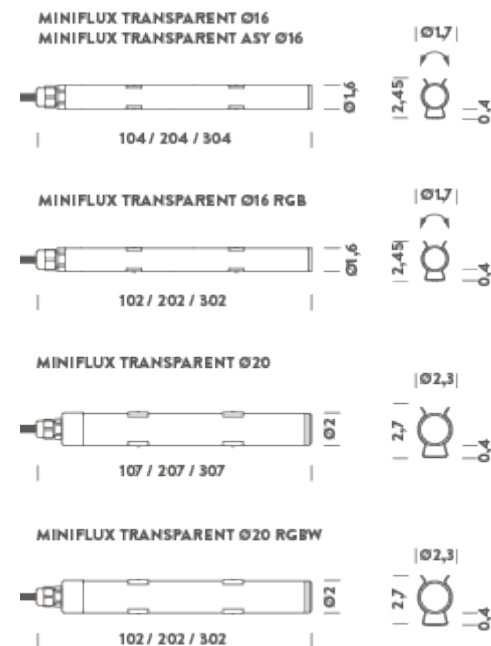

Ø2CM | 2M - 4000K

LAMPING

Source	LED strip
Total power	40W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	5200lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	Ø2x207cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options
Accessories

Net lamp weight

Codes

BBOK0920015NPC

PACKAGE

Package 01


Certificazioni



LED strip
40W
direct 120°
according to driver
24VDC
4000K
5200lm
130lm/W
SDCM <3
80
D
65
Ø2x207cm
polycarbonate
-20°C / +35°C
25°C
IK08
clip included, driver and other accessory not included, cable length 2m
CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,5 kg

Structure
transparent

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

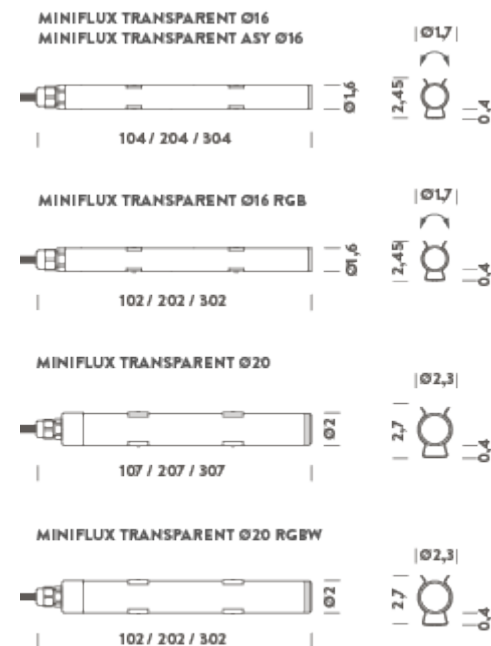

Ø2CM | 3M - 3000K

LAMPING

Source	LED strip
Total power	60W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	3000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	Ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options
Accessories

Net lamp weight

Codes

BBOK0930015WPC

PACKAGE

Package 01

Certificazioni




LED strip
60W
direct 120°
according to driver
24VDC
3000K
7800lm
130lm/W
SDCM <3
80
D
65
Ø2x307cm
polycarbonate
-20°C / +35°C
25°C
IK08
clip included, driver and other accessory not included, cable length 2m
CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,72 kg

Structure

transparent

Dimension: 320x8,5x4 cm / Gross weight: 0,73 kg

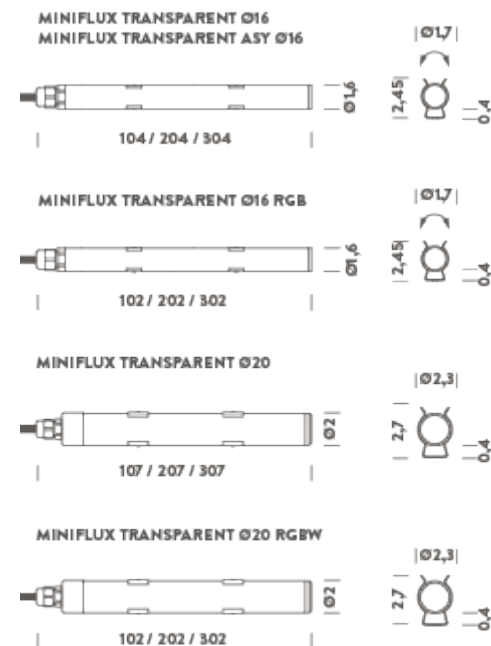

Ø2CM | 3M - 4000K

LAMPING

Source	LED strip
Total power	60W
Emission	direct 120°
Switching	according to driver
Tension	24VDC
Color temperature	4000K
Luminous flux	7800lm
Initial luminaire efficacy	130lm/W
Initial chromaticity	SDCM <3
Typ CRI	80
Energy class	D
IP class	65
Dimensions	Ø2x307cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m

Customization options
Accessories

Net lamp weight

Codes

BBOK0930015NPC

PACKAGE

Package 01

Certificazioni




clip included, driver and other accessory not included, cable length 2m
CCT 2700K, tube length
Connectors kit IP68, | Drivers 24VDC + DALI interface,
0,72 kg

Structure

transparent

Dimension: 320x8,5x4 cm / Gross weight: 0,73 kg

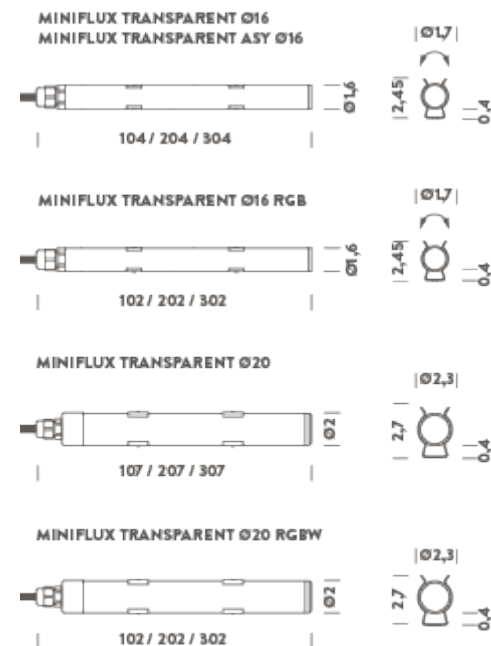

Ø1,6CM - RGB | 1M

LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGB
Typ CRI	90
IP class	65
Dimensions	ø1,6x102cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included cable length 2m
Customization options	tube length
Net lamp weight	0,32 kg

Codes

BBOK09100665PC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

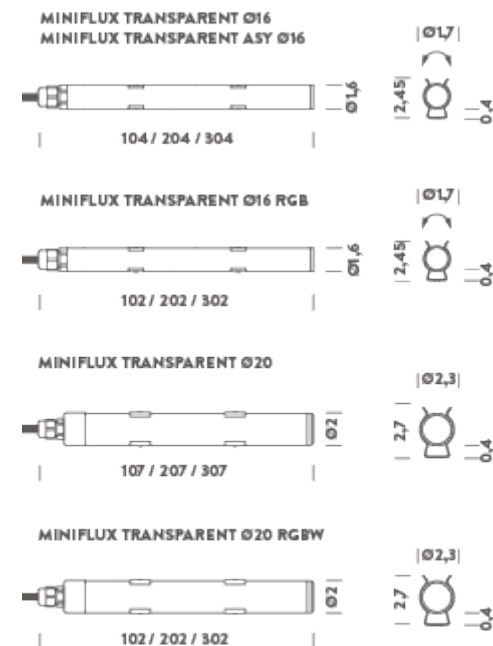

Ø1,6CM - RGB | 2M

LAMPING

Source	LED strip
Total power	30W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGB
Typ CRI	90
IP class	65
Dimensions	ø1,6x202cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included cable length 2m
Customization options	tube length
Net lamp weight	0,5 kg

Codes

BBOK09200665PC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x8 cm / Gross weight: 0,5 kg

Certificazioni

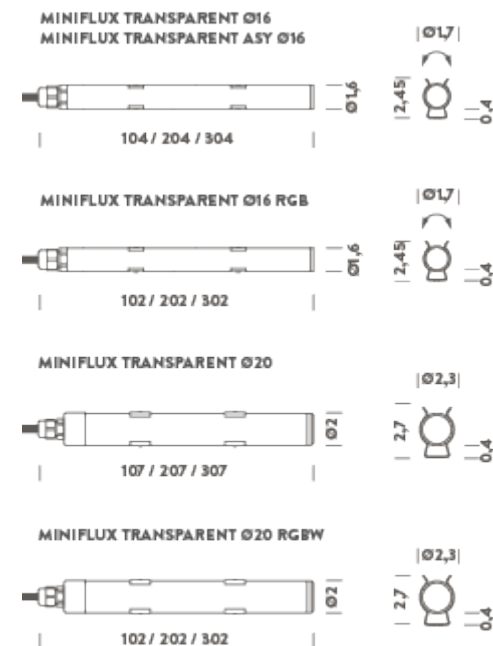

Ø1,6CM - RGB | 3M

LAMPING

Source	LED strip
Total power	45W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGB
Typ CRI	90
IP class	65
Dimensions	ø1,6x302cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included cable length 2m
Customization options	tube length
Net lamp weight	0,72 kg

Codes

BBOK09300665PC

Structure


transparent

PACKAGE

Package 01

Dimension: 320x8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

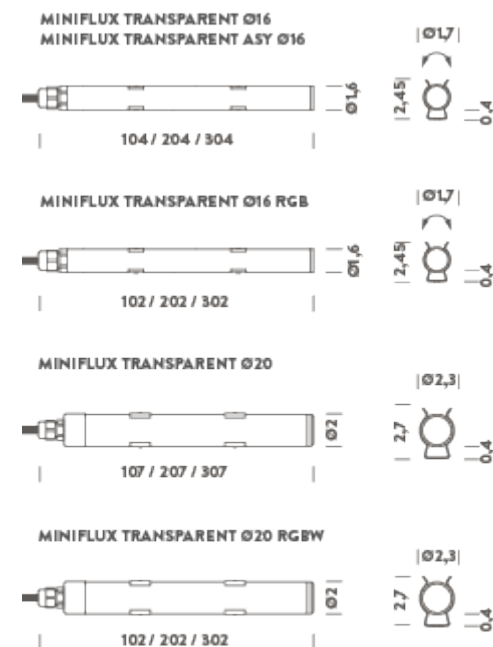

Ø2CM - RGBW | 1M

LAMPING

Source	LED strip
Total power	15W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGBW
Typ CRI	90
IP class	65
Dimensions	ø2x102cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included cable length 2m
Customization options	tube length
Net lamp weight	0,32 kg

Codes

BBOK09100728PC

Structure


transparent

PACKAGE

Package 01

Dimension: 120x8,5x4 cm / Gross weight: 0,32 kg

Certificazioni

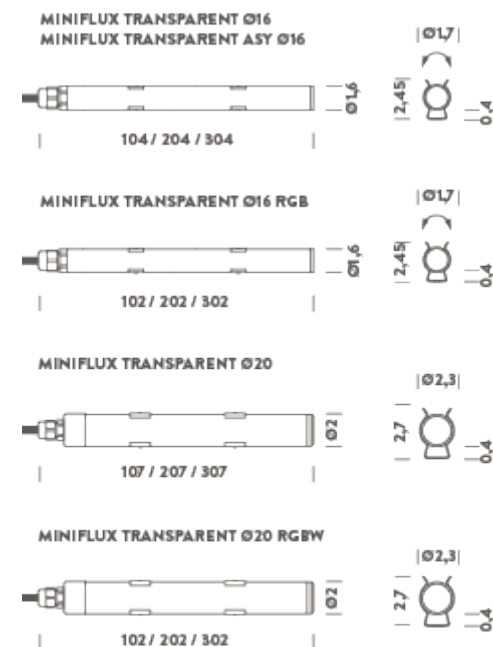

Ø2CM - RGBW | 2M

LAMPING

Source	LED strip
Total power	30W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGBW
Typ CRI	90
IP class	65
Dimensions	ø2x202cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	tube length
Net lamp weight	0,5 kg

Codes

BBOK09200728PC

Structure


transparent

PACKAGE

Package 01

Dimension: 220x8,5x4 cm / Gross weight: 0,5 kg

Certificazioni

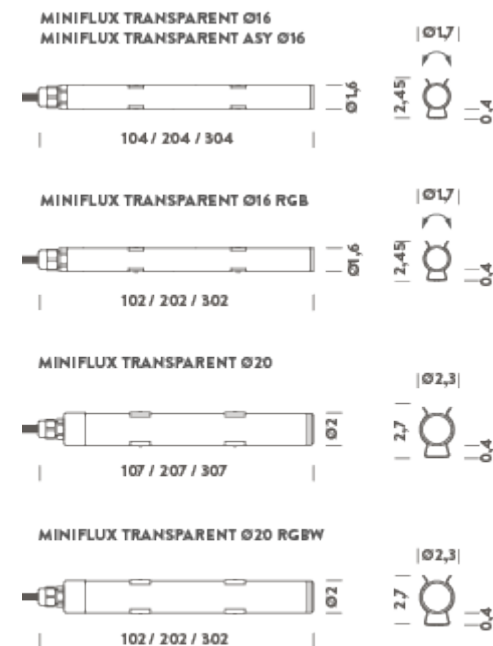

Ø2CM - RGBW | 3M

LAMPING

Source	LED strip
Total power	45W
Emission	direct
Switching	according to driver
Tension	24V DC
Color temperature	RGBW
Typ CRI	90
IP class	65
Dimensions	ø2x302cm
Materials	polycarbonate
Ambient temperature range	-20°C / +35°C
Performance ambient temperature	25°C
Mechanical impact protection code	IK08
Notes	clip included, driver and other accessory not included, cable length 2m
Customization options	tube length
Net lamp weight	0,72 kg

Codes

BBOK09300728PC

Structure

transparent

PACKAGE

Package 01

Dimension: 320,8,5x4 cm / Gross weight: 0,72 kg

Certificazioni

